

FSV SYSTEMS



INVERTER

12.1 - 25.0kW

Residential &
Light Commercial
Solutions



ALL INVERTER

22.4 - 224kW

Large Commercial Solutions



MOST SATISFIED CUSTOMERS
AIR CONDITIONERS 2016 - 2017



Panasonic
Air Conditioning

THE GAME CHANGER



ALL INVERTER

**FSV with Extraordinary Energy-Saving
Performance and Powerful Operation**

EER 4.7* (22.4kW model)

A game-changing FSV system delivering energy-saving performance, powerful operation, reliability and comfort surpassing anything previously possible.

It represents a true paradigm shift in air conditioning solutions.


Taking quality to the extreme — that's the Panasonic challenge.

Multiple large-capacity all inverter compressors (more than 14kW)

Enlarged heat exchanger surface area with triple surface

* For 22.4 & 28.0kW unit, the heat exchanger is 2 row design.

Newly designed curved air discharge bell mouth for better aerodynamics

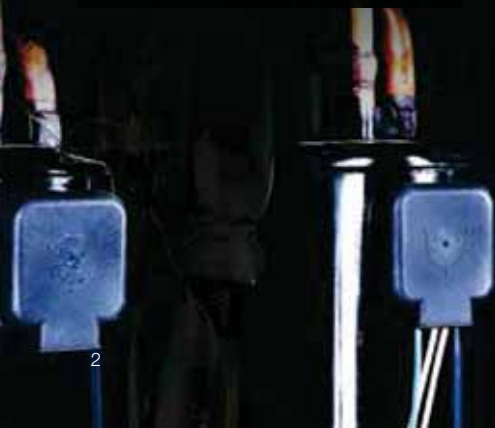



Extraordinary 4.7*

EER

*22.4kW Model

CONTENTS

02	FSV-EX Introduction	70	FSV Indoor Units	112	Installation Conditions / High Static Ducted
04	Mini-FSV Introduction	72	FSV Indoor Units Range	114	FSV Controllers
06	FSV-EX Advantages	74	F2 Type / Mid Static Ducted	116	Individual Control Systems
08	FSV-EX Series / Exclusive Feature 1 Extended Operation Range	78	M1 Type / Slim Low Static Ducted	119	Centralised Control Systems
10	FSV-EX Series / Exclusive Feature 2 Energy-Saving Performance	80	Z1 Type / Slim & Narrow Ducted	122	T10 Terminal for External Control
12	FSV-EX Series / Exclusive Feature 3 Oil Management System	82	E2 Type / High Static Ducted	123	Interfaces for External Control
14	Exclusive Feature / ECONAVI	84	E2 Type / Energy Saving High Fresh Air Ducted	124	Serial Interface for 3rd Party External Controller
16	Exclusive Feature / Deluxe Wired Remote Controller	86	E1 Type / High Static Ducted	125	Serial Interface for LonWorks Network
20	Exclusive Feature / Design Support Software for FSV	88	K2 Type / Wall Mounted	126	FSV Controller External Dimensions
22	FSV Systems	92	U2 Type / 4-Way Cassette	128	VRF Renewal
24	2-PIPE FSV-EX ME2 Series	100	Y2 Type / 4-Way Mini Cassette	132	A Globally Trusted Air Conditioning Brand
42	3-PIPE FSV MF2 Series	102	L1 Type / 2-Way Cassette	134	Reliability & Durability
58	2-PIPE Mini-FSV LE1 Series	104	D1 Type / 1-Way Cassette	136	Global Networking of Air Conditioning Solutions
		106	T2 Type / Ceiling Mounted	138	Panasonic VRF Global Project References
		108	P1 Type / Floor Standing		
		110	R1 Type / Concealed Floor Standing		

MINI GAME CHANGER



INVERTER


2-Pipe Mini-FSV LE1/ LE2 Series

Mini FSV with Extraordinary Energy-Saving Performance and High External Static Pressure (35Pa*)


A game-changing Mini-FSV delivering energy-saving performance, reliability and comfort. It achieved high external static pressure 35Pa*, ensuring heat dissipation and stable operation.



**High External Static Pressure
(35Pa*)**

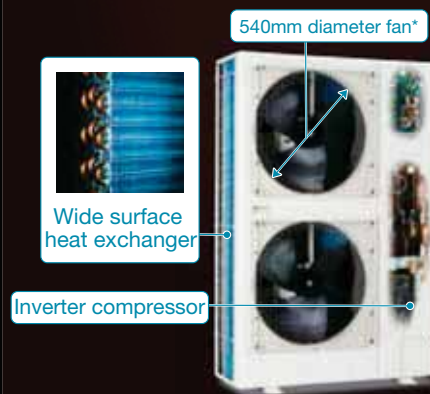

Energy Saving Technology

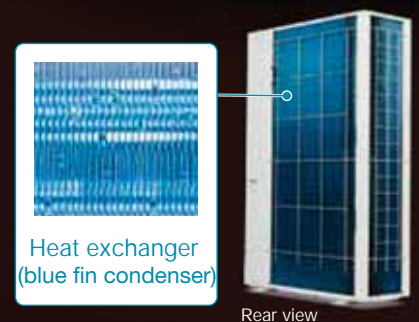

Blue Fin Condenser

*LE2, 22.4kW & 25.0kW only



Extraordinary
4.5^{*}
EER

*12.1kW LE2 only


FSV-EX Advantages

The most efficient, powerful and quiet system in Panasonic's history. There has never been a VRF system like it. It's the story of a true game changer – Panasonic FSV-EX.

Extraordinary energy-saving performance

The FSV-EX marks a revolutionary step forward in VRF efficiency. A look at the incredible EER value clearly indicates that. What's more, this high EER value is achieved even during part load operation.

This shows the extraordinary energy-saving performance the FSV-EX is capable of providing.

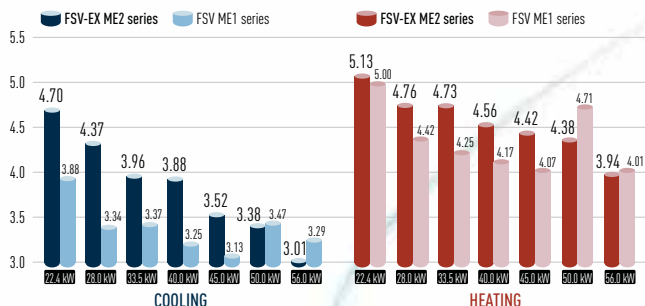


Extraordinary EER
throughout the product range

Extraordinary EER in Part load
throughout the product range



Extended operation range up to 52°C


The FSV-EX can provide cooling even when the outside temperature reaches a maximum of about 52°C. And amazingly, it can still operate at 100% capacity when the outside temperature is as high as 43°C. This high power capability enables reliable operation even under extremely high temperature conditions.

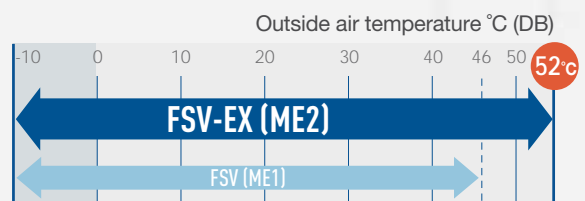



Low-noise operation

Numerous technological innovations, including an improved compressor and a newly designed bell mouth and larger fan, have dramatically reduced the outdoor noise level. The result is an even more comfortable building environment.

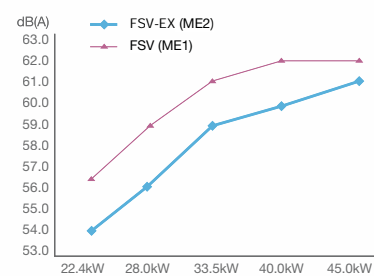

Multiple large-capacity All Inverter compressors

(more than 40kW)

Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.



Enlarged heat exchanger surface Area with triple surface*

The new heat exchanger features a triple-surface construction. Compared to the divided dual-surface construction in current models, there is no division of space and the area for heat exchange is larger. Also, highly efficient piping pattern increases heat exchange performance by 5%.

* For 22.4kW & 28.0kW unit, the heat exchanger is 2 row design.




Extended Operation Range up to 52°C

High reliability even under high temperature conditions


Designed to be durable enough to withstand extreme heat, FSV EX ensures reliable cooling operation over an extended operation range up to 52°C.

OPERATING RANGE

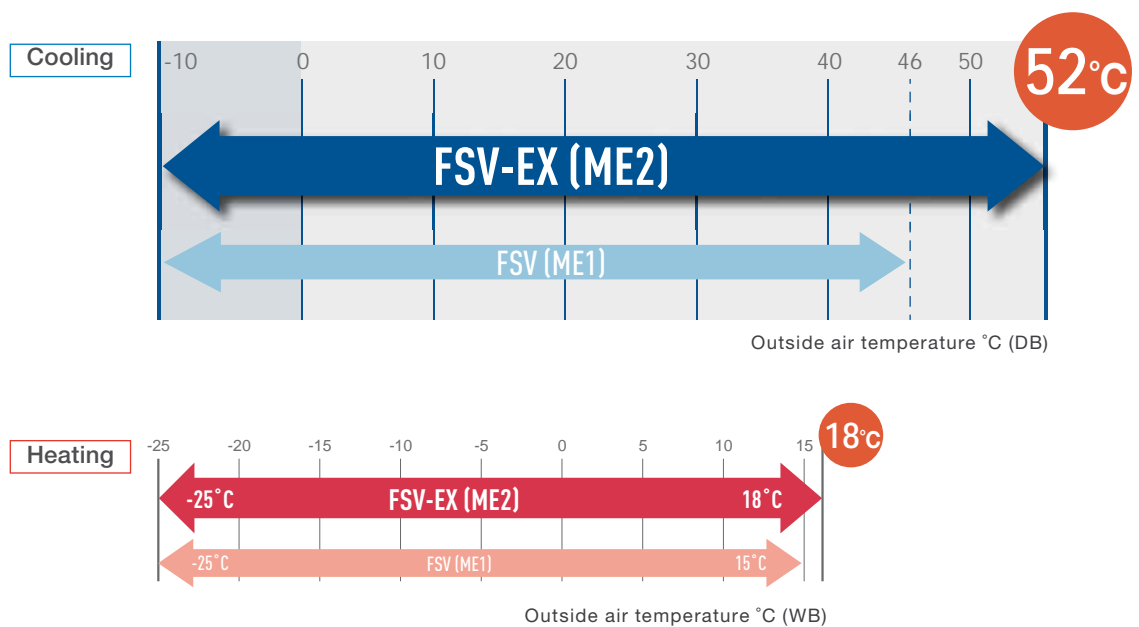

Full-capacity operation up to 43°C

The FSV-EX can provide cooling even when the outside temperature reaches a maximum of about 52°C. And amazingly, it can still operate at 100% capacity when the outside temperature is as high as 43°C. This high power capability enables reliable operation even under extremely high temperature conditions.

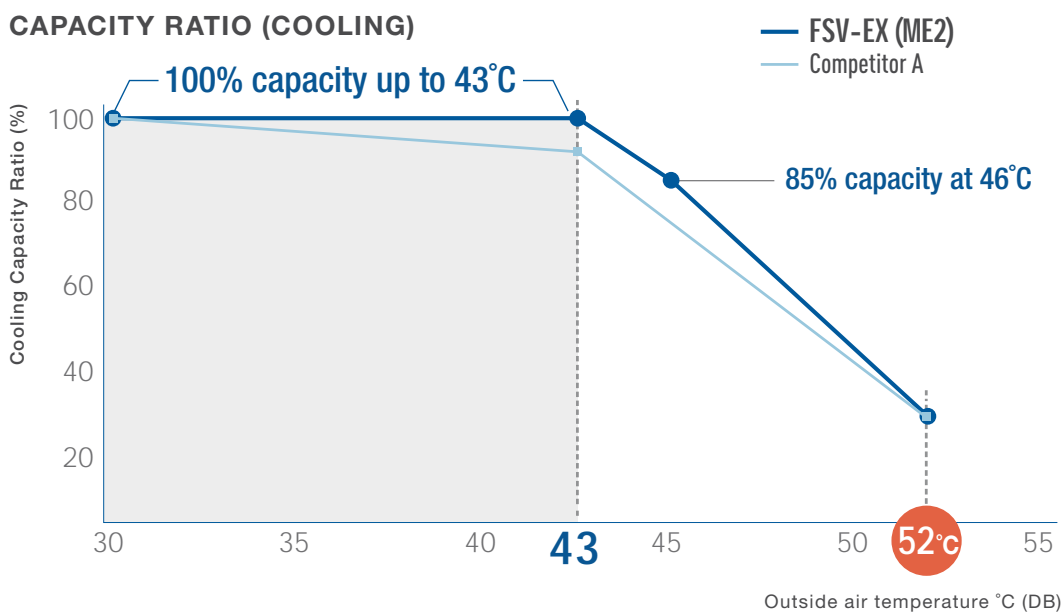

Test Conditions: 33.5kW model, IU/OU capacity ratio: 100%, Indoor Condition: 27°C[DB]/19°C[WB]
Competitor A Specifications are from Technical Data Manual.




Extraordinary Energy-Saving Performance

Designed for Actual Operation Performance

Panasonic builds air conditioning systems not only with a high EER for rated operation, but also with Seasonal-EER appropriate to the customer's actual environment of use. For instance, with rated operation, outdoor temperature is constant at 35°C, but in reality the outdoor temperature is continuously changing. Consequently, required air conditioning performance also changes. That's why Panasonic implements the following kind of proprietary control.

**Rapidly reaches set temperature
→ full-load operation duration minimised**

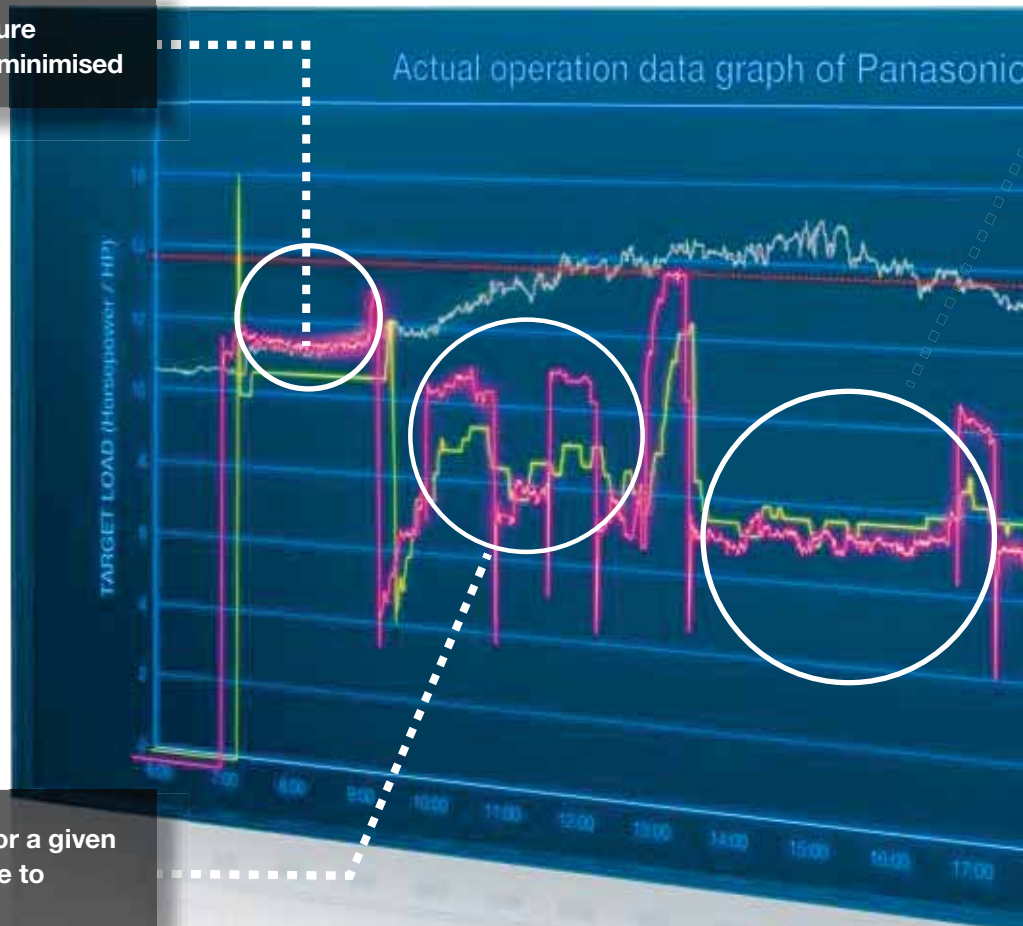

**Load increased as required for a given
outdoor temperature increase to
maintain the set temperature**


Actual performance data of Panasonic FSV installed in Asia

Simulated conditions

Location: Panasonic building in Malaysia System: One 45.0kW outdoor unit, 4 cassette-type indoor units

1. Set temperature is rapidly attained; full-load operating time is kept to a minimum.
2. The frequency of forced oil recovery is minimised. The volume of oil within the compressors is monitored precisely by sensors, so forced oil recovery under full-load operation is conducted only when necessary. Since this suppresses noise due to oil recovery, comfort is maintained.
3. Panasonic pursues a high EER, of course, as well as high EER in part load, for energy saving performance under a broad range of loads.


Panasonic's design concept contributes to substantial energy cost reductions.

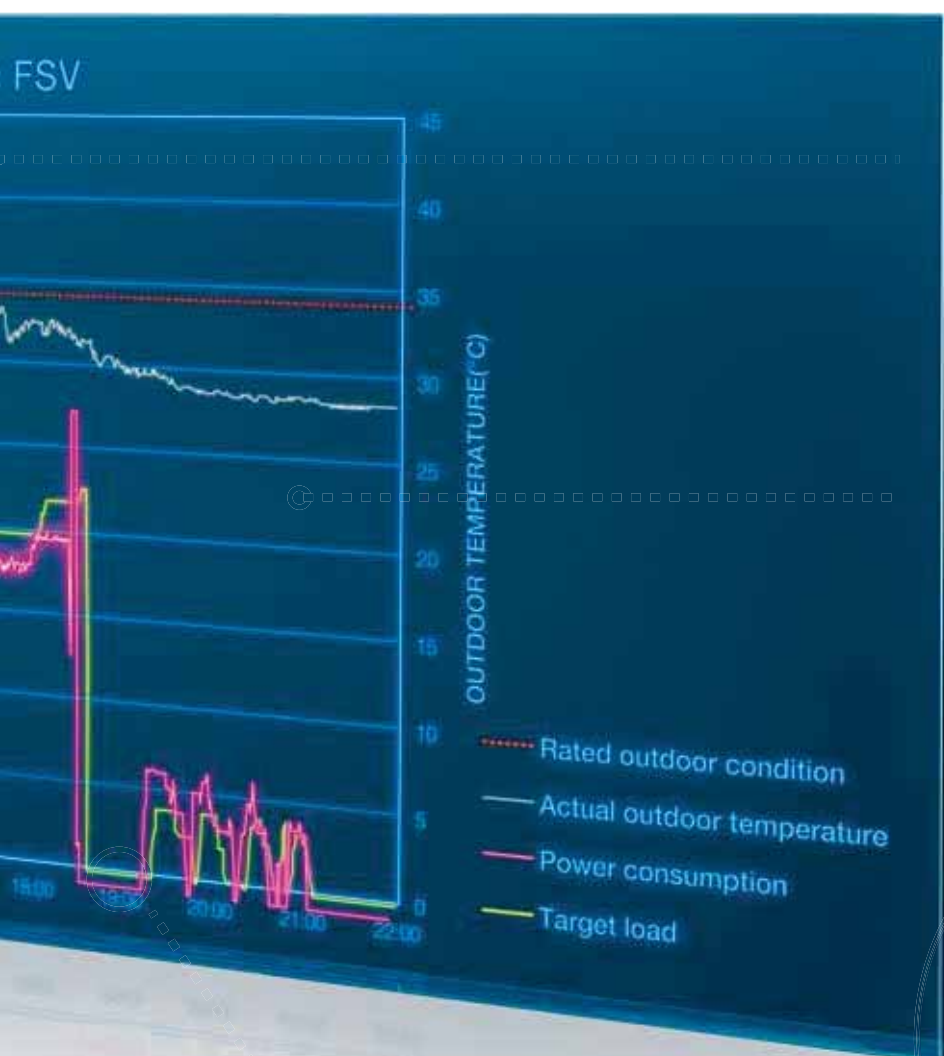

Set temperature maintained with minimum load operation

Thanks to superior oil management, oil recovery is minimised, contributing to reduced energy use and costs

When outdoor temperature drops, operation is immediately stopped

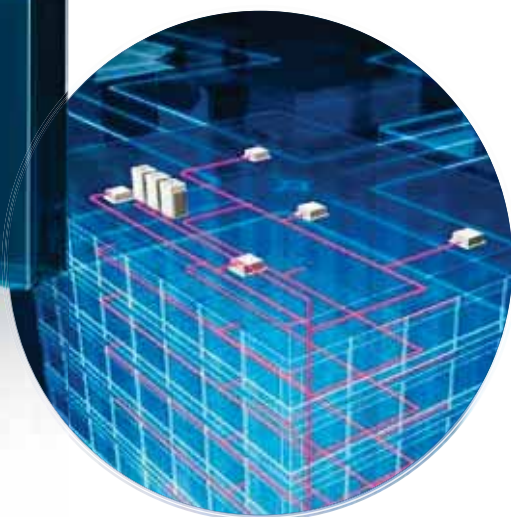

Intelligent 3-stage Oil Management System

In a VRF system, where lengthy piping and a large number of indoor units need to be controlled collectively, the key to maintaining the system's reliability is to ensure an appropriate amount of oil is secured in the compressors. In order to avoid oil shortage in the compressor, maximum operation is normally forcibly conducted at regular intervals to recover oil from indoor units. This method, typically employed in a standard VRF, causes the system to overheat or overcool and thus waste energy.

In Panasonic FSV-EX systems, a sensor for detecting oil levels is mounted in each compressor. In installations with multiple outdoor units, a shortage of oil in one compressor can be compensated for by recovering oil either from another compressor in the same unit, from a compressor in an adjacent outdoor unit, or from a connected indoor unit. Panasonic FSV-EX systems provide users with a comfortable environment whilst saving energy.

The Panasonic system efficiently manages oil recovery in three stages; minimising the frequency of forced oil recovery while reducing energy cost and maintaining comfort.

STAGE-1

Panasonic compressors are equipped with sensors which monitor oil levels precisely at all times. If oil levels fall, oil can be transferred from other compressors within the same outdoor unit.




STAGE-2

If oil levels in all compressors within the outdoor unit fall, oil can be replenished from adjacent outdoor units.



STAGE-3

Forced oil recovery is implemented only if oil levels become insufficient in spite of above measures. The Panasonic system's design concept is radically different from conventional oil systems.

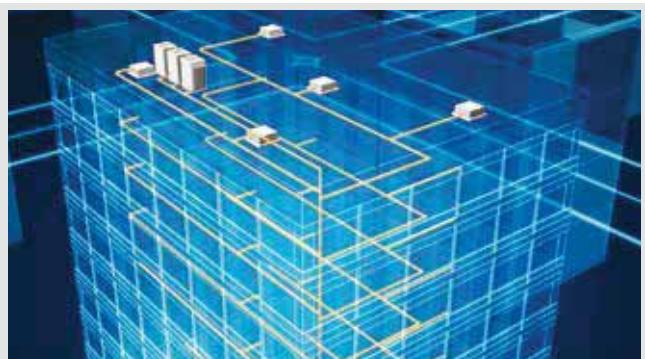


Features of 3-stage oil recovery design

1

Oil sensors installed in each compressor


Oil sensors installed in each Panasonic compressor precisely monitor oil levels, eliminating unnecessary oil recovery.

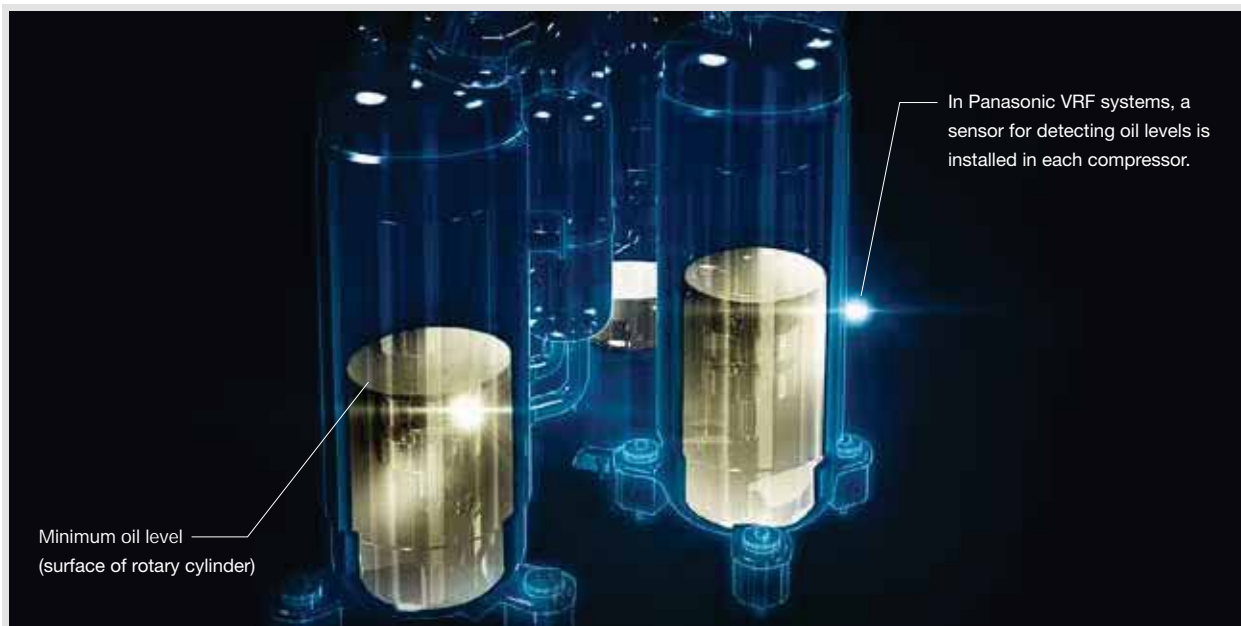


2

Highly functional oil separator

Thanks to extended separate piping, oil recovery efficiency reaches 90%, minimising the oil to be discharged from the compressor.

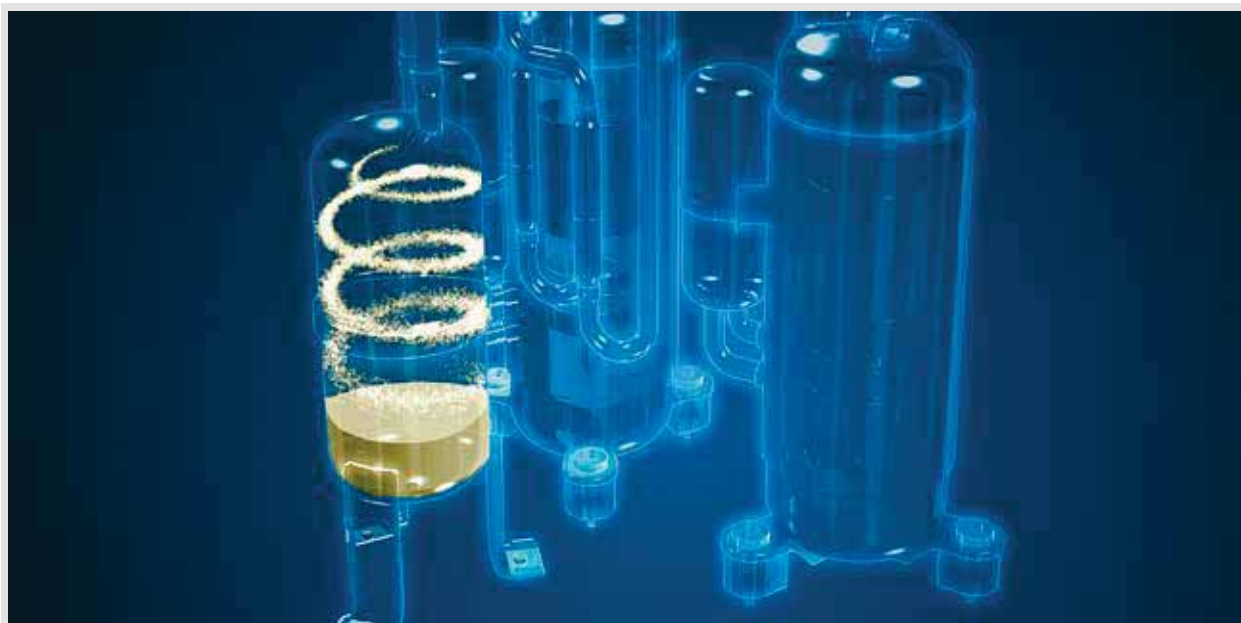

ECONAVI Detects Inefficiencies and Saves Energy

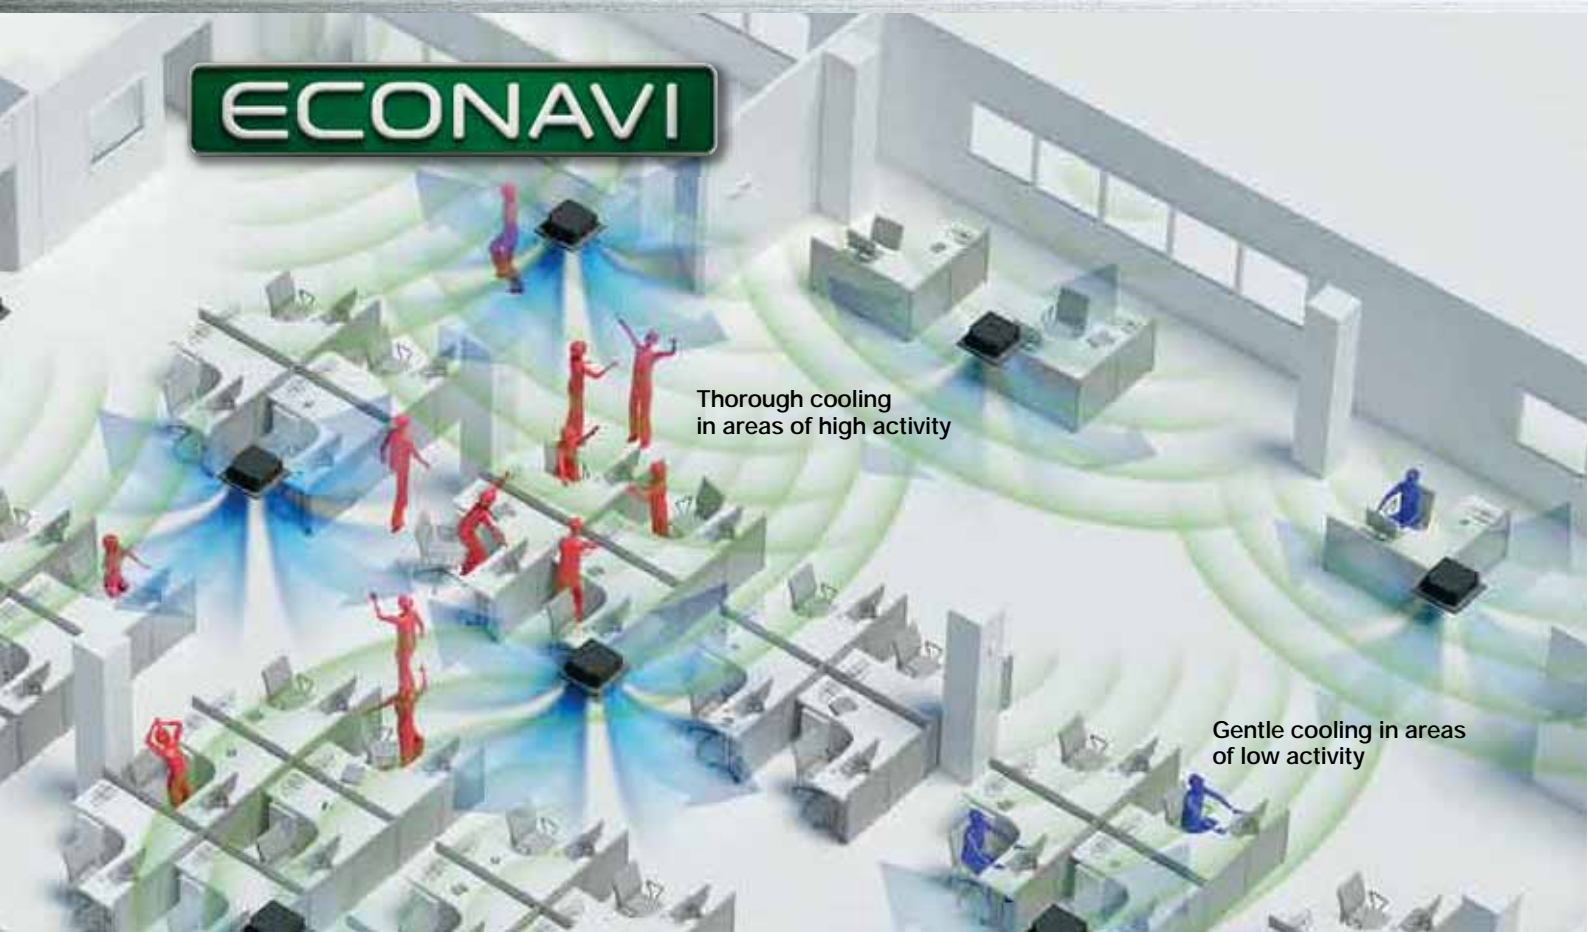

Detection of the level of activity enables precise power saving.

Presence or absence of people at their desks and the level of activity in the office are detected in real time. Set temperature is automatically adjusted to optimise the lower power consumption.



In the morning
Thorough cooling when there is a high level of activity



In the afternoon
Reduced cooling when there are fewer people



At night
Automatic Thermo Off depending on conditions at the end of the day*

Human activity and presence detection

Activity detection

HIGHER ACTIVITY	LOWER ACTIVITY
Cooling Set Temp. +/-0°C	Cooling Set Temp. +1°C
Heating Set Temp. -1°C	Heating Set Temp. +/-0 °C
Every 2 min	Every 2 min

Presence detection

After 20 mins absence	After 3 hours absence
Cooling Set Temp. +2°C	Cooling Thermo OFF*
Heating Set Temp. -2°C	Heating Thermo OFF*
After 3 hours the setting can change to Stop or Temperature Shift	

*Depending on conditions, the setting can change to Switch Off After 3 Hours, Thermo Off or Temperature Shift.


ECONAVI



Remote ECONAVI sensor allows optimum energy operation

Pillars, walls, cabinets and other fittings obstruct the sensor, reducing the area of detection and lowering the energy-saving effect. Taking into consideration blind spots, Panasonic enables the optimum layout for sensors in any office.

Wide detection area

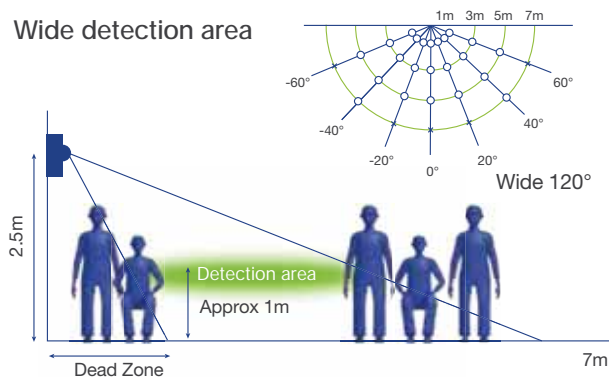

A sensor is remotely set to maximise the detection area.

Installation flexibility ready for indoor unit replacement and layout changes.




ECONAVI sensor CZ-CENSC1

Panasonic enables use with various types of indoor units

Providing outstanding energy-saving performance, Panasonic's FSV Systems can be connected to ECONAVI to detect when energy is being wasted. ECONAVI senses the presence or absence of people and the level of activity in each area of an office. When unnecessary heating or cooling is detected, indoor units are individually controlled to match office conditions for energy-saving operation.

ECONAVI VRF Field Test

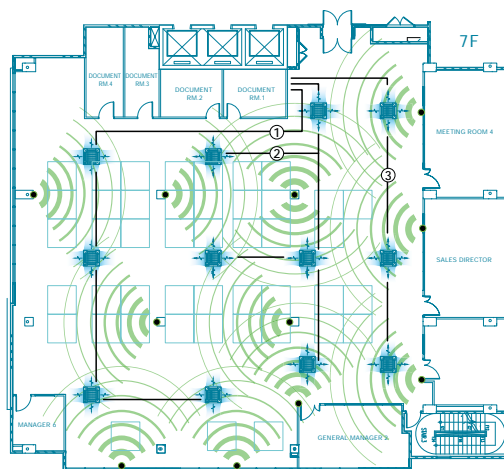

- Indoor units (12)
- Sensors (12)
- Trial term: 11 Apr - 16 May 2014
- Location: Panasonic Malaysia Building
- Office floor: Cooling capacity 112kW
- Testing conditions:
 - Remote controller setting temperature 23°C
 - Setting time AM7:00-PM21:00
- Units used

System	Outdoor unit	Indoor unit
① CU-L7-6	U-20ME1E8	1 S-106MU1E5
		2 S-106MU1E5
		3 S-106MU1E5
		4 S-106MU1E5
② CU-L7-7	U-20ME1E8	5 S-56MU1E5
		6 S-106MU1E5
		7 S-106MU1E5
		8 S-56MU1E5
③ CU-L7-7	U-14ME1E8	9 S-106MU1E5
		10 S-106MU1E5
		11 S-56MU1E5
		12 S-106MU1E5



Panasonic Malaysia Building



Outdoor units on the roof



Sensor installation example

Interior of the office

Power consumption

Without ECONAVI

With ECONAVI

Up to **15%***
energy saving

*Energy-saving effect tested and verified by Field test

Deluxe Wired Remote Controller



Large 3.5" Full-dot LCD with White LED Backlight

Characters and icons are clearly displayed for improved visibility. The display is also large enough to provide a wide range of information for easy confirmation of operation conditions.




Stylish, Easy-to-use Touch Key Design

The elegant, flat design features large touch keys in a simple layout enabling easy, intuitive operation.



Multiple control settings to meet a wide range of air conditioning needs

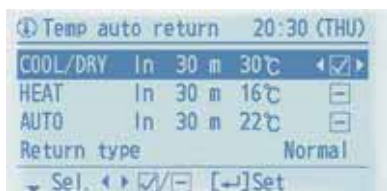


Temperature Auto Return

Even if you change the temperature setting, after a set time it automatically returns to the original temperature setting. You can set temperature auto return time in 10-minute intervals within a period of 4 hours.



Temperature Setting Range


You can set the upper and lower temperature limits. Doing this helps reduce power consumption due to over cooling or heating. Setting is possible in the Cooling, Heating and Dry modes.

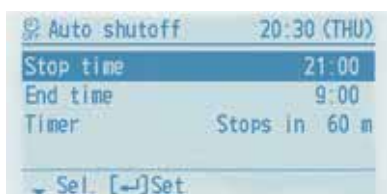

Auto Shutoff

Air conditioning automatically stops after a set time, so you don't have to worry about forgetting to switch the unit off. Even if you manually switch the unit back on after it has stopped, it automatically switches off again after the set time.


Wide range of controls for extra convenience

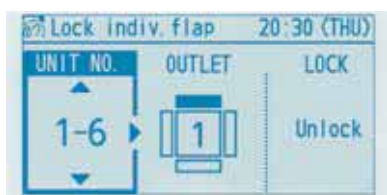

Individual Louvre Control


Lock individual flap (only for 4-way cassette U2 type)

Each of the 4-directional outlets can be selected and locked to provide efficient air distribution that matches the indoor unit layout. Indoor units can be set individually.

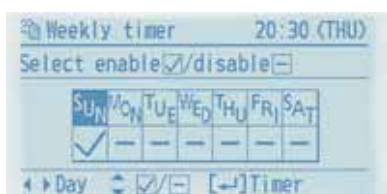

Weekly Timer

This lets you specify 8 Start/Stop times and temperature presets for each day of the week.

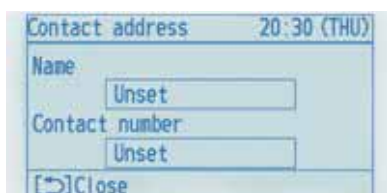

Service Contact Address

Once you have register service contact details, they are automatically displayed if a problem with the air conditioner occurs. This helps you quickly deal with the situation.

Convenient controls



Operation Lock

To prevent operation by anyone other than the supervisor, operation keys can be locked. This prevents unauthorised personnel from changing temperature settings, airflow rate, airflow direction and other settings.



Maintenance Function

Display of outdoor malfunction data, service contact details, filter cleaning remaining time and other data enables at-a-glance verification of maintenance information with the remote controller.




Filter Information

Filter information is indicated for cleaning after a set time of operation period has passed. The number of hours can be adjusted.



Repeat OFF Timer

You can stop the operation after a certain period of time each time operation is performed.



Quiet Operation Mode

There's a Quiet mode that reduces the outdoor unit's operating noise. The mode can be switched On/ Off and Start/ End times can be set.



Setting Lists

Information concerning current settings is displayed in the remote controller's LCD for easy confirmation.




Function List

Control Item		Controllability	
		"A" model	Non"A" model
Menu items	Basic instructions	●	●
	FLAP	●	●
	Individual louvre control (Lock individual flap only for 4-way cassette U1 type)	●	●
	ON/ OFF timer	●	●
	Weekly timer	●	●
	Filter information	●	—
	Outing function	●	●
	Quiet operation mode	●	—
	Energy saving	●	●
	Initial settings	●	●
	Ventilation	●	●
Energy Saving	Temperature auto return	●	●
	Temperature setting range	●	●
	Auto shutoff	●	●
	Schedule peak cut	●	—
	Repeat off timer	●	●
	ECONAVI on/ off	●	—
Maintenance function	Outdoor unit error data	●	—
	Service contact address	●	●
	RC setting mode	●	●
	Test run	●	●
	Sensor information	●	●
	Service check	●	●
	Simple/ detailed settings	●	●
	Auto address	●	●

Design Support Software for FSV



Features the unique Mounting Scheme function providing more thorough spec-in and tender quotation support for easier, faster completion of work.

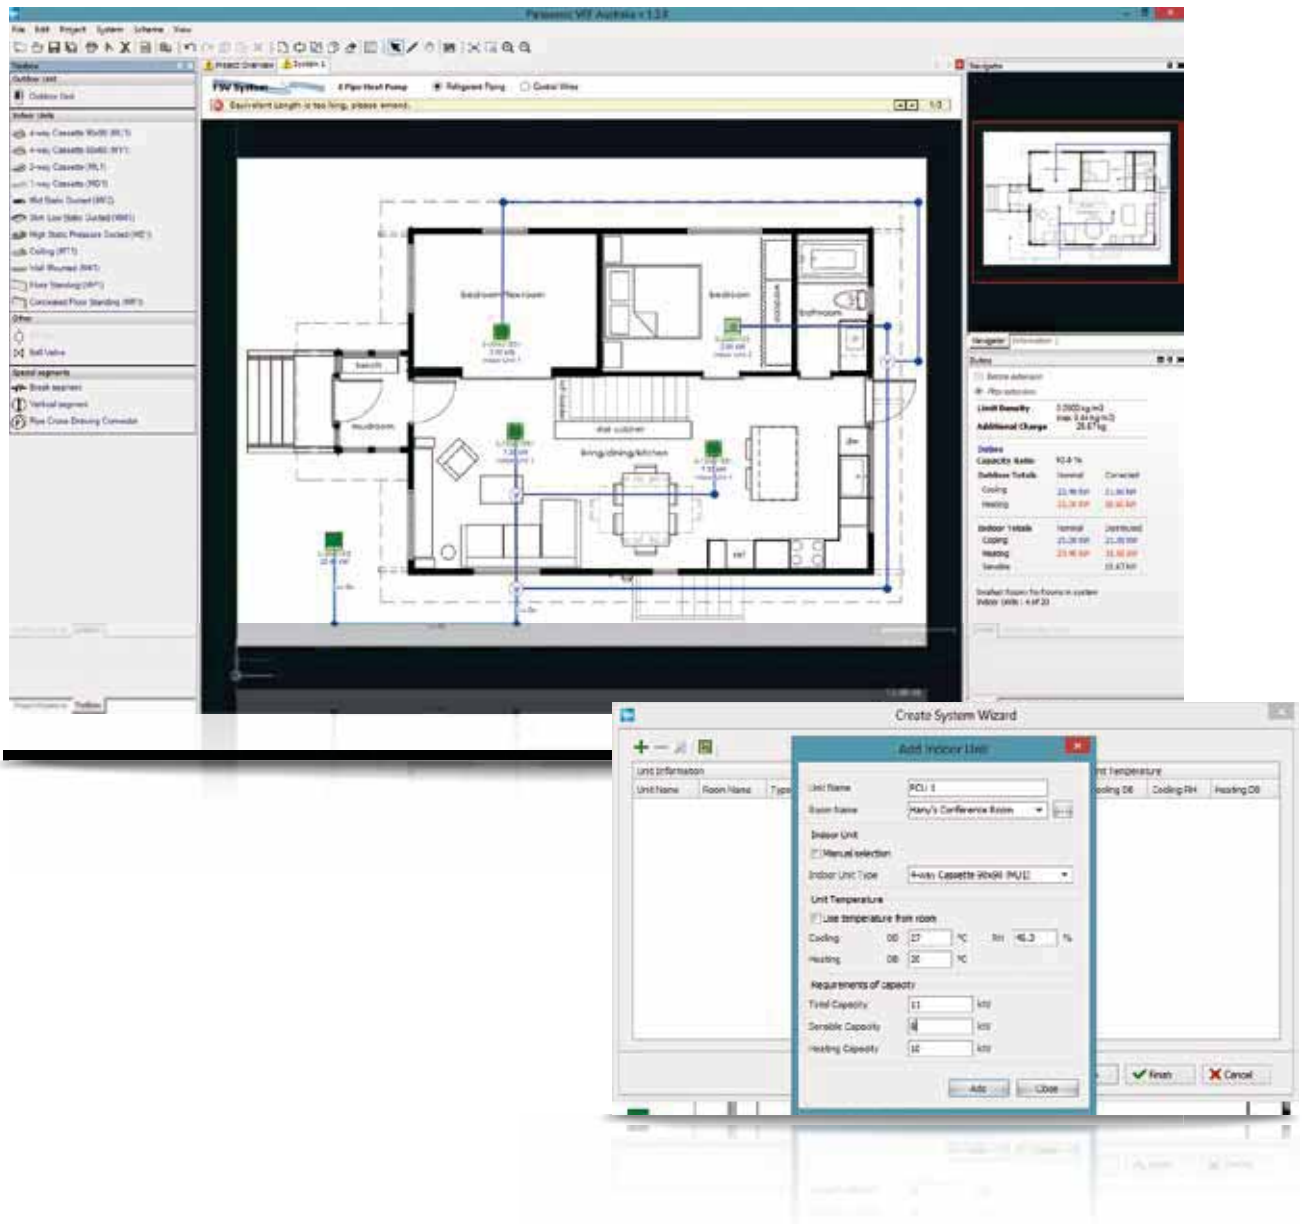

The Panasonic VRF designer software can be used for all Panasonic FSV LE1, LE2, ME2 and MF2

Panasonic has identified the importance of ever-increasing demands for fast and accurate responses to customer requests in our industry. More and more emphasis is being placed upon energy-efficiency in our marketplace. The ability to calculate cooling/heating loads and produce information of actual design conditions is a major advantage to any architect, consultant, contractor or end user. Panasonic understands the time-poor and demanding industry we are in and we are pleased to announce the launch of the next generation of our system design software program.

The Panasonic VRF Designer software has been customised to make the selection and design process as quick and easy as possible.

The design package utilises system wizards and import tools to enable both simple and complex systems to be created. In addition, the system will allow outdoor and indoor units to be dragged on an interactive desktop. This allows users to create everything from realistic floor plans with detailed piping and wiring schematics to send out with quotations, through to installation guidance drawings.



Features include:

- Mounting scheme
- Design selection from building floor drawing
- Any kind of drawing format (dxf, jpg, png, etc)
- Conventional principal scheme
- Easy to use system wizards
- Auto piping and wiring features
- Converted duties for conditions and pipework
- Auto(CAD) [dxf], Excel and PDF export
- Detailed wiring and pipework diagrams
- Automatic price quotation
- Automatic tender document assist

FSV Systems

FSV systems are designed for energy savings, high efficiency, and high durability with strong cooling power even operating at high ambient temperature.

Panasonic continuously applies advanced technologies to meet the requirements of diverse situations and contribute to the creation of comfortable living spaces.



2-PIPE FSV-EX ME2 Series

Extraordinary energy-saving performance and powerful operation

Space-saving Combination Model

Cooling or
Heating Type

Anti-Corrosion
Model

- Wide range of systems from 22.4kW to 224.0kW
- Class-leading EER of 4.7 (for 22.4kW model)
- Industry-leading low noise of 54dB (22.4kW model)
- Cooling operation possible with outdoor temperature as high as 52°C (DB)
- Long maximum pipe length (up to 1,000m)
- Up to 64 indoor units connectable
- External static pressure up to 80Pa
- Extended operating range allows heating with outdoor temperatures as low as -25°C (WB)
- Suitable for R22 renewal projects*

*Refer to Technical Document for further details



High Efficiency Combination Model

Cooling or
Heating Type

Anti-Corrosion
Model

- Wide range of systems from 22.4kW to 180.0kW
- Higher EER than the Space-saving Combination Model (Please refer to pages 34-35 for details).





3-PIPE FSV MF2 Series

For simultaneous heating and cooling operation

Cooling and Heating
Simultaneous Type

Anti-Corrosion
Model

- Wide range of systems from 22.4kW to 118.0kW
- Top class EER: 3.94 / COP: 4.49 (in the case of 22.4kW)
- Longer max piping length (up to 500m)
- Increased max number of connectable indoor units (up to 52)
- External static pressure up to 80Pa
- Cooling operation is possible when outdoor temperature as high as 46°C DB
- Extended operating range to provide heating at outdoor temperature as low as -20°C WB
- Suitable for R22 renewal projects*

*Refer to Technical Document for further details



Heat
Recovery
Type



2-PIPE MINI-FSV LE1/ LE2 Series

For small-scale commercial and residential use

Cooling or Heating Type 1 phase*¹
Cooling or Heating Type 3-phase*²

Anti-Corrosion
Model*³

- Wide range of systems from 12.1kW to 25.0kW
- High external static pressure up to 35Pa (LE2, 22.4 & 25.0kW only)
- Top-class EER: 4.50 / COP: 5.19 (12.1kW LE2 only)
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C DB
- Maximum number of connectable indoor units: 13 (22.4 / 25.0kW only)
- Actual piping length: 120m (12.1 / 14.0 / 15.5kW LE1 only) / 150m (LE2, 22.4 & 25.0kW only)
- Max. piping length: 150m (12.1 / 14.0 / 15.5kW LE1 only) / 180m (LE2 only) / 300m (22.4 & 25.0kW only)
- Suitable for R22 renewal projects*

*Refer to Technical Document for further details



Industry
Top Class
EER/COP

*¹ LE2 only

*² 12.1 / 14.0 / 15.5 / 22.4 / 25.0kW LE1 only

*³ LE2, 22.4 / 25.0kW only

2-PIPE FSV-EX ME2

Cooling or Heating Type

Remarkable improvement on key components





Extraordinary energy-saving performance

1 Multiple large-capacity all inverter compressors (more than 40.0kW)

Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.



2 Enlarged heat exchanger surface area with triple surface*

The new heat exchanger features a triple-surface construction. Compared to the divided dual-surface construction in current models, there is no division of space and the area for heat exchange is larger. Also, highly efficient piping pattern increases heat exchange performance by 5%.

* For 22.4kW and 28.0kW unit, the heat exchanger is 2 row design.



Conventional model [ME1]




New model [ME2]

Redesigned for smooth improved air discharge

3 Newly designed curved air discharge bell mouth for better aerodynamics

The new curved shape with integrated top and bottom assure smooth exhaust flow. This gives more air-volume with same sound level, less power input at same air-volume.



Conventional model [ME1]



New model [ME2]

4 Large air discharge area with new flush surface top panel

To reduce air resistance, instead of a tubular fan design, a new large flat fan guard design, flush with the top panel, is employed. This design lead to the improvements in air resistance, but also contributed to better appearance designing.



Conventional model [ME1]



New model [ME2]

High-efficiency & Space-saving VRF system

2-PIPE FSV-EX ME2

A large number of indoor units can be connected

Up to 64 indoor units can be connected in a single system for ultimate design flexibility.

*Maximum number of indoor units depends on outdoor unit capacity.

Up to 64 Indoor Units Connectable*



Increased piping length for greater design flexibility


Adaptable to various building types and sizes

Actual piping length : 200m

Max piping length : 1,000m

*1: 40 m if the outdoor unit is below the indoor unit.

Max. total length: 1,000m

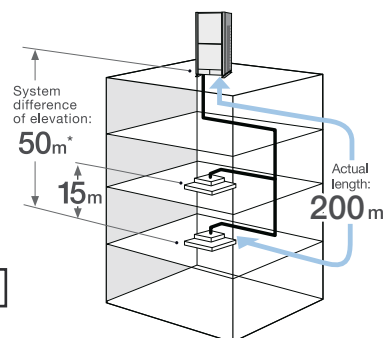

Connectable indoor/outdoor unit capacity ratio up to 130%*

FSV systems attain maximum indoor unit connection capacity of up to 130%* of the unit's connection range, depending on the outdoor and indoor models selected. So for a reasonable investment, FSV systems provide an ideal air conditioning solution for locations where full cooling/heating are not always required.

SYSTEM / kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0
MNcIU : 130%	13	16	19	23	26	29	33	36	40	43	46	50	53	56	59	63	64	64	64
SYSTEM / kW	130.0	135.0	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	185.0	190.0	196.0	202.0	208.0	213.0	219.0	224.0	
MNcIU : 130%	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	

MNcIU : Maximum Number of Connectable Indoor Unit

Note: If more than 100% indoor units are operated with a high load, the units may not perform at the rated capacity.


For the details, please consult with an authorised Panasonic dealer

* If the following conditions are satisfied, the effective range is above 130% up to 200%.

- i) Obey the limited number of connectable indoor units.
- ii) The lower limit of operating range for heating outdoor temperature is limited to -10°CWB (standard -25°CWB).
- iii) Simultaneous operation is limited to less than 130% of connectable indoor units.

Excellent energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, and new heat exchanger design.

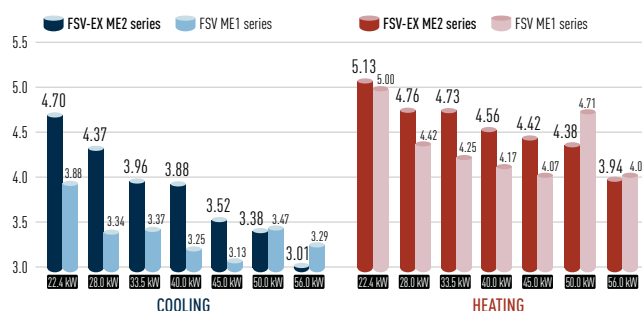




Up to 50m length difference between the longest and the shortest piping from the first branch

Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools and hospitals.


- Up to 64 units can be connected to one system.
- Difference between maximum and minimum pipe runs after first branch can be a maximum of 50m.
- Larger pipe runs can be up to 200m.

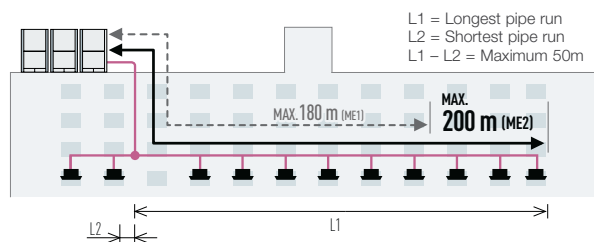

Extended operating range


Cooling operation range:

-10°C DB to +52°C DB

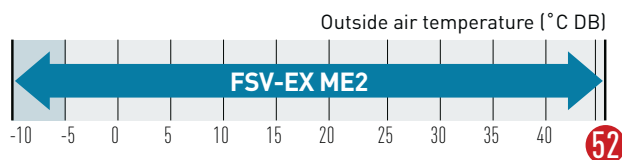

Heating operation range:


Extended heating operation range enables heating even when the outdoor temperature is as low as -25°C. Using a wired remote control, indoor heating temperature range can be set from 16°C to 30°C*.

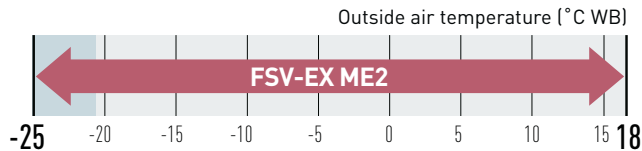

* Depending on the type of remote controller.

Compact design


The new ME2 series has reduced the installation space required with up to 56.0kW available in a single chassis. 22.4kW - 28.0kW are able to fit inside a lift for easy handling on site.

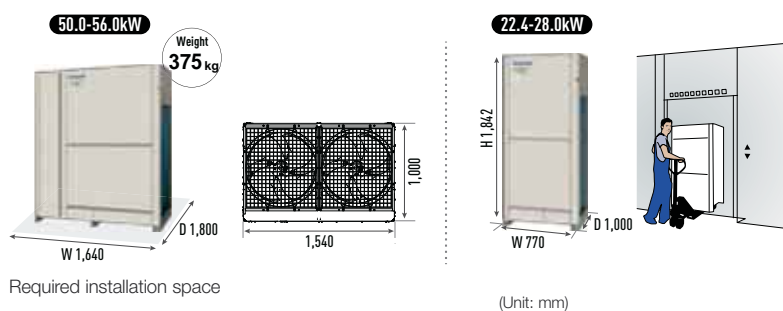

Newly designed fan


Optimised air flow

Newly designed fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



High-efficiency & Space-saving VRF system


2-PIPE FSV-EX ME2

High external static pressure on condensers


With a newly designed fan, fan guard, motor, and casing, new models can be custom-installed on-site to provide up to 80Pa of external static pressure. An air discharge duct prevents shortages of air circulation, allowing outdoor units to be installed on every floor of a building.



Fan




Fan Motor and Casing

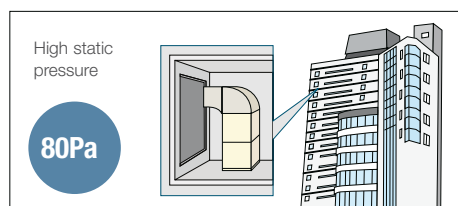

Extended compressor life by uniform compressor operation time

The total run-time of compressors is monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.

Compressors with histories showing shorter run-times are selected first, ensuring equal wear and tear across all units and extending the working life of the system.

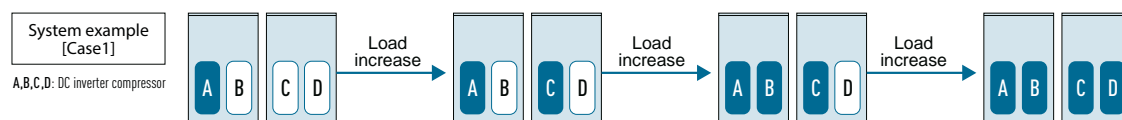

* Depends on accumulated operation time of each compressor.

* Compressor priority has possibility to be changed.

(e.g) Case1: A→C→B→D, Case2: C→A→D→B, Case3: A→C→D→B, Case4: C→A→B→D

Automatic backup operation in the case of compressor failure or outdoor unit malfunction

Except for 22.4kW, 28.0kW & 33.5kW single unit installation

*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service.
Users should contact their authorised service centre as soon as fault occurs.

Even if a whole outdoor unit fails



The other outdoor unit can keep running

Even if a compressor in a single system fails



The other compressor can keep running

Automatic backup operation.




Demand response

Featuring inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.

Demand control terminal is available to control 0-50-75-100% of capacities.

ME1 series features a DR terminal as standard (not a required option).

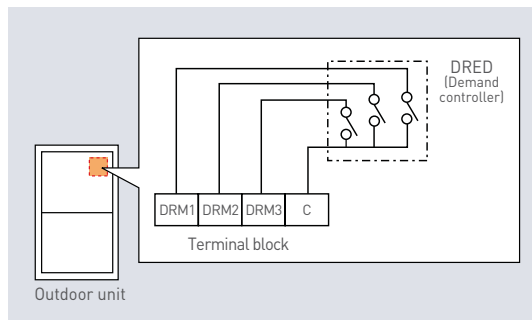


Demand Response Signal	Power Input
DRM 1	0%
DRM 2	50%
DRM 3	75%

Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible at 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been finalised to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

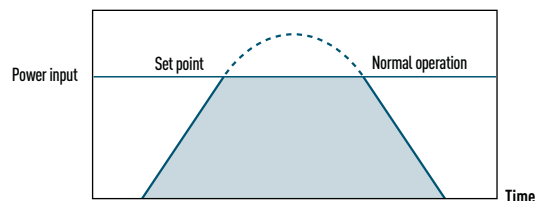


	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	

Anti-corrosion outdoor unit



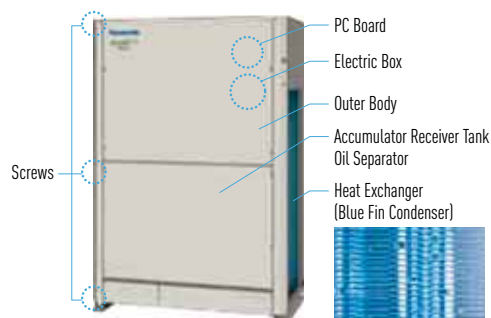


Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.







Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.



2-PIPE FSV-EX ME2 Series

HIGH EFFICIENCY COMBINATION MODEL

Appearance												
kW			22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
Model name			U-8ME2R8	U-10ME2R8	U-12ME2R8	U-14ME2R8	U-16ME2R8	U-8ME2R8 U-10ME2R8	U-10ME2R8 U-10ME2R8	U-10ME2R8 U-12ME2R8	U-12ME2R8 U-12ME2R8	
Power supply			400V/415V/3-phase/50Hz									
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
		BTU/h	76,500	95,600	114,300	136,500	153,500	170,600	191,100	209,900	232,100	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	76.5	
		BTU/h	85,300	107,500	128,000	153,600	170,600	191,100	215,000	235,500	261,100	
EER / COP	Cooling	W/W	4.70	4.37	3.96	3.88	3.52	4.55	4.38	4.13	3.93	
	Heating	W/W	5.13	4.76	4.73	4.56	4.42	4.96	4.77	4.76	4.69	
Dimensions	H x W x D	mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,600 x 1,000	1,842 x 1,600 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	
Net weight		kg	220	220	270	315	315	440	440	490	540	
Electrical ratings	Cooling	Running current A	7.40 / 7.14	10.2 / 9.80	13.0 / 12.5	16.5 / 15.9	20.1 / 19.4	17.3 / 16.6	20.3 / 19.6	23.1 / 22.3	26.6 / 25.6	
		Power input kW	4.77	6.41	8.47	10.3	12.8	11.0	12.8	14.9	17.3	
	Heating	Running current A	7.56 / 7.29	10.5 / 10.1	12.3 / 11.9	15.8 / 15.2	17.9 / 17.3	17.7 / 17.1	20.9 / 20.2	22.7 / 21.9	25.3 / 24.4	
		Power input kW	4.87	6.62	7.92	9.86	11.3	11.3	13.2	14.5	16.3	
Starting current		A	1	1	1	2	2	2	2	2	2	
Air flow rate	m³/h		13,440	13,440	13,920	13,920	13,920	26,880	26,880	27,360	27,840	
	L/s		3,733	3,733	3,866	3,866	3,866	7,466	7,466	7,600	7,733	
Refrigerant amount at shipment		kg	11.1	11.1	11.3	11.3	11.3	22.2	22.2	22.4	22.6	
External static pressure		Pa	80	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)									
Sound pressure level	Normal mode	dB (A)	54.0	56.0	59.0	60.0	61.0	58.5	59.0	61.0	62.0	
	Silent mode (2)	dB (A)	49.0	51.0	54.0	55.0	56.0	53.5	54.0	56.0	57.0	
Sound power level		Normal mode	dB	75.0	77.0	80.0	81.0	82.0	79.5	80.0	82.0	83.0

Appearance											
kW			140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	
Model name			U-10ME2R8 U-12ME2R8 U-12ME2R8 U-16ME2R8	U-12ME2R8 U-12ME2R8 U-12ME2R8 U-16ME2R8	U-10ME2R8 U-12ME2R8 U-16ME2R8 U-16ME2R8	U-12ME2R8 U-12ME2R8 U-16ME2R8 U-16ME2R8	U-10ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	U-12ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	U-14ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	
Power supply			400V/415V/3-phase/50Hz								
Capacity	Cooling	kW	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	
		BTU/h	477,800	494,900	515,400	532,400	552,900	573,400	593,600	614,160	
	Heating	kW	155.0	160.0	169.0	175.0	182.0	189.0	195.0	201.0	
		BTU/h	529,000	546,100	576,800	597,300	621,200	645,100	665,300	686,000	
EER / COP	Cooling	W/W	3.87	3.82	3.75	3.71	3.65	3.60	3.60	3.52	
	Heating	W/W	4.65	4.66	4.56	4.56	4.47	4.47	4.45	4.42	
Dimensions	H x W x D	mm	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	
Net weight		kg	1,075	1,125	1,120	1,170	1,165	1,215	1,260	1,260	
Electrical ratings	Cooling	Running current	A	56.2 / 54.2	59.0 / 56.8	63.2 / 60.9	65.3 / 63.0	69.7 / 67.1	73.3 / 70.6	75.8 / 73.0	80.3 / 77.4
		Power input	kW	36.2	38.0	40.3	42.1	44.4	46.7	48.3	51.2
	Heating	Running current	A	52.2 / 50.4	53.8 / 51.9	58.8 / 56.7	60.2 / 58.1	64.6 / 62.2	67.1 / 64.7	69.5 / 67.0	72.2 / 69.6
		Power input	kW	33.3	34.3	37.1	38.4	40.7	42.3	43.8	45.5
Starting current		A	5	5	6	6	7	7	8	8	
Air flow rate		m³/h	55,200	55,680	55,200	55,680	55,200	55,680	55,680	55,680	
		L/s	15,333	15,466	15,333	15,466	15,333	15,466	15,466	15,466	
Refrigerant amount at shipment		kg	45.0	45.2	45.0	45.2	45.0	45.2	45.2	45.2	
External static pressure		Pa	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm (inches)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	
	Liquid pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB), Heating: -25°C (WB)~ +18°C (WB)								
Sound pressure level	Normal mode	dB (A)	65.5	66.0	66.0	66.5	66.5	67.0	67.0	67.0	
	Silent mode (2)	dB (A)	60.5	61.0	61.0	61.5	61.5	62.0	62.0	62.0	
Sound power level		Normal mode	dB	86.5	87.0	87.0	87.5	87.5	88.0	88.0	



U-8ME2R8
U-10ME2R8



U-12ME2R8
U-14ME2R8
U-16ME2R8

73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
U-10ME2R8 U-16ME2R8	U-12ME2R8 U-16ME2R8	U-14ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8	U-10ME2R8 U-12ME2R8 U-12ME2R8	U-12ME2R8 U-12ME2R8 U-12ME2R8	U-10ME2R8 U-12ME2R8 U-16ME2R8	U-12ME2R8 U-12ME2R8 U-16ME2R8	U-10ME2R8 U-16ME2R8 U-16ME2R8	U-12ME2R8 U-16ME2R8 U-16ME2R8	U-14ME2R8 U-16ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8 U-16ME2R8
400V/415V/3-phase/50Hz											
73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800
81.5	87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0
278,200	298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500	471,000	494,900	511,900
3.80	3.69	3.68	3.52	4.05	3.95	3.84	3.75	3.69	3.62	3.62	3.52
4.55	4.56	4.48	4.42	4.72	4.73	4.61	4.57	4.49	4.50	4.46	4.42
1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000
535	585	630	630	760	810	805	855	850	900	945	945
30.1 / 29.0	33.1 / 31.9	36.6 / 35.3	40.2 / 38.7	36.8 / 35.5	39.3 / 37.9	43.8 / 42.2	46.7 / 45.0	50.2 / 48.4	53.2 / 51.3	56.9 / 54.9	60.2 / 58.1
19.2	21.3	23.1	25.6	23.7	25.6	27.9	30.1	32.0	34.3	35.9	38.4
28.4 / 27.4	30.1 / 29.0	33.6 / 32.4	35.8 / 34.6	35.9 / 34.6	37.1 / 35.8	40.5 / 39.0	43.6 / 42.0	46.6 / 44.9	48.2 / 46.4	51.5 / 49.7	53.8 / 51.8
17.9	19.2	21.2	22.6	22.9	23.9	25.8	27.8	29.4	30.7	32.5	33.9
3	3	4	4	3	3	4	4	5	5	6	6
27,360	27,840	27,840	27,840	41,280	41,760	41,280	41,760	41,280	41,760	41,760	41,760
7,600	7,733	7,733	7,733	11,466	11,600	11,466	11,600	11,466	11,600	11,600	11,600
22.4	22.6	22.6	22.6	33.7	33.9	33.7	33.9	33.7	33.9	33.9	33.9
80	80	80	80	80	80	80	80	80	80	80	80
Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)											
62.5	63.5	63.5	64.0	63.0	64.0	64.0	64.5	65.0	65.5	65.5	66.0
57.5	58.5	58.5	59.0	58.0	59.0	59.0	59.5	60.0	60.5	60.5	61.0
83.5	84.5	84.5	85.0	84.0	85.0	85.0	85.5	86.0	86.5	86.5	87.0

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB


These specifications are subject to change without notice.

22.4kW /28.0kW


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

- A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing tube downward
C: (Installation hole pitch)

Top view



Front view

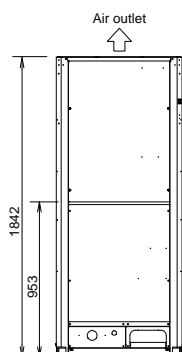


unit: mm

33.5kW /40.0kW /45.0kW


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

- A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing tube downward
C: (Installation hole pitch)

Top view





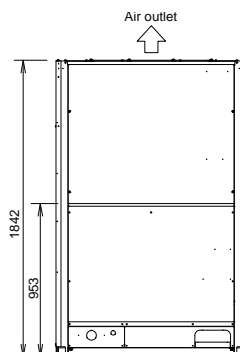


Front view










unit: mm

2-PIPE FSV-EX ME2 Series

SPACE SAVING COMBINATION MODEL

Appearance												
kW			22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
Model name			U-8ME2R8	U-10ME2R8	U-12ME2R8	U-14ME2R8	U-16ME2R8	U-18ME2R8	U-20ME2R8	U-10ME2R8 U-12ME2R8	U-12ME2R8 U-12ME2R8	
Power supply			400V/415V/3-phase/50Hz									
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
		BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	76.5	
		BTU/h	85,300	107,500	128,000	153,600	170,600	191,100	215,000	235,500	261,100	
EER / COP	Cooling	W/W	4.70	4.37	3.96	3.88	3.52	3.38	3.01	4.13	3.93	
	Heating	W/W	5.13	4.76	4.73	4.56	4.42	4.38	3.94	4.76	4.69	
Dimensions	H x W x D	mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,540 x 1,000	1,842 x 1,540 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	
Net weight		kg	220	220	270	315	315	375	375	490	540	
Electrical ratings	Cooling	Running current A	7.40 / 7.14	10.2 / 9.80	13.0 / 12.5	16.5 / 15.9	20.1 / 19.4	23.0 / 22.1	28.3 / 27.2	23.1 / 22.3	26.6 / 25.6	
		Power input kW	4.77	6.41	8.47	10.3	12.8	14.8	18.6	14.9	17.3	
	Heating	Running current A	7.56 / 7.29	10.5 / 10.1	12.3 / 11.9	15.8 / 15.2	17.9 / 17.3	20.1 / 19.4	24.6 / 23.7	22.7 / 21.9	25.3 / 24.4	
		Power input kW	4.87	6.62	7.92	9.86	11.3	12.8	16.0	14.5	16.3	
Starting current		A	1	1	1	2	2	2	2	2	2	
Air flow rate		m³/h	13,440	13,440	13,920	13,920	13,920	24,300	24,300	27,360	27,840	
		L/s	3,733	3,733	3,866	3,866	3,866	6,750	6,750	7,600	7,733	
Refrigerant amount at shipment		kg	11.1	11.1	11.3	11.3	11.3	11.0	11.0	22.4	22.6	
External static pressure		Pa	80	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)									
Sound pressure level	Normal mode	dB (A)	54.0	56.0	59.0	60.0	61.0	59.0	60.0	61.0	62.0	
	Silent mode (2)	dB (A)	49.0	51.0	54.0	55.0	56.0	54.0	55.0	56.0	57.0	
Sound power level		dB	75.0	77.0	80.0	81.0	82.0	80.0	81.0	82.0	83.0	

Appearance																
kW			140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	185.0					
Model name			U-14ME2R8 U-16ME2R8 U-20ME2R8	U-16ME2R8 U-16ME2R8 U-20ME2R8	U-14ME2R8 U-20ME2R8 U-20ME2R8	U-16ME2R8 U-20ME2R8 U-20ME2R8	U-18ME2R8 U-20ME2R8 U-20ME2R8	U-20ME2R8 U-20ME2R8 U-20ME2R8	U-14ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8 U-16ME2R8 U-16ME2R8	U-10ME2R8 U-16ME2R8 U-20ME2R8 U-20ME2R8					
Power supply			400/415V/3-phase/50Hz													
Capacity	Cooling	kW	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	185.0					
		BTU/h	477,800	494,900	515,400	532,400	552,900	573,400	593,700	614,200	631,200					
	Heating	kW	155.0	160.0	169.0	175.0	182.0	189.0	195.0	201.0	207.0					
		BTU/h	529,000	546,100	576,800	597,300	621,200	645,100	665,300	686,000	706,300					
EER / COP	Cooling	W/W	3.39	3.32	3.21	3.15	3.12	3.01	3.60	3.52	3.28					
	Heating	W/W	4.29	4.27	4.11	4.08	4.06	3.94	4.45	4.42	4.16					
Dimensions	H x W x D	mm	1,842 x 4,020 x 1,000	1,842 x 4,020 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,740 x 1,000	1,842 x 4,740 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	1,842 x 5,210 x 1,000					
Net weight		kg	1,005	1,005	1,065	1,065	1,125	1,125	1,260	1,260	1,285					
Electrical ratings	Cooling	Running current A	64.1 / 61.8	67.8 / 65.4	72.2 / 69.6	76.0 / 73.3	79.8 / 77.0	84.8 / 81.7	75.8 / 73.0	80.3 / 77.4	86.6 / 83.5					
		Power input kW	41.3	43.7	47.0	49.5	52.0	55.8	48.3	51.2	56.4					
	Heating	Running current A	56.6 / 54.6	58.8 / 56.7	63.8 / 61.5	66.6 / 64.2	69.5 / 67.0	73.7 / 71.0	69.5 / 67.0	72.2 / 69.6	77.1 / 74.3					
		Power input kW	36.1	37.5	41.1	42.9	44.8	48.0	43.8	45.5	49.7					
Starting current		A	6	6	6	6	6	6	8	8	7					
Air flow rate		m³/h	52,140	52,140	62,520	62,520	72,900	72,900	55,680	55,680	75,960					
		L/s	14,483	14,483	17,366	17,366	20,250	20,250	15,466	15,466	21,100					
Refrigerant amount at shipment		kg	33.6	33.6	33.3	33.3	33.0	33.0	45.2	45.2	44.4					
External static pressure		Pa	80	80	80	80	80	80	80	80	80					
Piping connections	Gas pipe	mm (inches)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)					
	Liquid pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)					
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)					
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)													
Sound pressure level	Normal mode	dB (A)	65.5	65.5	65.0	65.5	64.5	65.0	67.0	67.0	66.0					
	Silent mode (2)	dB (A)	60.5	60.5	60.0	60.5	59.5	60.0	62.0	62.0	61.0					
Sound power level	Normal mode	dB	86.5	86.5	86.0	86.5	85.5	86.0	88.0	88.0	87.0					



U-8ME2R8
U-10ME2R8



U-12ME2R8
U-14ME2R8
U-16ME2R8



U-18ME2R8
U-20ME2R8

73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
U-10ME2R8 U-16ME2R8	U-12ME2R8 U-16ME2R8	U-14ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8	U-14ME2R8 U-20ME2R8	U-16ME2R8 U-20ME2R8	U-18ME2R8 U-20ME2R8	U-20ME2R8 U-20ME2R8	U-10ME2R8 U-16ME2R8 U-16ME2R8	U-12ME2R8 U-16ME2R8 U-16ME2R8	U-14ME2R8 U-16ME2R8 U-16ME2R8	U-16ME2R8 U-16ME2R8 U-16ME2R8

400V/415V/3-phase/50Hz

73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800
81.5	87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0
278,200	298,600	324,200	341,300	368,600	385,700	406,100	433,300	450,500	471,000	494,900	511,900
3.80	3.69	3.68	3.52	3.32	3.22	3.16	3.00	3.69	3.62	3.62	3.52
4.55	4.56	4.48	4.42	4.17	4.14	4.13	3.92	4.49	4.50	4.46	4.42
1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,780 x 1,000	1,842 x 2,780 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000
535	585	630	630	690	690	750	750	850	900	945	945
30.1 / 29.0	33.1 / 31.9	36.6 / 35.3	40.2 / 38.7	44.9 / 43.2	48.2 / 46.5	52.1 / 50.2	57.3 / 55.2	50.2 / 48.4	53.2 / 51.3	56.9 / 54.9	60.2 / 58.1
19.2	21.3	23.1	25.6	28.9	31.4	33.9	37.7	32.0	34.3	35.9	38.4
28.4 / 27.4	30.1 / 29.0	33.6 / 32.4	35.8 / 34.6	40.6 / 39.2	42.4 / 40.8	44.7 / 43.1	49.8 / 48.0	46.6 / 44.9	48.2 / 46.4	51.5 / 49.7	53.8 / 51.8
17.9	19.2	21.2	22.6	25.9	27.3	28.8	32.4	29.4	30.7	32.5	33.9
3	3	4	4	4	4	4	4	5	5	6	6
27,360	27,840	27,840	27,840	38,220	38,220	48,600	48,600	41,280	41,760	41,760	41,760
7,600	7,733	7,733	7,733	10,616	10,616	13,500	13,500	11,466	11,600	11,600	11,600
22.4	22.6	22.6	22.6	22.3	22.3	22.0	22.0	33.7	33.9	33.9	33.9
80	80	80	80	80	80	80	80	80	80	80	80
Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)

Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)

62.5	63.5	63.5	64.0	63.0	63.5	62.5	63.0	65.0	65.5	65.5	66.0
57.5	58.5	58.5	59.0	58.0	58.5	57.5	58.0	60.0	60.5	60.5	61.0
83.5	84.5	84.5	85.0	84.0	84.5	83.5	84.0	86.0	86.5	86.5	87.0

GLOBALREMARKS

Rated conditions:	Cooling	Heating
Indoor air temperature	27°C DB / 19°C WB	20°C DB
Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.

190.0	196.0	202.0	208.0	213.0	219.0	224.0
U-12ME2R8 U-16ME2R8 U-20ME2R8 U-20ME2R8	U-10ME2R8 U-20ME2R8 U-20ME2R8 U-20ME2R8	U-16ME2R8 U-16ME2R8 U-20ME2R8 U-20ME2R8	U-16ME2R8 U-18ME2R8 U-20ME2R8 U-20ME2R8	U-16ME2R8 U-20ME2R8 U-20ME2R8 U-20ME2R8	U-18ME2R8 U-20ME2R8 U-20ME2R8 U-20ME2R8	U-20ME2R8 U-20ME2R8 U-20ME2R8 U-20ME2R8

400/415V/3-phase/50Hz

190.0	196.0	202.0	208.0	213.0	219.0	224.0
648,300	668,800	689,200	709,700	727,000	747,200	764,300
213.0	219.0	226.0	233.0	239.0	245.0	252.0
726,800	747,200	771,100	795,000	815,500	836,000	860,100
3.26	3.15	3.22	3.19	3.10	3.08	3.01
4.18	4.05	4.14	4.12	4.03	4.03	3.94
1,842 x 5,620 x 1,000	1,842 x 5,570 x 1,000	1,842 x 5,620 x 1,000	1,842 x 5,980 x 1,000	1,842 x 5,980 x 1,000	1,842 x 6,340 x 1,000	1,842 x 6,340 x 1,000
1,335	1,345	1,380	1,440	1,440	1,500	1,500
89.4 / 86.1	95.5 / 92.1	96.4 / 92.9	100.3 / 96.6	105.3 / 101.5	108.0 / 104.1	113.0 / 109.0
58.2	62.2	62.8	65.3	68.6	71.1	74.4
79.2 / 76.3	83.1 / 80.1	84.7 / 81.7	87.7 / 84.5	92.0 / 88.7	93.4 / 90.0	98.3 / 94.7
51.0	54.1	54.6	56.5	59.3	60.8	64.0
7	7	8	8	8	8	8
76,440	86,340	76,440	86,820	86,820	97,200	97,200
21,233	23,983	21,233	24,116	24,116	27,000	27,000
44.6	44.1	44.6	44.3	44.3	44.0	44.0
80	80	80	80	80	80	80
Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)
Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)						
66.5	65.5	66.5	66.5	66.5	66.0	66.0
61.5	60.5	61.5	61.5	61.5	61.0	61.0
87.5	86.5	87.5	87.5	87.5	87.0	87.0


2-PIPE FSV-EX ME2 Series SPACE SAVING COMBINATION MODEL

22.4 /28.0kW


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing tube downward
C: (Installation hole pitch)

Top view

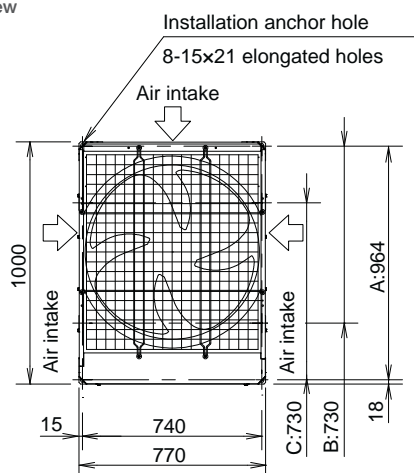

Front view

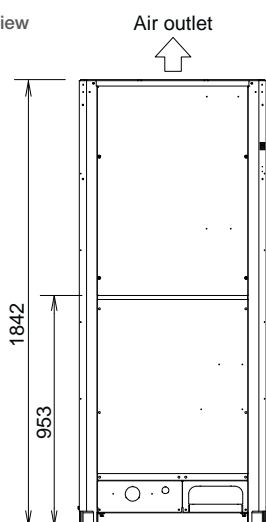


unit: mm

33.5 /40.0 /45.0kW


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing tube downward
C: (Installation hole pitch)

Top view

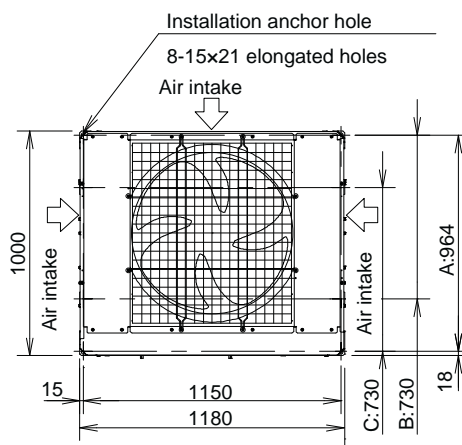

Front view

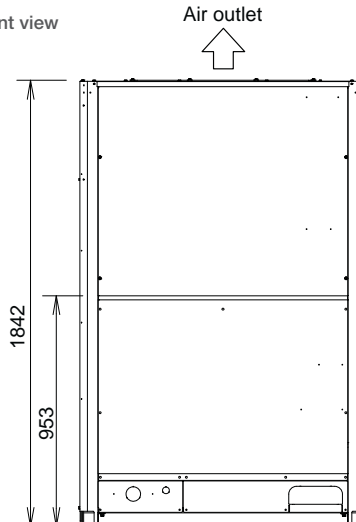


unit: mm

50.0 /56.0kW


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
 B: (Installation hole pitch) For removing tube downward
 C: (Installation hole pitch)

Top view

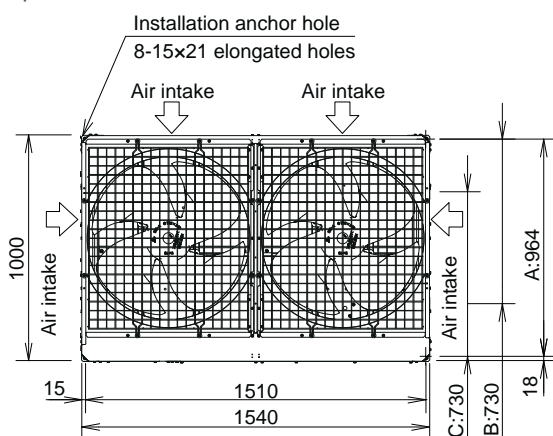


Front view

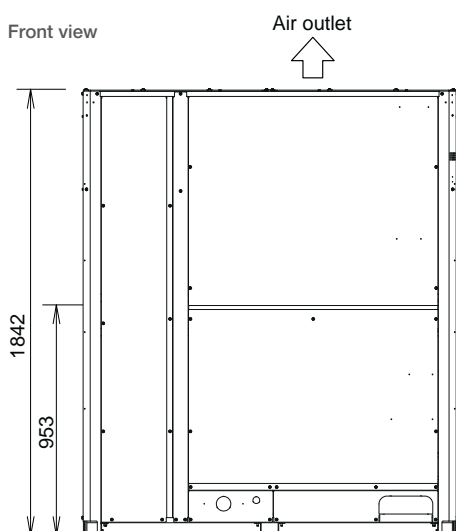

unit: mm

Piping Design

Select installation locations so that the lengths and sizes of refrigerant piping are within the allowable ranges shown in the figure below.

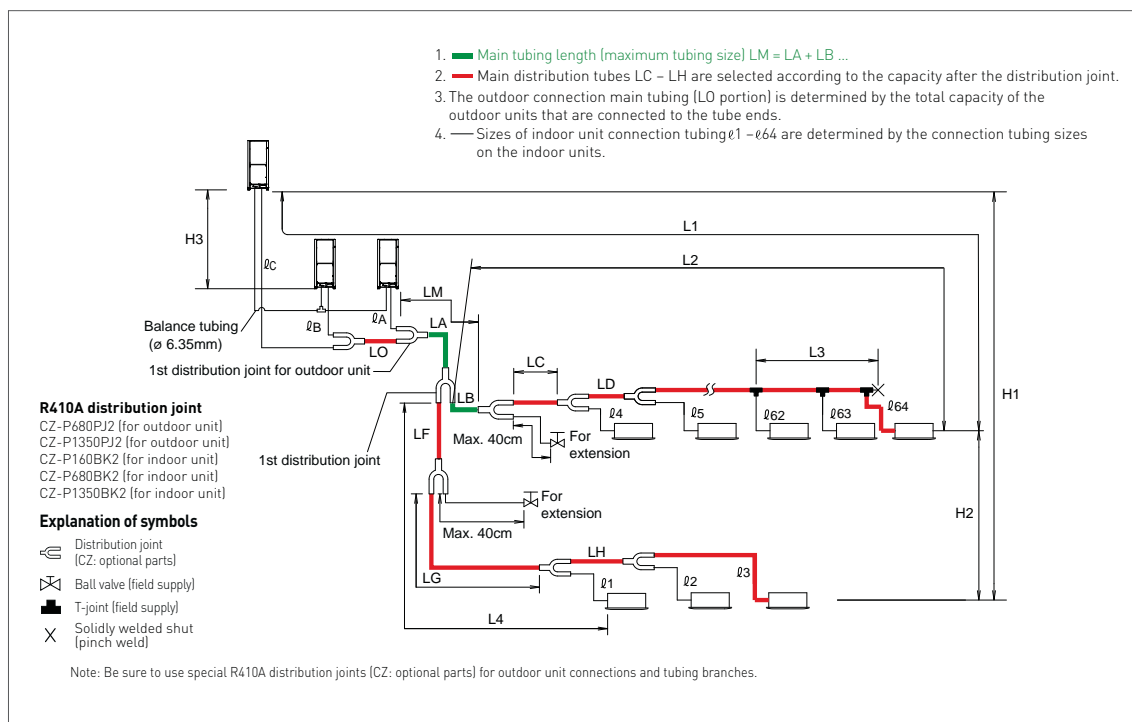

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Items	Mark	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual length $\leq 200^{*2}$ Equivalent length $\leq 210^{*2}$
	ΔL (L2-L4)	Difference between max. length and min. length from the 1st distribution joint	$\leq 50^{*5}$
	LM	Max. length of main piping (at maximum size) * Even after 1st distribution joint, LM is allowed if at maximum piping length.	— ^{*3}
	$\phi 1, \phi 2 \sim \phi 64$	Max. length of each distribution tube	$\leq 30^{*7}$
	$L1 + \phi 1 + \phi 2 \sim \phi 63 + \phi A + \phi B + LF + LG + LH$	Total max. piping length including length of each distribution tube (only liquid piping)	≤ 1000
	$\phi A, \phi B + LO, \phi C + LO$	Maximum piping length from outdoor's 1st distribution joint to each outdoor unit	≤ 10
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤ 50
	H2	When outdoor unit is installed lower than indoor unit	≤ 40
	H3	Max. difference between indoor units	$\leq 15^{*6}$
Allowable length of joint piping	L3	T-joint piping (field-supply); Max. piping length between the first T-joint and solidly welded-shut end point	≤ 2

L = Length, H = Height

NOTE

- The outdoor connection main piping (LO portion) is determined by the total capacity of the outdoor units that are connected to the tube ends.
- If the longest piping length (L1) exceeds 90m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for gas tubes and liquid tubes. Use a field supply reducer. Select the tube size from the table of main piping sizes (Table 3) and from the table of refrigerant piping sizes (Table 8) on the second following page.
- If the longest main piping length (LM) exceeds 50m, increase the main piping size at the portion before 50m by 1 rank for the gas tubes. Use a field supply reducer. Determine the length less than the limitation of allowable maximum piping length. For the portion that exceeds 50m, set based on the main piping size (LA) listed in Table 3.
- If the size of the existing piping is already larger than the standard piping size, it is not necessary to further increase the size.
 * If the existing piping is used, and the amount of on-site refrigerant charge exceeds the value listed below, then change the size of the piping to reduce the amount of refrigerant.
 Total amount of refrigerant for the system with 1 outdoor unit: 50kg
 Total amount of refrigerant for the system with 2 outdoor units: 80kg
 Total amount of refrigerant for the system with 3 outdoor units or 4 outdoor units: 105kg
- When the piping length exceeds 40 m, increase a longer liquid or gas piping by 1 rank. Refer to the Technical Data for the details.
- If the total distribution piping length exceeds 500m, maximum allowable elevation difference (H2) between the indoor units is calculated by the following formula. Make sure the indoor unit's actual elevation difference should fall within the figure calculated as follows.
 Unit of account (meter): $15 \times (2 - \text{total piping length(m)} \div 500)$
- If any of the piping length exceeds 30m, increase the size of the liquid and gas tubes by 1 rank.

Necessary amount of additional refrigerant charge per outdoor unit

U-8ME2R8	U-10ME2R8	U-12ME2R8	U-14ME2R8	U-16ME2R8	U-18ME2R8	U-20ME2R8
0 kg	0 kg	4.0 kg	4.0 kg	4.0 kg	5.5 kg	5.5 kg

System limitations

Max. No. allowable connected outdoor units	4 *2
Max. capacity allowable connected outdoor units	224kW
Max. connectable indoor units	64 *1
Max. allowable indoor/outdoor capacity ratio	50-130% *3

*1: In the case of 107.0kW or smaller units, the number is limited by the total capacity of the connected indoor units.

*2: Up to 4 units can be connected if the system has been extended.

*3: If the following conditions are satisfied, the effective range is above 130% and below 200%.

i) Obey the limited number of connectable indoor units.

ii) The lower limit of operating range for heating outdoor temperature is limited to -10°CWB (standard -25°CWB).

iii) Simultaneous operation is limited to less than 130% of connectable indoor units.

Additional refrigerant charge

Liquid piping size mm (inches)	Amount of refrigerant charge/m (g/m)
ø6.35 (ø1/4)	26
ø9.52 (ø3/8)	56
ø12.7 (ø1/2)	128
ø15.88 (ø5/8)	185
ø19.05 (ø3/4)	259
ø22.22 (ø7/8)	366

Refrigerant piping

Piping size mm (inches)			
Material O		1/2 H, H material	
Outer diameter	Wall thickness	Outer diameter	Wall thickness
ø6.35 (ø1/4)	t 0.8 mm	ø22.22 (ø7/8)	t 1.0 mm
ø9.52 (ø3/8)	t 0.8 mm	ø 25.4 (ø1)	t 1.0 mm
ø12.7 (ø1/2)	t 0.8 mm	ø 28.58 (ø1-1/8)	t 1.0 mm
ø15.88 (ø5/8)	t 1.0 mm	ø 31.75 (ø1-1/4)	t 1.1 mm
ø19.05 (ø3/4)	t 1.0 mm	ø 38.1 (ø1-1/2)	t 1.15 mm
		ø 41.28 (ø1-5/8)	t 1.20 mm

Note: When pipe bending is to be performed, the bending radius shall be at least 4 times the outer diameter. Also, take sufficient care to prevent pipe collapse and damage at the time of bending.



Refrigerant Branch Pipes (optional accessories) for 2-PIPE ME2 Series

Optional Distribution Joint Kits

See the installation instructions packaged with the distribution joint kit for the installation procedure.


Model name	Cooling capacity after distribution	Remarks
1. CZ-P680PJ2	68.0kW or less	For outdoor unit
2. CZ-P1350PJ2	168.0kW or less	For outdoor unit
3. CZ-P160BK2	22.4kW or less	For indoor unit
4. CZ-P680BK2	68.0kW or less	For indoor unit
5. CZ-P1350BK2	168.0kW or less	For indoor unit

Piping size (with thermal insulation)


1. CZ-P680PJ2

Use: For outdoor unit (Capacity after distribution joint is 68.0kW or less.)

GAS PIPING

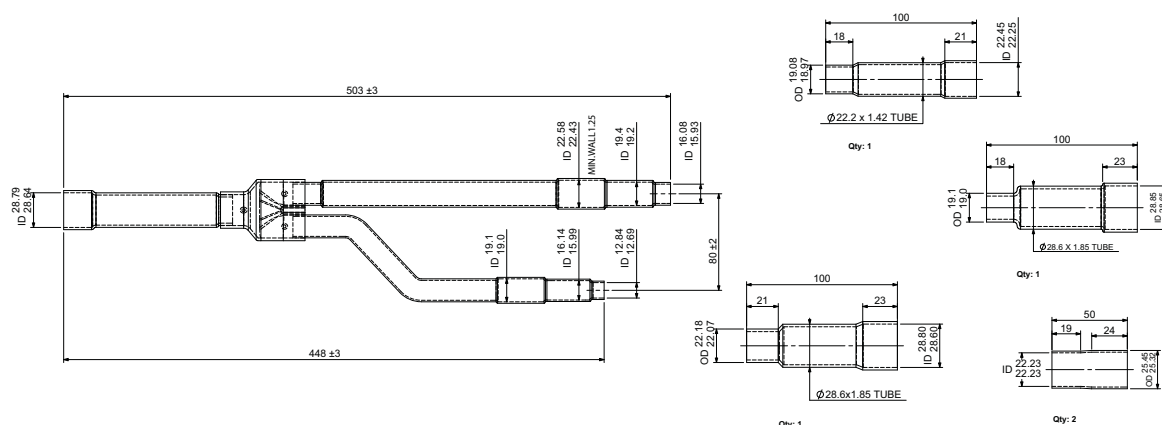

LIQUID PIPING

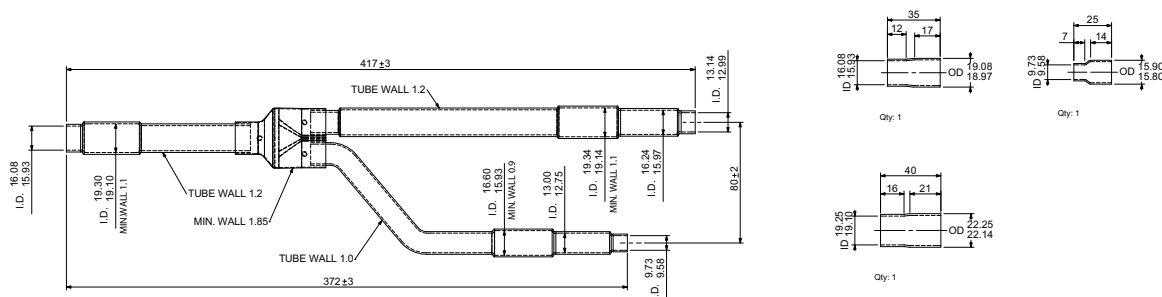


All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.


2. CZ-P1350PJ2

Use: For outdoor unit (Capacity after distribution joint is greater than 68.0kW and no more than 168.0kW.)

GAS PIPING

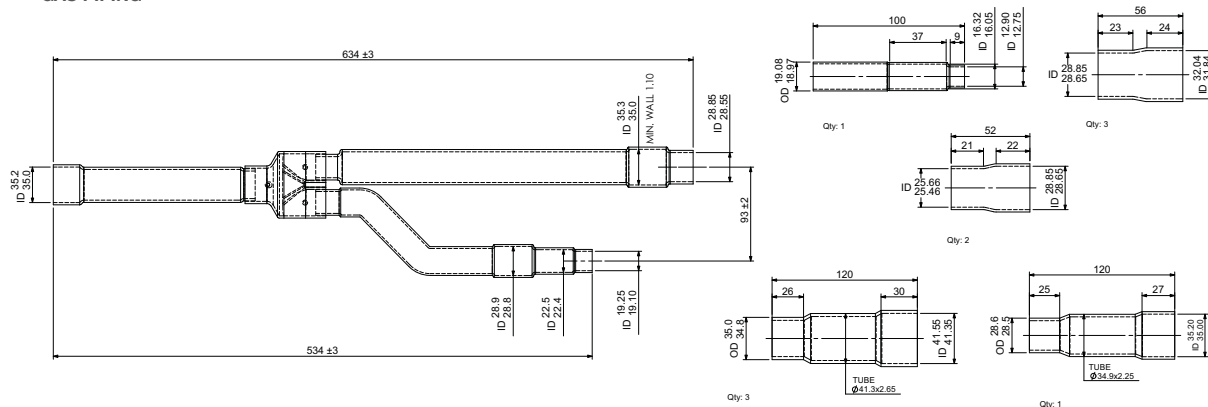

LIQUID PIPING

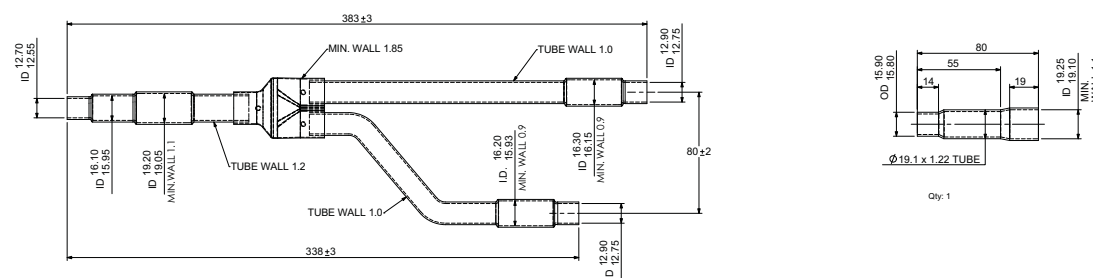


All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.


3. CZ-P160BK2

Use: For indoor unit (Capacity after distribution joint is 22.4kW or less.)

GAS PIPING

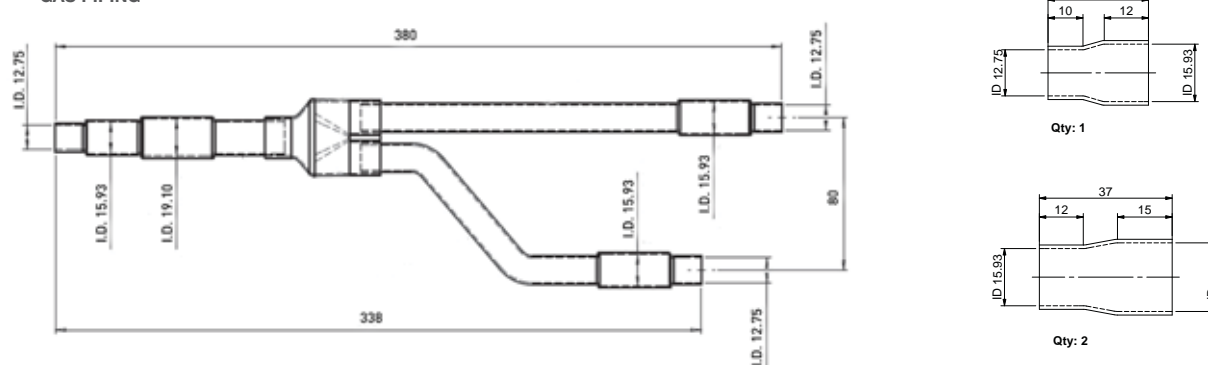

LIQUID PIPING

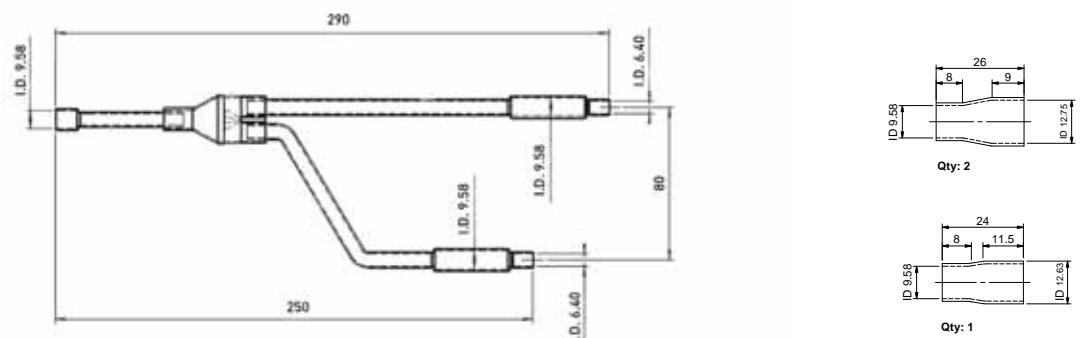

All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.


Refrigerant Branch Pipes (optional accessories) for 2-PIPE ME2 Series

Piping size (with thermal insulation)


4. CZ-P680BK2

Use: For indoor unit (Capacity after distribution joint is greater than 22.4kW and no more than 68.0kW.)

GAS PIPING

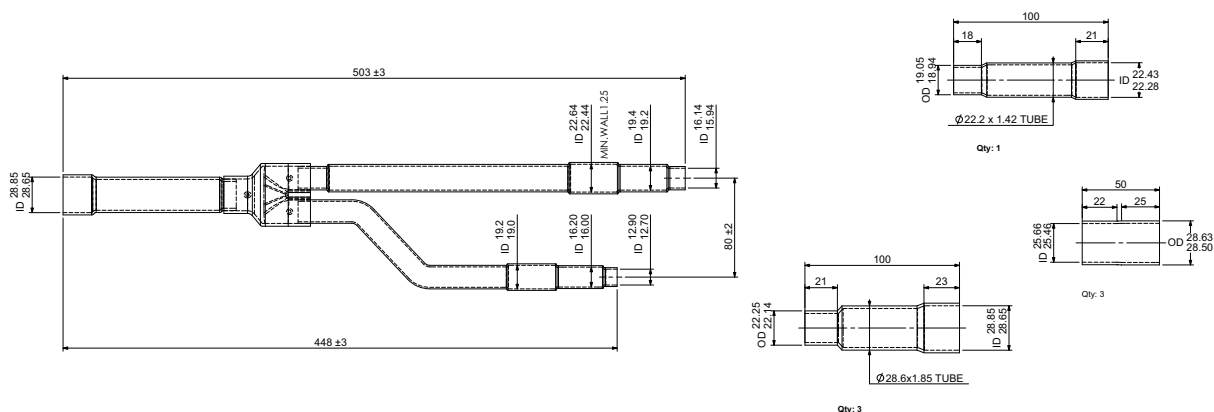

LIQUID PIPING

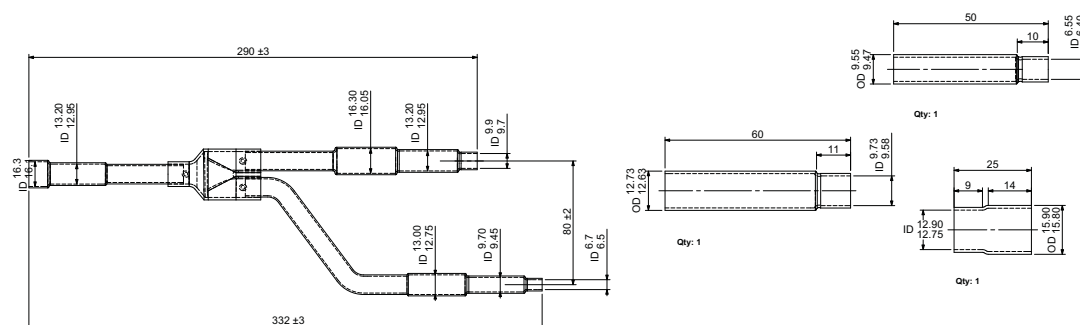


All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.


5. CZ-P1350BK2

Use: For indoor unit (Capacity after distribution joint is greater than 68.0kW and no more than 168.0kW.)

GAS PIPING

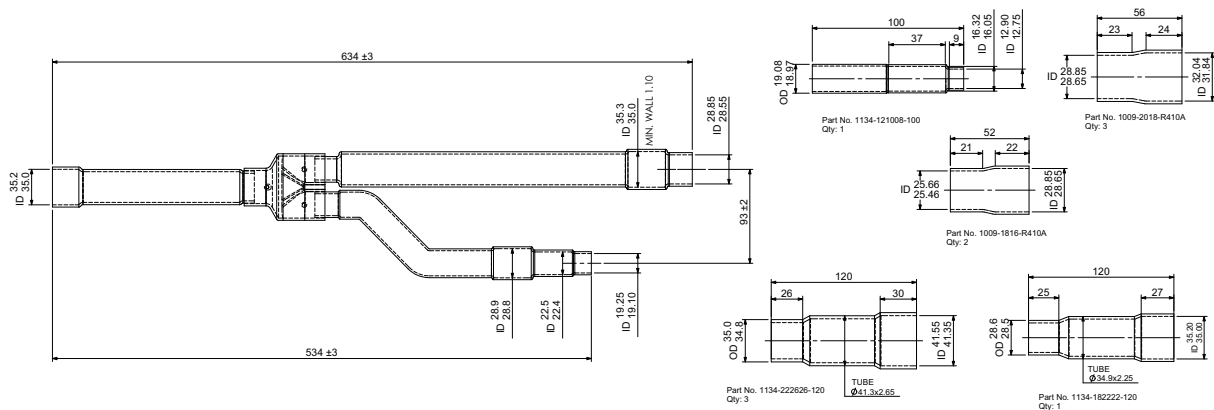

LIQUID PIPING

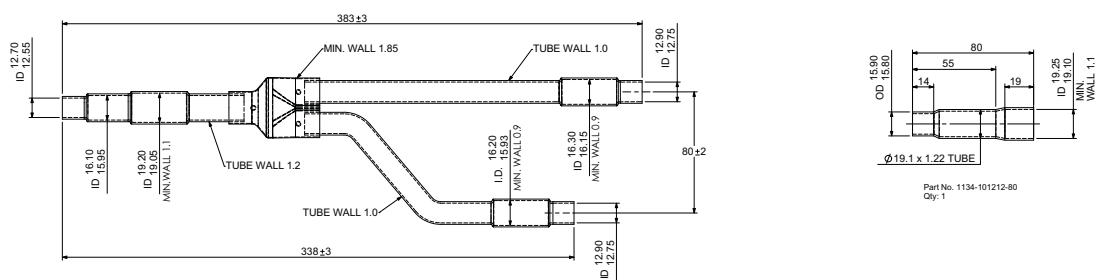

All measurements are in mm. Size of connection points on each part shown are inside diameters of piping







Simultaneous heating and cooling VRF system

3-PIPE FSV MF2 Series

Heat Recovery Type

New 3-PIPE FSV MF2 series enables simultaneous heating and cooling operation

- Suitable for R22 renewal projects* 
 - Demand response ready (Peak cut) 
- *Refer to Technical Document for further details

Notes:

* Office building with diverse room temperatures due to the different amount of sunshine received.


* The building with computer/business equipment rooms requiring year-round cooling.





Fully-automatic simultaneous cooling/heating operation and heat recovery


3-PIPE MF2 series enables simultaneous heating and cooling operation by each solenoid valve kit. New design to decrease chattering noise at low capacity load.

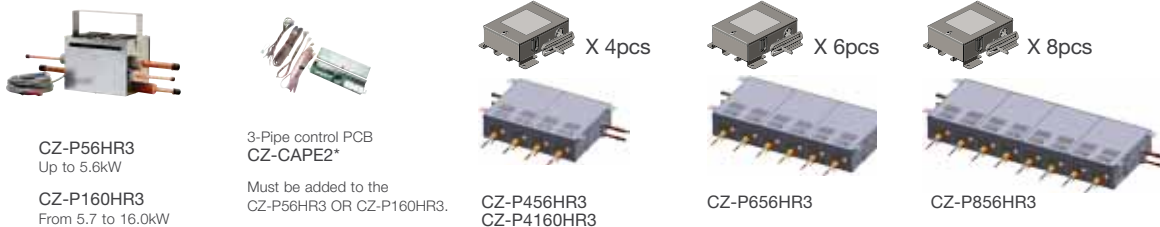

Individual control of multiple indoor units with solenoid valve kits

- Any design and layout can be used in a single system.
- Cooling operation is possible up to an outdoor temperature of -10°C DB.

System Structure

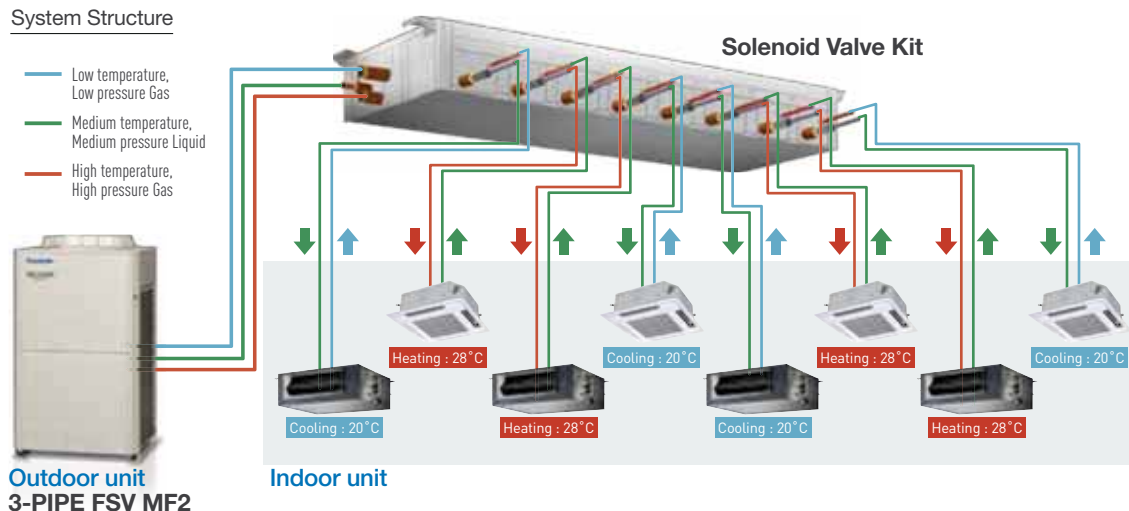


Simultaneous heating and cooling VRF system

3-PIPE FSV MF2 Series


New Solenoid Valve Kit Multiple Connection Port Type

With the new Panasonic Solenoid Valve Kit field installation work becomes more easy. In fact, our latest technology is designed for new body packages with additional branch-kits and 3-way control PCB. Connection tubing for main refrigerant circuit line appears on both sides of the unit. This helps the system design and the piping layout becomes more flexible.


System Structure

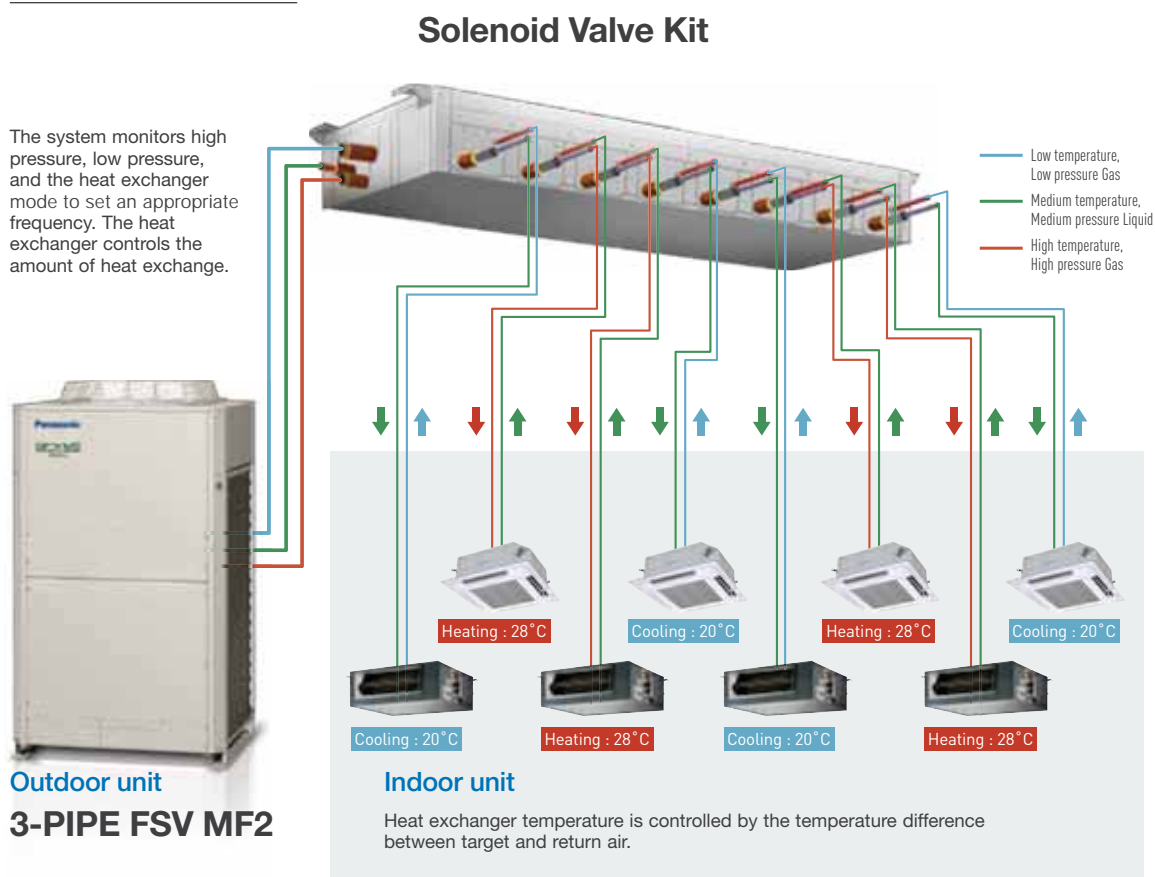


CZ-P456HR3
CZ-P4160HR3



CZ-P656HR3



CZ-P856HR3



1 port

4 port

6 port

8 port

56 type

CZ-P56HR3

CZ-P456HR3

CZ-P656HR3

CZ-P856HR3

160 type

CZ-P160HR3


CZ-P4160HR3

--

--

Solenoid Valve Kit / Wiring Work

Current Model / Single Connection Type

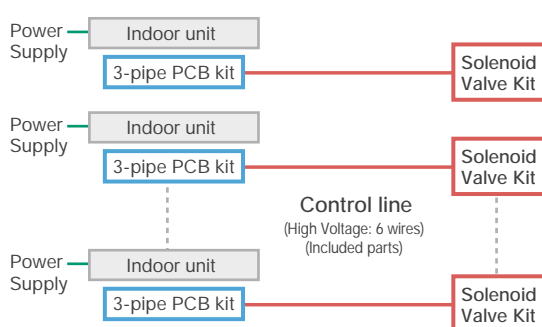


Parts included
in HR3 kit



3-way PCB kit
(separately purchased)




New Model / Multiple Connection Type

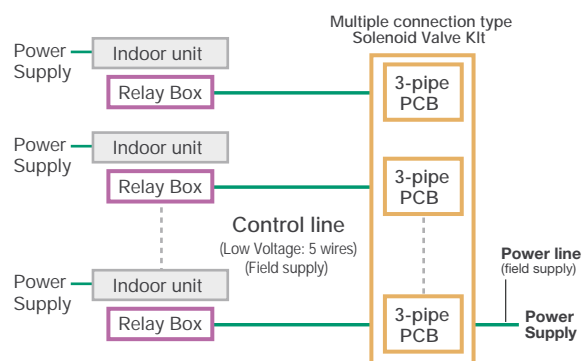

Parts included
in HR3 kit



Signal Relay Box
(included accessory)



Simultaneous heating and cooling VRF system

3-PIPE FSV MF2 Series

Increased maximum number of connectable indoor units

The 3-PIPE MF2 series has four DC inverter outdoor units from 22.4kW to 40.0kW as do the basic models, and by combining up to three units, an air-conditioning capacity of 22.4kW to 118.0kW can be set according to the user's needs.

System (kW)	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0
Outdoor units	8	10	12	14	8	10	12	14	14	14	14	8	8	8	8	10	12	14
					8	8	8	8	10	12	14	8	12	12	14	14	14	14
												14	12	14	14	14	14	14
Connectable indoor units	13	16	19	23	26	29	33	36	40	43	46	50	52	52	52	52	52	52

Connectable indoor/outdoor unit capacity ratio up to 150%

Long piping design


Adaptable to various building types and sizes

Actual piping length: 180m

Max piping length: 500m

*1: 40 m if the outdoor unit is below the indoor unit.


Max. total length: 500 m

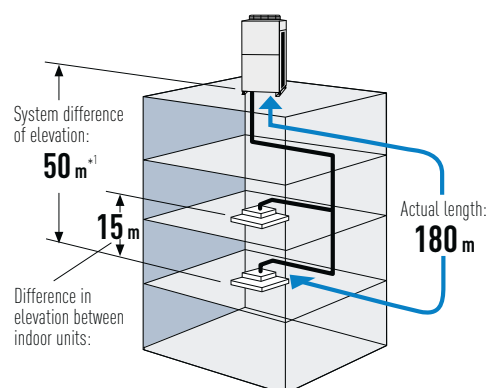


Excellent energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, new DC motor and new fan guard with low-loss wire guard. In addition, heat exchanger has been redesigned from 3-direction suction to 4-direction suction to efficiently distribute air speed.

COOLING MF2 MF1

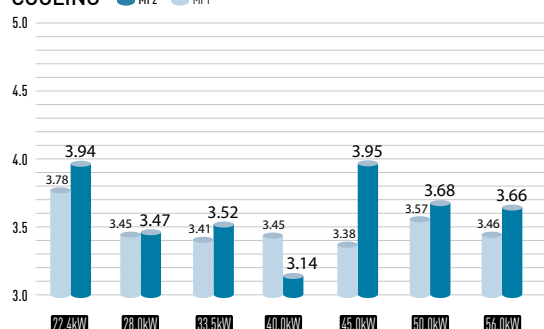


HEATING MF2 MF1

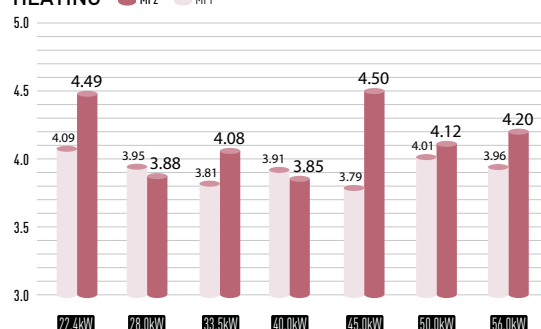

Up to 40m piping after first branch


Up to 52 units can be connected to one system. Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools and hospitals.

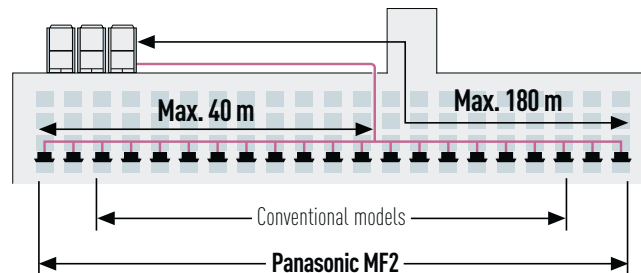

Extended operating range

Cooling operation range:


The cooling operation range has been extended to -10°C DB by changing the outdoor fan to an inverter type.

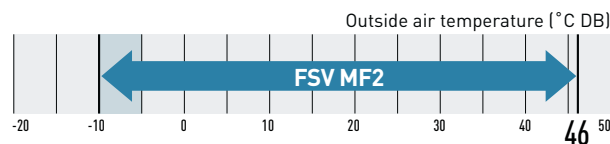

Heating operation range:

Stable heating operation even with an outside air temperature of -20°C WB

The heating operation range has been extended to -20°C WB by use of a compressor with a high-pressure vessel.

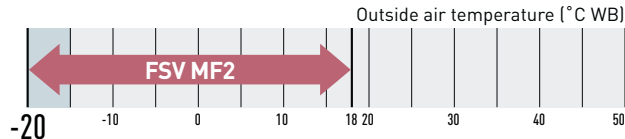


Remark: Cooling/heating capacity depends on indoor/outdoor temperature. Please refer technical databook.

Wide temperature setting range

Wired remote control heating temperature setting range is 16 to 30°C

Compact design

The new MF2 series has reduced the installation space required with up to 40.0kW available in a single chassis. 22.4kW - 40.0kW units are able to fit inside a lift for easy handling onsite.

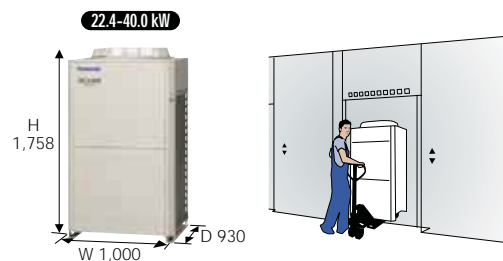

High performance fan


Optimised air flow

High performance fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



Simultaneous heating and cooling VRF system

3-PIPE FSV MF2 Series

High external unit static pressure

Customisable onsite settings allow all models to provide up to 80Pa due to the high performance fan, fan guard, fan motor and casing. The flexible design allows connection of an air discharge duct to avoid a reduction in performance due to a shortage of air circulation. This feature allows the outdoor unit to be installed inside balconies on every floor of tall buildings.



Fan Guard



Fan



Fan Motor and Casing


High static pressure

up to
80Pa

Extended compressor life by uniform compressor operation time

The total run-time of compressors are monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.


Compressors with histories showing shorter run-times are selected first, ensuring equal wear and tear across all units and extending the working life of the system.

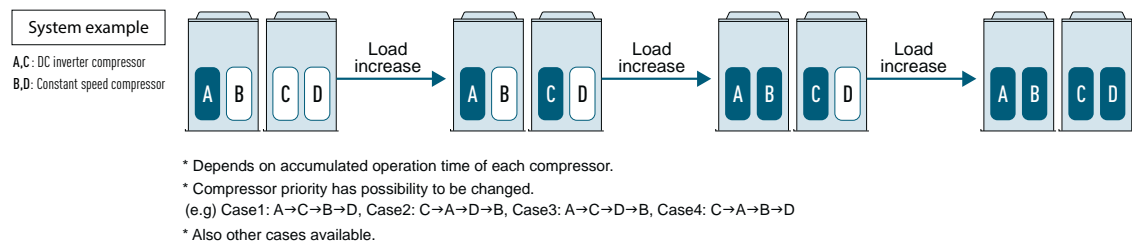

Automatic backup operation in the case of compressor failure or outdoor unit malfunction

(Except for single unit installation)

*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service.
Users should contact their authorised service centre as soon as fault occurs.

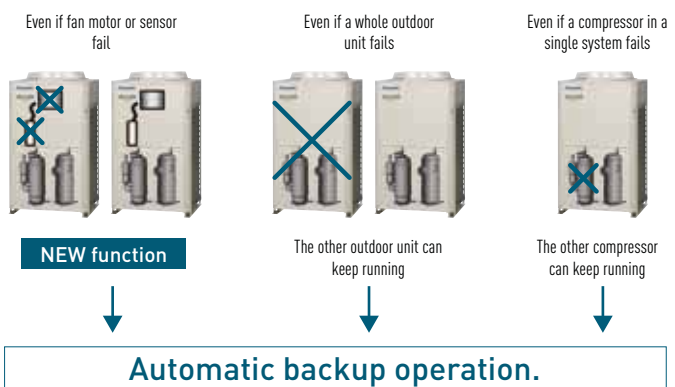

Demand response

Featuring inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.

Demand control terminal is available to control 0-50-75-100% of capacities.


MF2 series features a DR terminal as standard (not a required option)




Flexible Demand Response with the CZ-CAPDC2*1

Setting is possible at 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been finalised to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

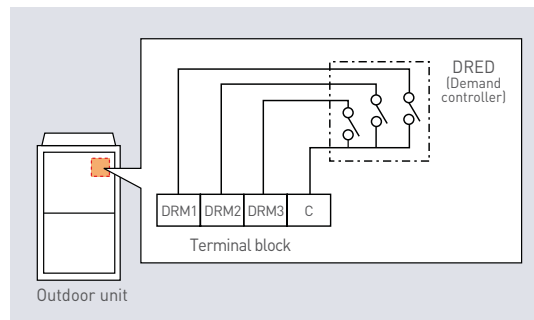

Demand Response Signal	Power Input
DRM 1	0%
DRM 2	50%
DRM 3	75%

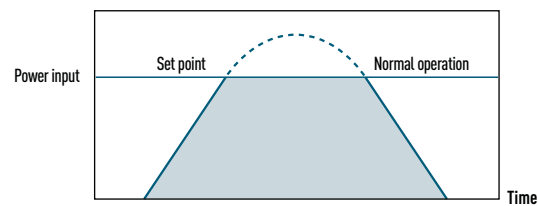


	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	


Anti-Corrosion outdoor unit

Corrosion-resistance treated for high resistance to rust and salty air assuring long-lasting performance.


Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.

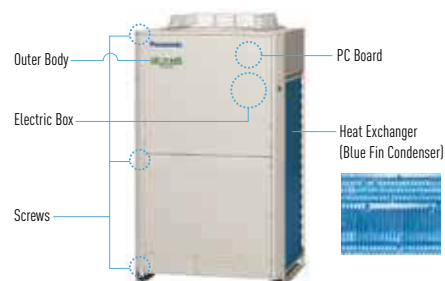



3-PIPE FSV MF2 Series


Appearance										
kW			22.4	28.0	33.5	40.0	45.0	50.0	56.0	
			U-8MF2R7B	U-10MF2R7B	U-12MF2R8B	U-14MF2R8B	U-8MF2R7B U-8MF2R7B	U-8MF2R7B U-10MF2R7B	U-8MF2R7B U-12MF2R8B	
Power supply			415V/3-phase/50Hz							
Capacity	Cooling	kW	22.4	28.0	33.5	39.2	45.0	50.4	56.0	
		BTU/h	76,500	95,600	114,300	133,800	153,600	172,000	191,100	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.5	63.0	
		BTU/h	85,300	107,500	128,000	153,600	170,600	192,800	215,000	
EER / COP	Cooling	W/W	3.94	3.47	3.52	3.14	3.95	3.68	3.66	
	Heating	W/W	4.49	3.88	4.08	3.85	4.50	4.12	4.20	
Dimensions	H x W x D	mm	1,758x1,000x930	1,758x1,000x930	1,758x1,000x930	1,758x1,000x930	1,758x2,060x930	1,758x2,060x930	1,758x2,060x930	
Net weight		kg	269	269	314	322	538	538	583	
Electrical ratings	Cooling	Running current	A	8.59	11.9	14.7	18.9	17.2	20.3	23.4
		Power input	kW	5.68	8.06	9.53	12.5	11.4	13.7	15.3
	Heating	Running current	A	8.52	12.3	14.4	17.9	16.8	20.3	22.9
		Power input	kW	5.57	8.12	9.20	11.7	11.1	13.7	15.0
Air flow rate		m³/h	9,480	10,680	12,720	12,720	18,960	20,160	22,200	
		L/s	2,633	2,967	3,533	3,533	5,267	5,600	6,167	
Refrigerant amount at shipment		kg	8.3	8.5	8.8	9.3	16.6	16.8	17.1	
Piping connections	Suction pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	
	Discharge pipe	mm (inches)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range										
Sound pressure level	Normal mode	dB (A)	57	59	61	62	60	61	62.5	
	Silent mode	dB (A)	54	56	58	59	57	58	59.5	
GLOBAL REMARKS	Rated conditions:	Cooling	Heating	These specifications are subject to change without notice. * For mixed heating and cooling operation with an outdoor temperature in excess of 24°C DB, please use 50% or more of the kilowatt of the outdoor unit for cooling operation.						
	Indoor air temperature	27°C DB / 19°C WB	20°C DB							
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB							

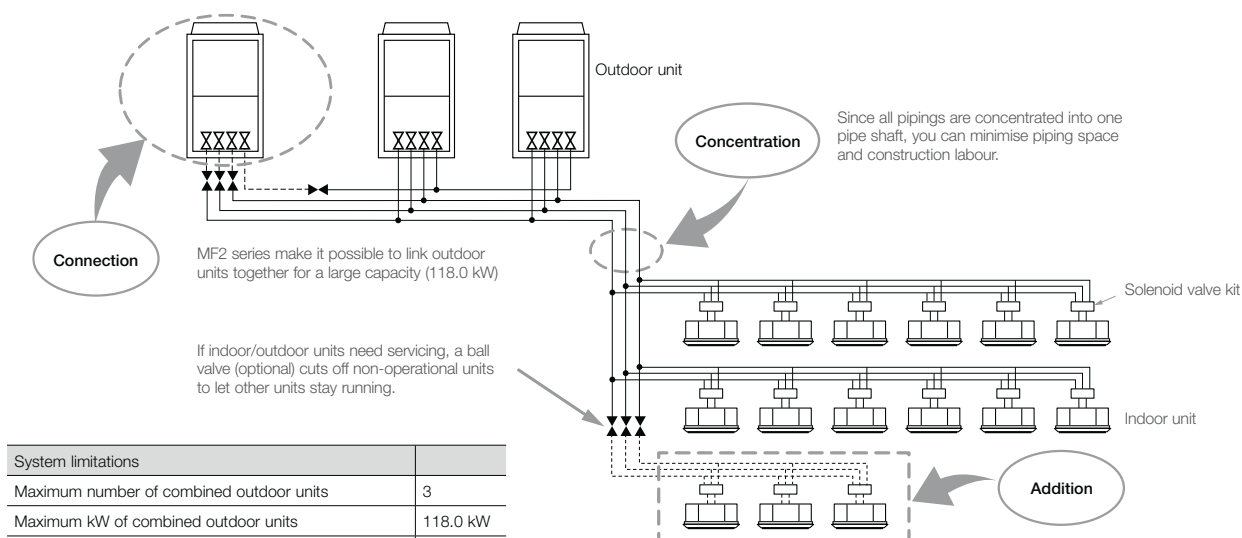System example




										
61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0
U-8MF2R7B U-14MF2R8B	U-10MF2R7B U-14MF2R8B	U-12MF2R8B U-14MF2R8B	U-14MF2R8B U-14MF2R8B	U-8MF2R7B U-8MF2R7B U-14MF2R8B	U-8MF2R7B U-12MF2R8B U-12MF2R8B	U-8MF2R7B U-12MF2R8B U-14MF2R8B	U-8MF2R7B U-14MF2R8B U-14MF2R8B	U-10MF2R7B U-14MF2R8B U-14MF2R8B	U-12MF2R8B U-14MF2R8B U-14MF2R8B	U-14MF2R8B U-14MF2R8B U-14MF2R8B
415V3-phase/50Hz										
61.5	68.0	73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0
209,900	232,100	249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700
69.0	76.5	81.5	87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0
235,500	261,100	278,200	298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500
3.40	3.25	3.29	3.13	3.50	3.60	3.42	3.28	3.21	3.23	3.13
4.80	3.86	3.98	3.91	4.17	4.17	4.04	4.01	3.90	3.92	3.89
1,758x2,060x 930	1,758x2,060x 930	1,758x2,060x 930	1,758x2,060x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930	1,758x3,120x 930
591	591	636	644	860	897	905	913	913	958	966
27.4	31.3	33.6	38.0	36.8	38.2	42.5	46.6	49.8	52.9	57.0
18.1	20.9	22.2	25.1	24.3	25.0	28.1	30.8	33.3	35.0	37.7
25.6	29.6	31.0	33.9	34.5	36.7	40.4	42.6	45.6	49.0	51.3
16.9	19.8	20.5	22.4	22.8	24.0	26.7	28.2	30.5	32.4	33.9
22,200	22,200	25,440	25,440	31,680	34,920	34,920	34,920	36,120	38,160	38,160
6,167	6,167	7,067	7,067	8,800	9,700	9,700	9,700	10,033	10,600	10,600
17.6	17.8	18.1	18.6	25.9	25.9	26.4	26.9	27.1	27.4	27.9
Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)
Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling/Dry: -10°C~+46°C (DB). Heating: -20°C~+18°C (WB) Simultaneous operation: -10°C~+24°C (DB)										
63	64	64.5	65	64	65	65	65.5	66	66.5	67
60	61	61.5	62	61	62	62	62.5	63	63.5	64

Dimensions

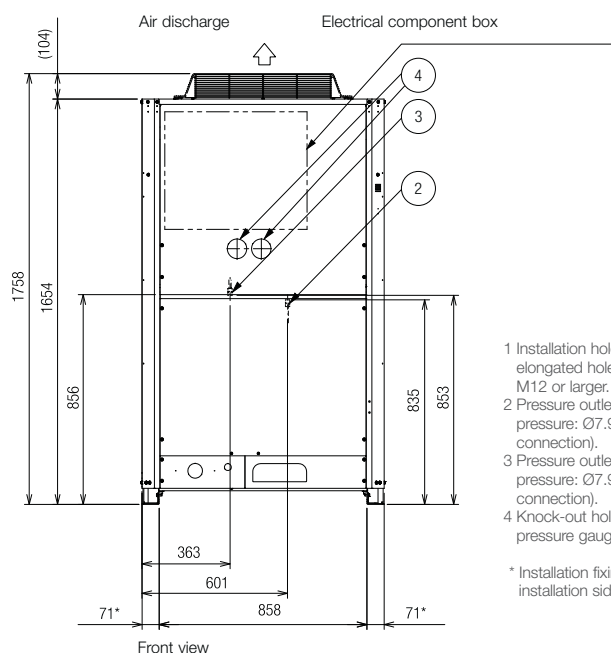


- 1 Installation holes (8-15x21 elongated holes) anchor bolts M12 or larger.
- 2 Pressure outlet port (for high pressure: Ø7.94 Scader-type connection).
- 3 Pressure outlet port (for low pressure: Ø7.94 Scader-type connection).
- 4 Knock-out hole for connecting pressure gauge (optional).

* Installation fixing bracket, installation side.



- A 894 (installation hole pitch).
The piping is routed out from the front.
- B 730 (installation hole pitch).
The piping is routed out from the front.
- C 730 (installation hole pitch).

Piping design

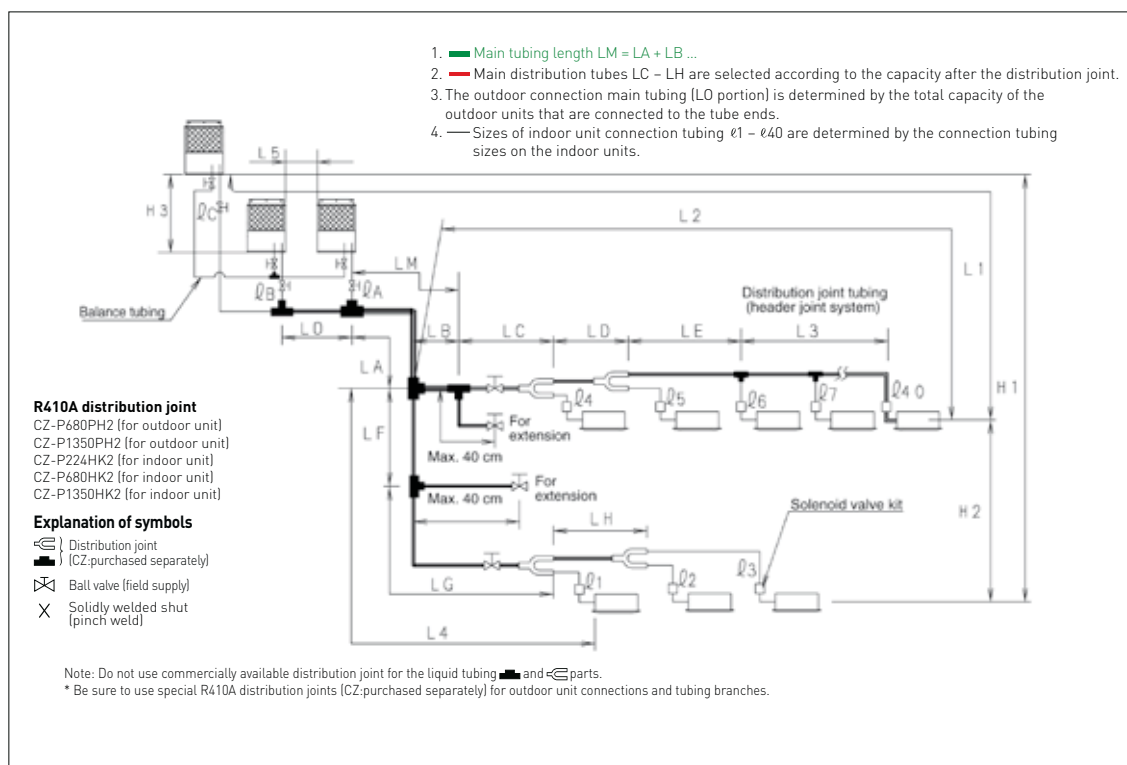

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Items	Mark	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual piping length ≤ 180 □
			Equivalent piping length ≤ 200
	$\Delta L (L2 - L4)$	Difference between the max. length and the min. length from the No.1 distribution joint	≤ 40
	LM	Max. length of main piping (at max. diameter)	— □
	$\ell 1, \ell 2 \dots \ell 40$	Max. length of each distribution pipe	≤ 30
	$L1 + \ell 1 + \ell 2 \dots \ell 39 + \ell A + \ell B + LF + LG + LH$	Total max. piping length including length of each distribution (only liquid piping)	≤ 500 □
Allowable elevation difference	L5	Distance between outdoor unit	≤ 10
	H1	When outdoor unit is installed higher than indoor unit	≤ 50
		When outdoor unit is installed lower than indoor unit	≤ 40
	H2	Max. difference between indoor units	≤ 15
Allowable length of joint piping	L3	Distribution joint piping: Max. piping length between the first distribution joint and solidly welded-shut end point	≤ 2

L = Length, H = Height

□ If the longest piping length (L1) exceeds 90m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for the discharge tubes, and narrow tubes. (field supplied).

□ If the longest main tube length (LM) exceeds 50m, increase the main tube size at the portion before 50 m by 1 rank for the suction tubes and discharge tubes. (field supplied). (For the portion that exceeds 50m, set based on the main tube sizes [LA] listed in the table on the following page).

□ 85.0kW of combination is 300m.

Necessary amount of additional refrigerant charge per outdoor unit

Model	U-8MF2R7B	U-10MF2R7B	U-12MF2R8B	U-14MF2R8B
Amount	8.0 kg	8.3 kg	8.5 kg	9.0 kg

System limitations

Max. number of combined outdoor units	3
Max. kW of combined outdoor units	118kW
Max. number of connectable indoor units	52
Indoor/outdoor unit capacity ratio	50-150%

*1: In the case of 68.0kW or smaller units, the number is limited by the total capacity of the connected indoor units.

*2: Up to 3 units can be connected if the system has been extended.

*3: It is strongly recommended that you choose the unit so the load can range between 50 and 130%.

Additional refrigerant charge

Liquid piping size mm (inches)	Amount of refrigerant charge/m (g/m)
ø6.35 (ø1/4)	26
ø9.52 (ø3/8)	56
ø12.7 (ø1/2)	128
ø15.88 (ø5/8)	185
ø19.05 (ø3/4)	259
ø22.22 (ø7/8)	366

Refrigerant piping

Piping size mm (inches)			
Material O		1/2 H, H material	
Outer diameter	Wall thickness	Outer diameter	Wall thickness
ø6.35 (ø1/4)	t 0.8 mm	ø22.22 (ø7/8)	t 1.0 mm
ø9.52 (ø3/8)	t 0.8 mm	ø 25.4 (ø1)	t 1.0 mm
ø12.7 (ø1/2)	t 0.8 mm	ø 28.58 (ø1-1/8)	t 1.0 mm
ø15.88 (ø5/8)	t 1.0 mm	ø 31.75 (ø1-1/4)	t 1.1 mm
ø19.05 (ø3/4)	t 1.0 mm	ø 38.1 (ø1-1/2)	t 1.15 mm
		ø 41.28 (ø1-5/8)	t 1.20 mm

Note: When pipe bending is to be performed, the bending radius shall be at least 4 times the outer diameter.
Also, take sufficient care to prevent pipe collapse and damage at the time of bending.



Refrigerant Branch Pipes (optional accessories) for 3-Way MF2 Series


Optional Distribution Joint Kits

See the installation instructions packaged with the distribution joint kit for the installation procedure.

Model name	capacity after distribution JOINT	Remarks
1. CZ-P680PH2	68.0kW or less	For outdoor unit
2. CZ-P1350PH2	greater than 68.0 kW and no more than 118.0kW	For outdoor unit
3. CZ-P224BH2	22.4kW or less	For indoor unit
4. CZ-P680BH2	greater than 22.4 kW and no more than 68.0kW	For indoor unit
5. CZ-P1350BH2	greater than 68.0 kW and no more than 118.0kW	For indoor unit

1. CZ-P680PH2


Use: For outdoor unit (Capacity after distribution joint is 68.0kW or less.)

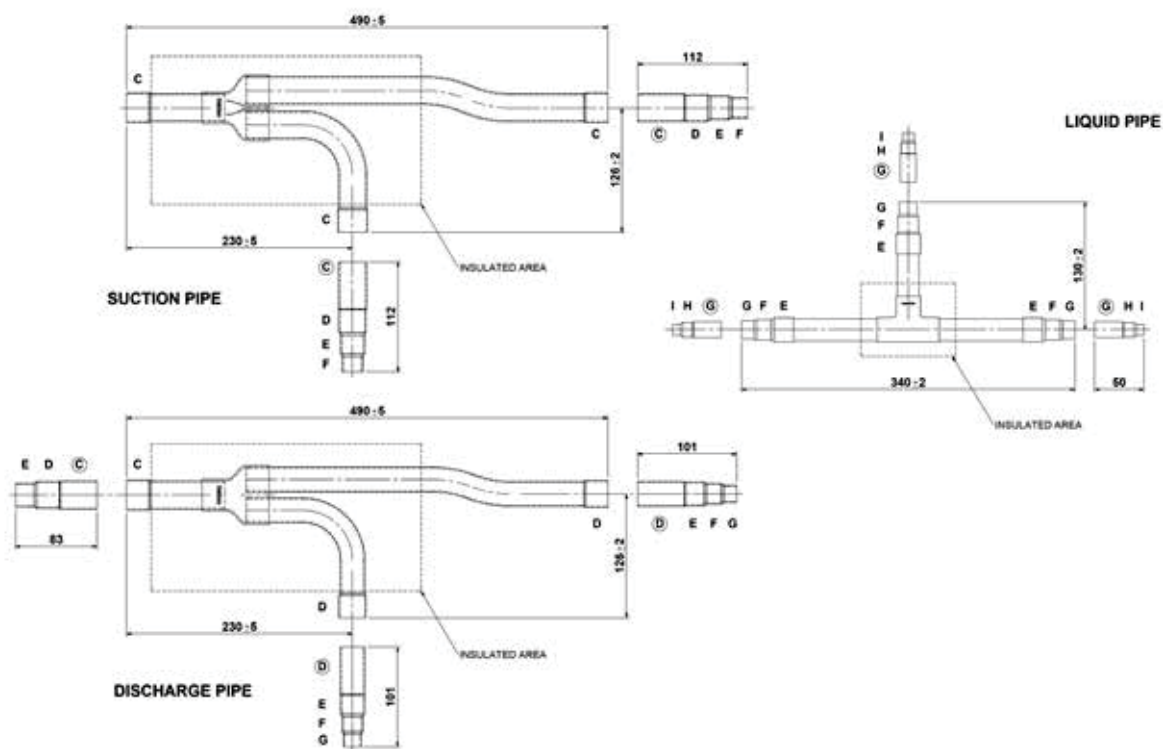

All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.

2. CZ-P1350PH2


Use: For outdoor unit (Capacity after distribution joint is greater than 68.0kW and no more than 118.0kW.)

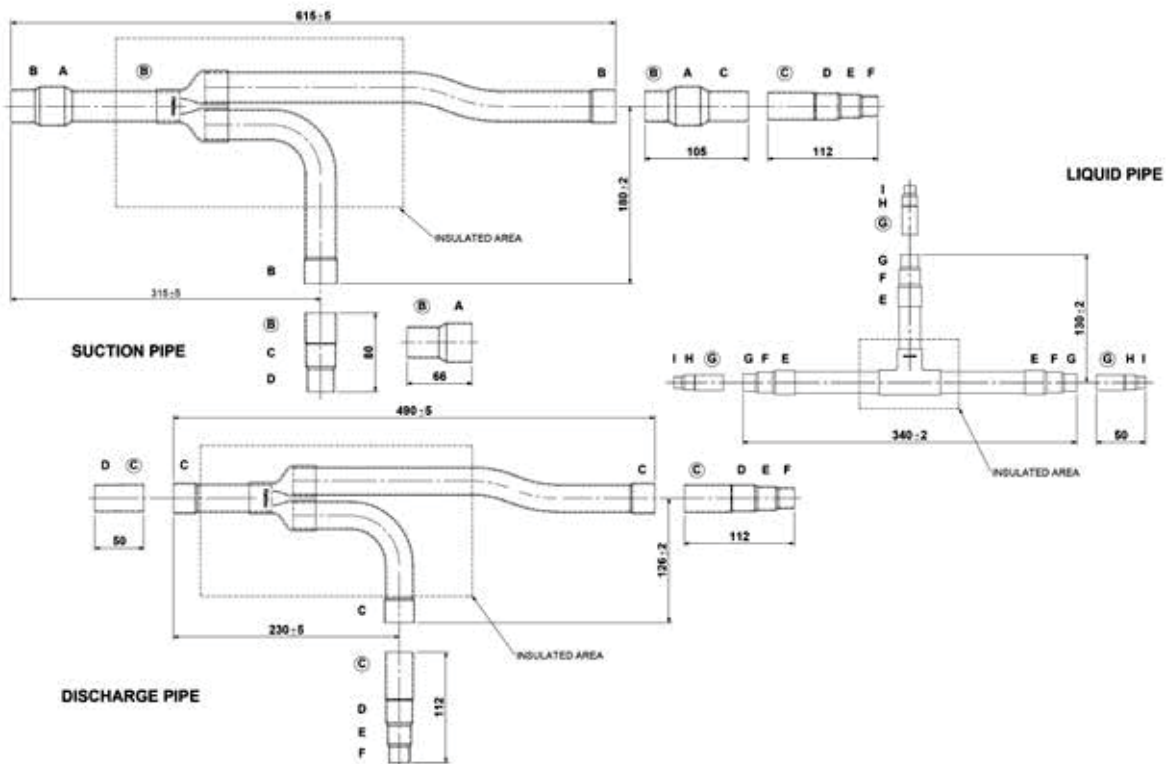

All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.

3. CZ-P224BH2

Use: For indoor unit (Capacity after distribution joint is 22.4kW or less.)

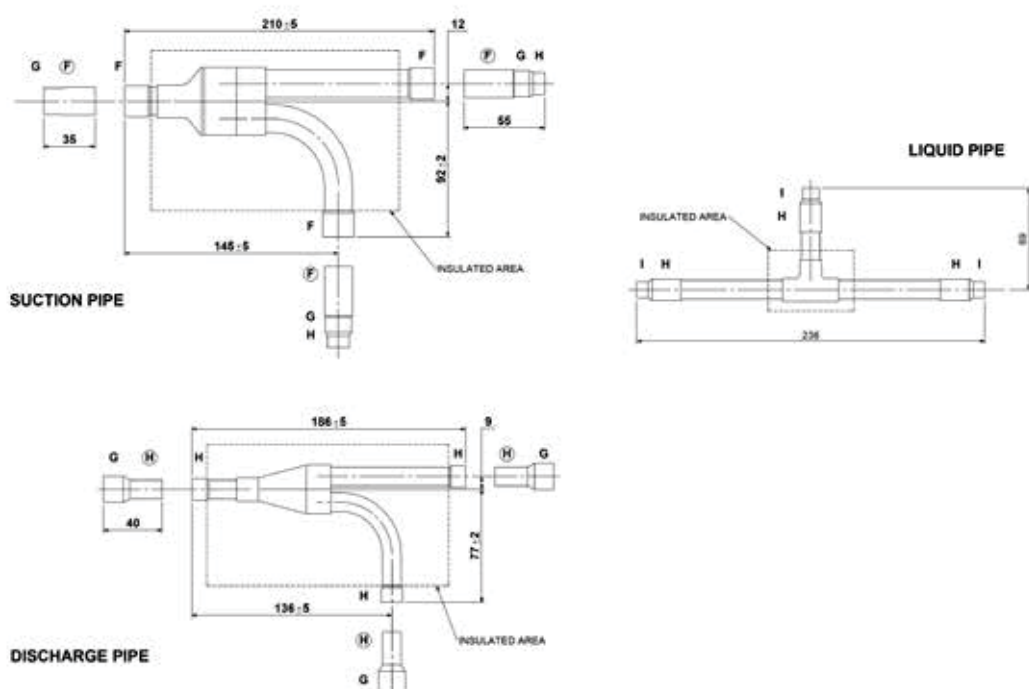


All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.

Refrigerant Branch Pipes (optional accessories) for 3-Way MF2 Series

4. CZ-P680BH2

Use: For indoor unit (Capacity after distribution joint is greater than 22.4kW and no more than 68.0kW.)

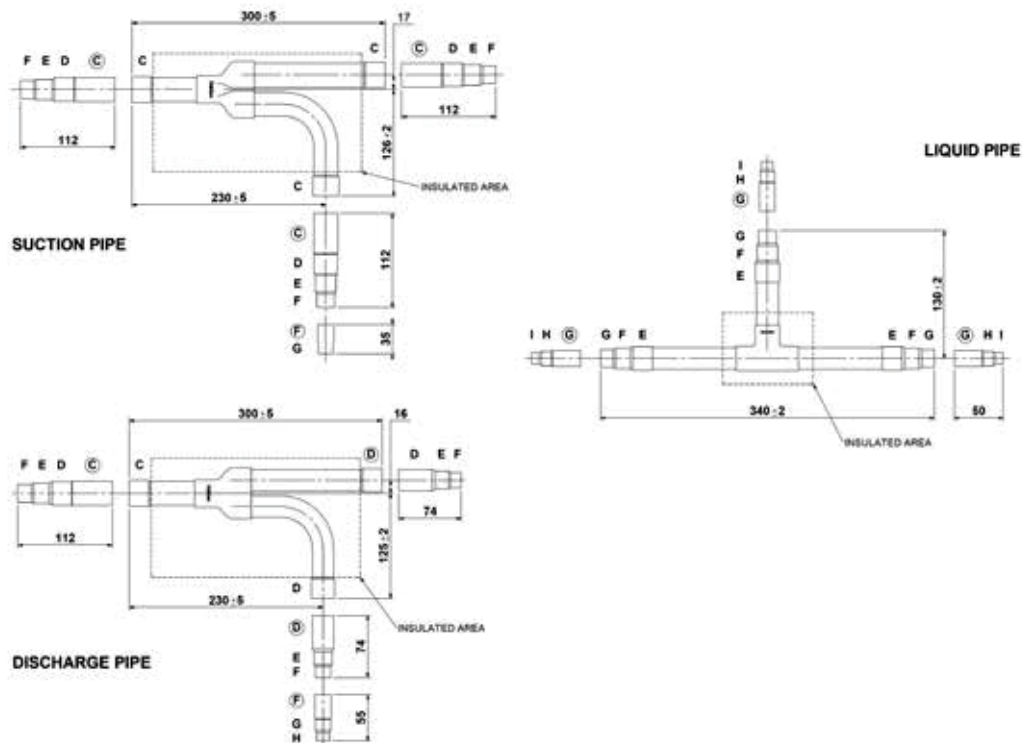


All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.


5. CZ-P1350BH2

Use: For indoor unit (Capacity after distribution joint is greater than 68.0kW and no more than 118.0kW.)


SUCTION PIPE

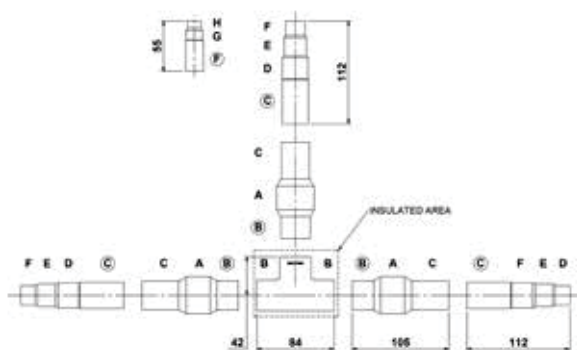

DISCHARGE PIPE

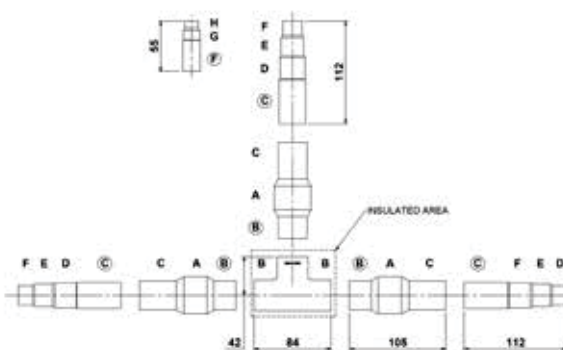

LIQUID PIPE

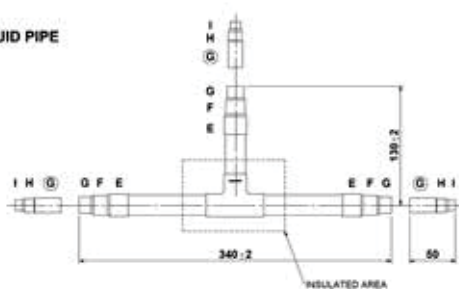

All measurements are in mm. Size of connection points on each part shown are inside diameters of piping.





For small-scale commercial and residential use

2-PIPE Mini-FSV LE1/ LE2 Series

COOLING OR HEATING TYPE 1 PHASE*1

COOLING OR HEATING TYPE 3 PHASE*2



Panasonic 2-PIPE Mini-FSV, is a 2-pipe heat pump specifically designed for the most demanding applications. Mini-FSV is available in 5 sizes with cooling / heating capacities ranging from 12.1kW to 25.0kW with up to 13* connectable indoor units (*22.4kW /25.0kW only).

*1 LE2 only

*2 12.1 /14.0 /15.5 /22.4 /25.0kW LE1 only

LE1 Series 12.1kW - 25.0kW



Cooling or Heating Type

- High external static pressure up to 35Pa (22.4 /25.0kW only)
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C WB
- Maximum number of connectable indoor units : 12.1kW: 6, 14.0kW: 8, 15.5kW: 9, 22.4 /25.0kW: 13
- Diversity ratio 50-130%
- DC inverter technology combined with R410A for excellent efficiency
- Actual piping length: Up to 120m (12.1 /14.0 /15.5kW) Up to 150m (22.4 /25.0kW)
- Max. piping length: Up to 150m (12.1 /14.0 /15.5kW) Up to 300m (22.4 /25.0kW)
- System difference of elevation: 50m/40m (outdoor above/below)
- Difference in elevation between indoor units: 15m
- Demand response (Peak cut) by optional parts
- Full range of indoor units and control options
- Auto restart from outdoor unit
- Anti-corrosion series available (22.4 /25.0kW only)
- Demand response (Peak cut) by optional parts 
- Suitable for R22 renewal projects 

(refer to Technical Guide for further details)

LE2 Series 12.1kW - 15.5kW

Cooling or Heating Type

- High external static pressure up to 35Pa
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C WB
- Refrigerant chargeless up to 50m
- Extraordinary energy saving - EER 4.50 /COP: 5.19 (12.1kW only)
- Maximum number of connectable indoor units : 9 (15.5kW only)
- Diversity ratio 50-130%
- DC inverter technology combined with R410A for excellent efficiency
- Actual piping length: Up to 150m
- Max. piping length: Up to 180m
- System difference of elevation: 50m/40m (outdoor above/below)
- Difference in elevation between indoor units: 15m
- One ampere starting current
- Full range of indoor units and control options
- Auto restart from outdoor unit
- Anti-corrosion series available
- Demand response (Peak cut) by optional parts 
- Suitable for R22 renewal projects 

(refer to Technical Guide for further details)






12.1kW / 14.0kW /15.5kW - LE2



12.1kW / 14.0kW /15.5kW - LE1

Advanced Technology for Energy Saving

2-pipe Mini-FSV LE1 & LE2 Series

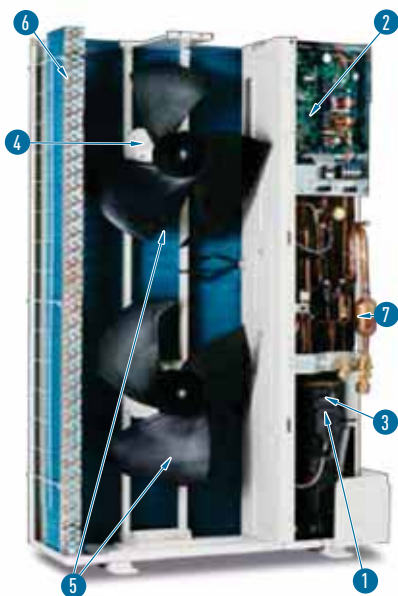

1 Panasonic Inverter Compressor	A large-capacity inverter compressor has been introduced. The inverter compressor is superior in performance with improved partial-load capacity.
2 Printed Circuit Board	2 PCB make for easier maintenance.
3 Accumulator	A large accumulator has been introduced to maintain compressor reliability due to the increased refrigerant quantity, which allows an extended max piping length. Furthermore, refrigerant pressure loss is reduced, contributing to an improved operating efficiency.
4 DC Fan Motor	Checking load and outside temperature, the DC motor is controlled for optimum air volume.
5 Newly Designed Fan	The newly designed fan blades have been developed to inhibit air turbulence and to increase efficiency. As fan diameter has been increased to 540mm, the air volume has been increased by 27% whilst maintaining the same sound level.
6 Heat Exchanger & Copper Tubes	The heat exchanger size and the copper tube sizes within the heat exchanger have been redesigned to increase efficiency.
7 Oil Separator	A new centrifugal separator has been adopted to improve oil separation efficiency and reduce refrigerant pressure loss.

Note: Only 22.4kW /25.0kW

2-PIPE Mini-FSV LE1 & LE2 Series

Installation



High external static pressure
35Pa*

*LE2, 22.4kW & 25.0kW only


High external static pressure 35Pa*

Also, since Mini FSV LE Series is a single unit, it is possible to install the unit in more various places compared to the Single Split system.



Previous Model - Low Pressure

When the pressure is low, hot air will accumulate in the unit thus affecting its work performance, and of the unit above it as well.

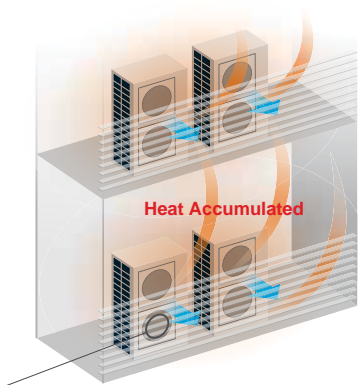

Previous Fan


High electrostatic pressure disrupted the airflow of the previous fan, lowering the air pressure and preventing hot air from being discharged far enough.



LE Series - High Pressure

With a high pressure of 35Pa*, hot air is sent further away preventing overheating inside the outdoor unit enclosure.

*LE2, 22.4kW & 25.0kW only

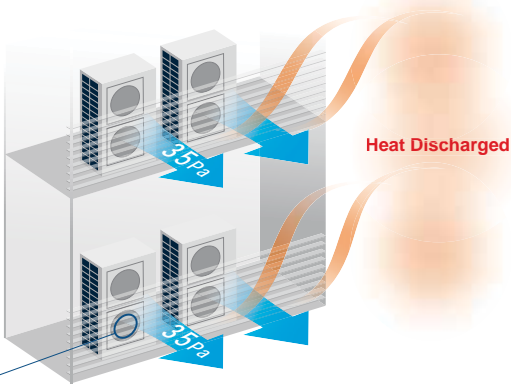

LE Series Fan

The new LE Series fan has ribs extending near the blade tips, in a structure that resists deformation. During high electrostatic pressure, this blade shape suppresses disruptions in the airflow, and a high air pressure of 35 Pa discharges the hot air a sufficient distance.

*LE2, 22.4kW & 25.0kW only




Increased piping length for greater design flexibility

Adaptable to various building types and sizes

Actual piping length **150m**
(equivalent piping length **175m**)


Max. total piping length: 300m



LE 1
22.4 / 25.0kW

Actual piping length **150m**
(equivalent piping length **175m**)

Max. total piping length: 180m



LE 2

*1: 40m if the outdoor unit is below the indoor unit.

Refrigerant chargeless up to 50m


Up to 50m of piping without additional gas charging makes installation flexible, easy and hassle-free.

A 50m piping length is sufficient for most residential and small business buildings. When the total piping length exceeds 50m, additional refrigerant charge is required.

Chargeless
Max. total piping length: 50m

Charge
Max. total piping length: 180m
(Actual length: 150m)

[Sample piping lay-out]



Compact & flexible design

Also, since Mini FSV LE Series is a single unit, it is possible to install the unit in more various places compared to the Single Split system.

LE 1 LE 2



Single Split



Mini-FSV

LE 2


Short Height 996mm

Short height 996mm

In addition to raising efficiency, we have made the outdoor unit more compact. It can now be installed in places that were previously too small.



Can be installed in the small space

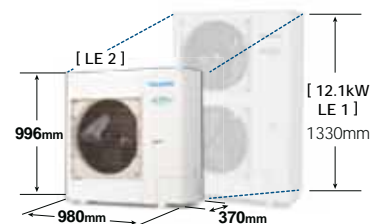


2-PIPE Mini-FSV LE1 & LE2 Series



Energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, and new heat exchanger design.

Energy Saving Technology

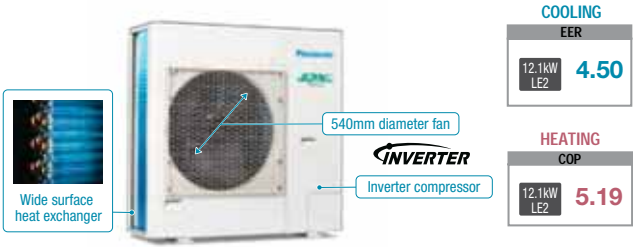

High efficiency

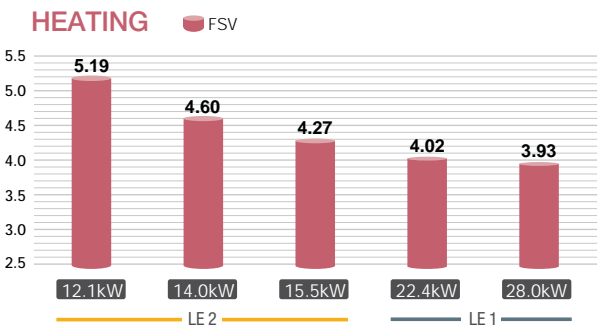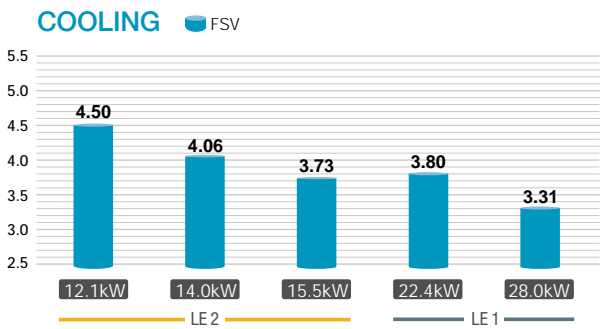


Flexible demand response with the optional terminal block

Demand response

Featuring inverter control technology, all Panasonic Mini FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.

*Terminal block parts to be supplied separately. Please ask your dealer.

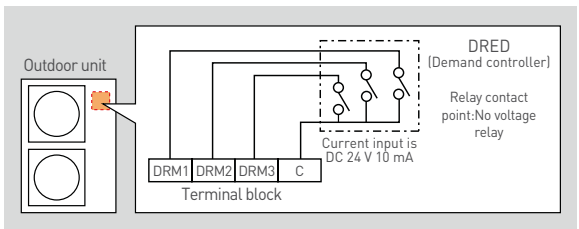


Flexible demand response with the CZ-CAPDC2*1

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

* Demand timer setting for high spec remote controller is available.

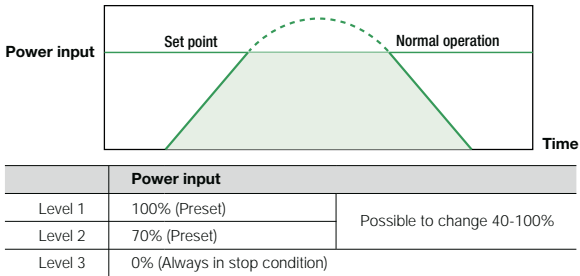


Wide operating range

Cooling operation is possible even when outdoor temperature is as low as -10°C DB.

- Cooling operation is possible even when outdoor temperature is as high as 46°C DB.
- Heating operation is possible even when outdoor temperature is as low as -20°C WB.


The remote controller temperature can be set from 18°C up to 30°C (Cooling), 16°C up to 30°C (Heating)

* Depending on the type of remote controller.

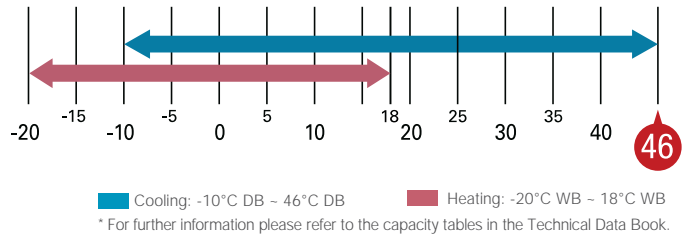

Blue fin condenser


The anti-corrosion Blue Fin treatment of the heat exchanger provides greater resistance against corrosion. All models are equipped with Blue Fin condenser.



Anti-corrosion outdoor unit

Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.

Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer. * Specific model with suffix "E" has this treatment.

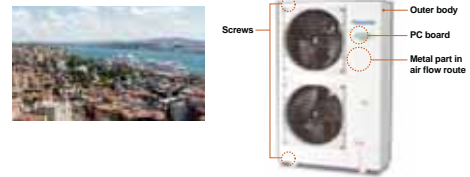


Quiet operation mode

- Quiet operation mode reduces outdoor unit operating sound down to 7dB than rating. (LE2, 22.4 /25.0kW only)
 - 3-step set point is available. (LE2, 22.4 /25.0kW only)
 - External input signal is also available. (LE2, 22.4 /25.0kW only)
 - Silent mode reduces outdoor unit operating sound up to 5dB. (12.1 /14.0 /15.5kW LE1 only)
- * Timer setting of quiet operation mode is available by Deluxe Wired Controller only (CZ-RTC5A).



Up to 13* indoor units connectable

An expansion from Panasonic FSV line up, the mini FSV is compatible with the same indoor units and controls as the rest of the FSV range.

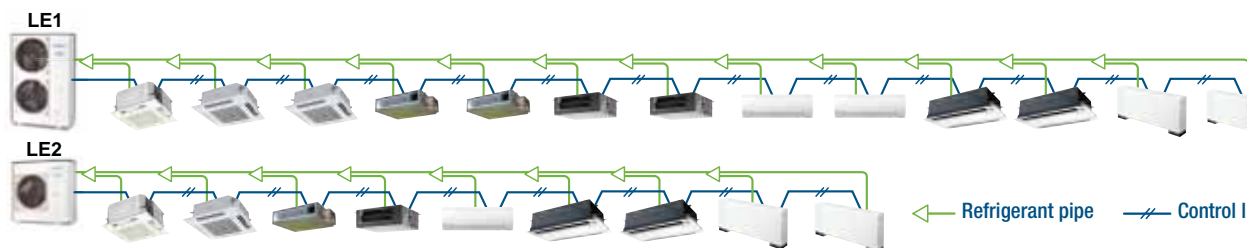

* 22.4 /25.0kW only

Above diagrams are for illustration only, for further information please refer to the capacity tables in the Technical Data Book.

2-PIPE Mini-FSV LE1 Series


kW			12.1	14.0	15.5
Model name			U-4LE1R8	U-5LE1R8	U-6LE1R8
Power supply			415V-3phase, 50Hz	415V-3phase, 50Hz	415V-3phase, 50Hz
Capacity	Cooling	kW	12.10	14.00	15.50
		BTU/h	41,300	47,800	52,900
	Heating	kW	12.50	16.00	18.00
		BTU/h	42,700	54,600	61,400
EER/COP	Cooling	W/W	3.76	3.68	3.41
	Heating	W/W	4.21	3.91	3.59
Dimensions (H/W/D)		mm	1,330 x 940 x 340 (410")	1,330 x 940 x 340 (410")	1,330 x 940 x 340 (410")
Net weight		kg	104	104	104
Electrical ratings	Cooling	Running current	A	5.1	5.9
		Power input	kW	3.22	3.80
	Heating	Running current	A	4.7	7.5
		Power input	kW	2.97	4.09
Starting current		A	1	1	1
Air flow rate		m ³ /min	95	104	104
		L/s	1,583	1,733	1,733
Refrigerant amount at shipment		kg	3.50	3.50	3.50
Piping connection	Gas pipe	mm (inches)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ambient temperature operating range			Cooling: -10°CDB~-+46°CDB, Heating: -20°CWB~-+18°CWB	Cooling: -10°CDB~-+46°CDB, Heating: -20°CWB~-+18°CWB	Cooling: -10°CDB~-+46°CDB, Heating: -20°CDB~-+24°CDB
Sound pressure level	Normal mode	dB(A)	52/54: Cooling/Heating	53/55: Cooling/Heating	54/57: Cooling/Heating
	Silent mode	dB(A)	47/49: Cooling/Heating	48/50: Cooling/Heating	49/52: Cooling/Heating
Sound power level	Normal mode	dB(A)	70/72: Cooling/Heating	71/73: Cooling/Heating	72/75: Cooling/Heating

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB

* As a foot print.

Dimensions


U-4LE1R8 / U-5LE1R8 / U-6LE1R8

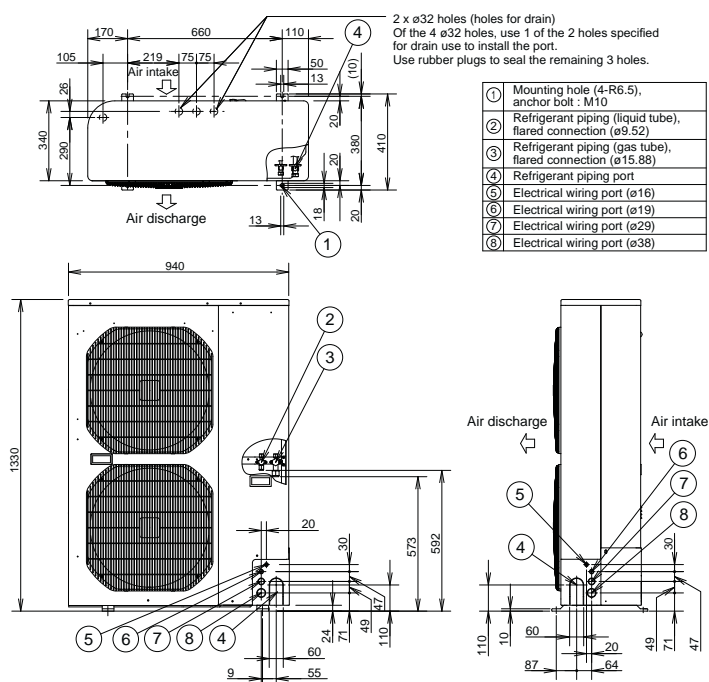

kW			22.4		25.0		
Model name			U-8LE1R8		U-10LE1R8		
Power supply			400V/415V-3phase, 50Hz		400V/415V-3phase, 50Hz		
Voltage			400V	415V	400V	415V	
Capacity	Cooling	kW	22.4		25.0		
		BTU/h	76,500		85,300		
	Heating	kW	25.0		28.0		
		BTU/h	85,300		95,600		
EER/COP	Cooling	W/W	3.80		3.31		
	Heating	W/W	4.02		3.93		
Dimensions (H/W/D)		mm	1,500 x 980 x 370		1,500 x 980 x 370		
Net weight		kg	132		133		
Electrical ratings	Cooling	Running current	A	9.15	8.80	11.70	11.30
		Power input	kW	5.89	5.89	7.55	7.55
	Heating	Running current	A	9.65	9.30	11.1	10.7
		Power input	kW	6.22	6.22	7.13	7.13
Starting current		A	1		1		
Air flow rate		m ³ /min	150		160		
		L/s	2,500		2,666		
Refrigerant amount at shipment		kg	R410A 6.30		R410A 6.60		
Piping connection	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)		Ø22.22 (Ø7/8)		
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)		Ø9.52 (Ø3/8)		
Ambient temperature operating range			Cooling:-10°CDB~-+46°CDB, Heating:-20°CWB~-+18°CWB		Cooling:-10°CDB~-+46°CDB, Heating:-20°CWB~-+18°CWB		
Sound pressure level (Cooling)	Normal mode	dB(A)	60		62		
	Silent mode	dB(A)	53		55		
Sound power level (Cooling)	Normal mode	dB(A)	81		83		
GLOBAL REMARKS	Rated conditions:		Cooling	Heating	* As a foot print. ** High durable model (with suffix "E") has same specifications.		
	Indoor air temperature		27°C DB/19°C WB	20°C DB			
	Outdoor air temperature		35°C DB	7°C DB/6°C WB			

Dimensions




U-8LE1R8 / U-10LE1R8

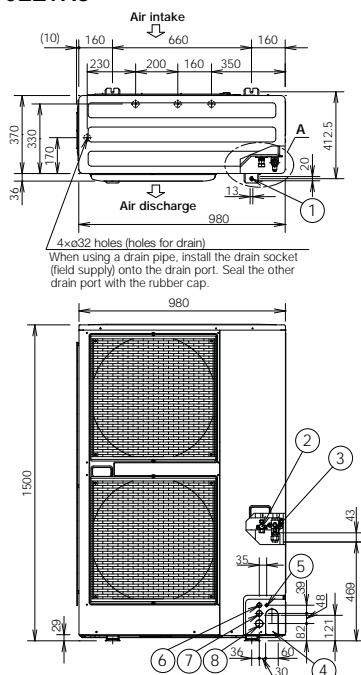

- ① Mounting hole (4-R6.5), anchor bolt: M10.
- ② Refrigerant tubing (liquid tube), flared connection (ø9.52) for 8-10 HP finally.
- ③ Refrigerant tubing (gas tube), flared connection (ø19.05).
- ④ Refrigerant tubing port.
- ⑤ Electrical wiring port (ø13).
- ⑥ Electrical wiring port (ø22).
- ⑦ Electrical wiring port (ø27).
- ⑧ Electrical wiring port (ø35).

For U-10LE1R8

The tubing of the gas main has a diameter of ø22.22, but the connection to the service valve of the outdoor unit has a diameter of ø19.05, so a flare has to be used. Consequently, be sure to use the enclosed joint tube B and joint tube A in making connections (brazing).

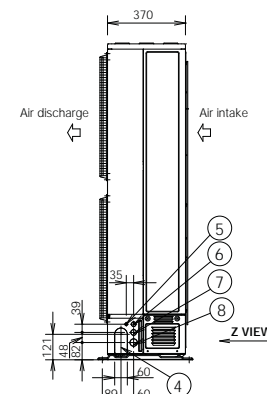


Unit: mm

2-PIPE Mini-FSV LE2 Series


kW			12.1		14.0		15.5		
Model name			U-4LE2R5		U-5LE2R5		U-6LE2R5		
Power supply			230/240V/1-phase/50Hz		230/240V/1-phase/50Hz		230/240V/1-phase/50Hz		
Voltage			230V	240V	230V	240V	230V	240V	
Capacity	Cooling	kW	12.1		14.0		15.5		
		BTU/h	41,300		47,800		52,900		
	Heating	kW	12.5		16.0		16.5		
		BTU/h	42,700		54,600		56,300		
EER/COP	Cooling	W/W	4.50		4.06		3.73		
	Heating	W/W	5.19		4.60		4.27		
Dimensions (H/W/D)		mm	996 x 980 x 370		996 x 980 x 370		996 x 980 x 370		
Net weight		kg	106		106		106		
Electrical ratings	Cooling	Running current	A	12.70	12.20	16.30	15.60	19.40	18.60
		Power input	kW	2.69	2.69	3.45	3.45	4.15	4.15
	Heating	Running current	A	11.60	11.20	16.60	15.90	18.20	17.50
		Power input	kW	2.41	2.41	3.48	3.48	3.86	3.86
Starting current		A	1		1		1		
Air flow rate		m ³ /min	69		72		74		
		L/s	1,150		1,200		1,233		
Refrigerant amount at shipment		kg	R410A 6.70		R410A 6.70		R410A 6.70		
Piping connection	Gas pipe	mm (inches)	Ø15.88 (Ø5/8)		Ø15.88 (Ø5/8)		Ø15.88 (Ø5/8)		
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)		Ø9.52 (Ø3/8)		Ø9.52 (Ø3/8)		
Ambient temperature operating range			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB		Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB		Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB		
Sound pressure level (Cooling)	Normal mode	dB(A)	52.0		53.0		54.0		
	Silent mode	dB(A)	45.0		46.0		47.0		
Sound power level (Cooling)	Normal mode	dB(A)	69.0		71.0		73.0		
GLOBAL REMARKS	Rated conditions:		Cooling	Heating	* As a foot print. ** High durable model (with suffix "E") has same specifications.				
	Indoor air temperature		27°C DB/19°C WB	20°C DB					
	Outdoor air temperature		35°C DB	7°C DB/6°C WB					

Dimensions




U-4LE2R5 / U-5LE2R5 / U-6LE2R5

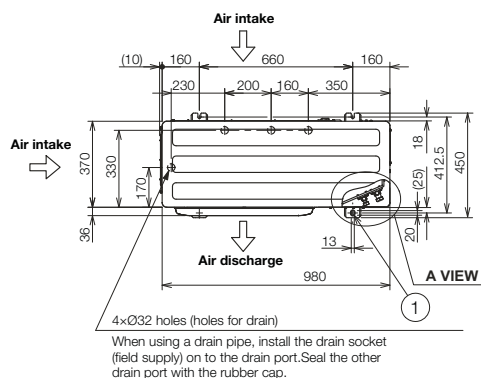

Mounting hole (4-R6.5), anchor bolt : M10
Refrigerant tubing (liquid tube), flared connection (Ø9.52)
Refrigerant tubing (gas tube), flared connection (Ø15.88)
Refrigerant tubing port
Electrical wiring port (Ø13)
Electrical wiring port (Ø22)
Electrical wiring port (Ø27)
Electrical wiring port (Ø35)



A VIEW

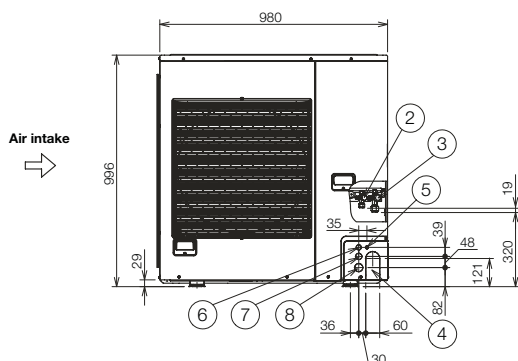

Z VIEW

Unit: mm





Distribution Joint Kits


CZ-P160BK2

Use: For indoor unit (Capacity after distribution joint is 22.4kW or less.)


GAS PIPING

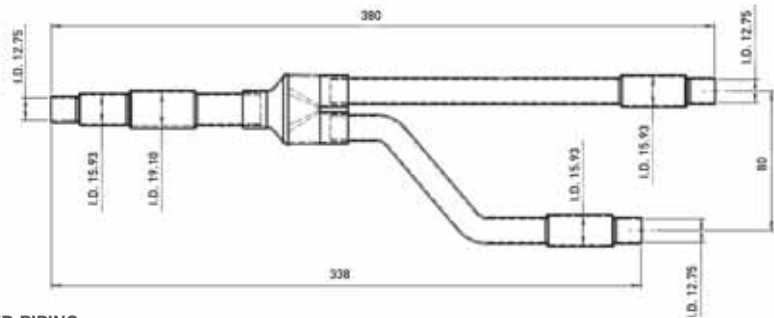


Qty: 1



Qty: 2




Qty: 2



Qty: 1

LIQUID PIPING

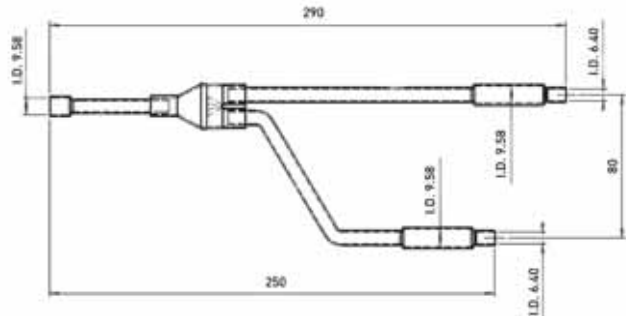

All measurements are in mm. Size of connection point on each part shown is inside diameters of piping.

Wiring System Diagrams


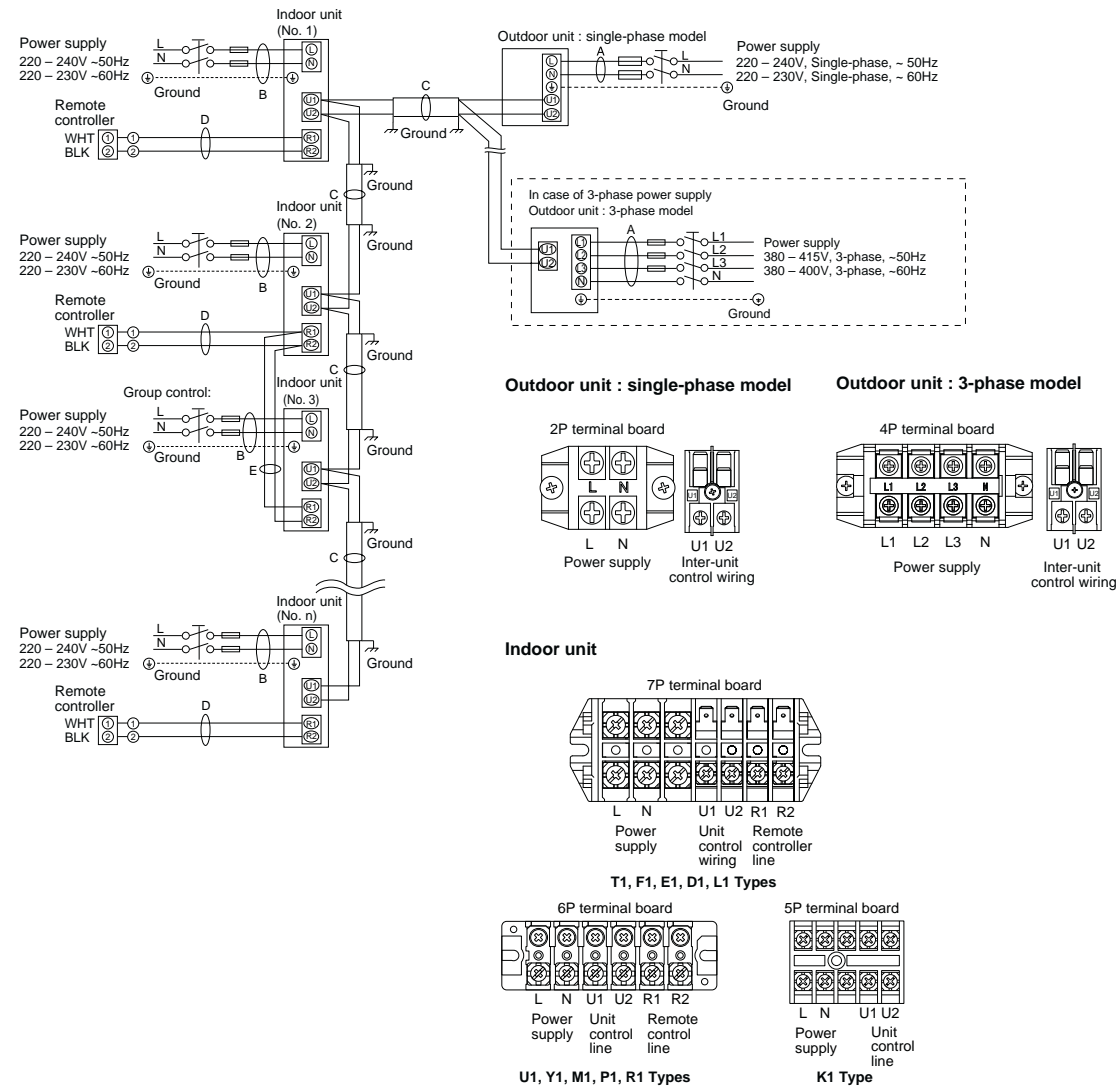


Fig. 2-1

Piping design

Select the installation location so that the length and size of refrigerant piping are within the allowable range shown in the figure below.

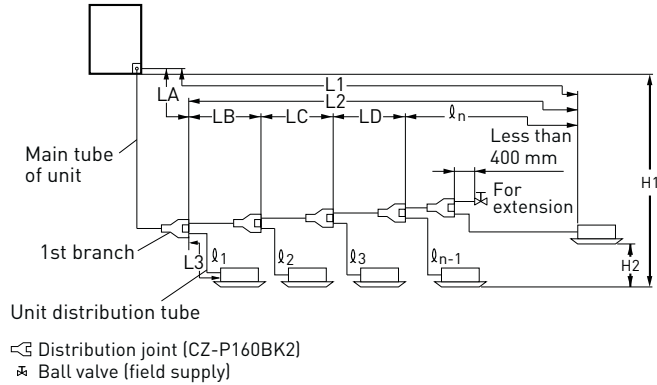

Ranges that Apply to Refrigerant Piping Lengths and to Differences in Installation Heights

Items	Marks	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual length 120
			Equivalent length 140
	$\Delta L (L2 - L3)$	Difference between max. length and min. length from the No.1 distribution joint	40
	$l_1, l_2 \dots l_n$	Max. length of each distribution tube	30
	$l_1, l_2 \dots l_{n-1} + L1$	Total max. piping length including length of each distribution tube (only narrow piping)	150
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	50
		When outdoor unit is installed lower than indoor unit	40
	H2	Max. difference between indoor units	15

L = Length, H = Height

Piping Size

Main Piping Size (LA)

	12.1kW	14.0kW	15.5kW
System kilowatts	12.1	14.0	15.5
Gas piping mm (inches)	ø15.88 (ø5/8)		ø19.05 (ø3/4)
Liquid piping mm (inches)	ø9.52 (ø3/8)		

Note :If the system consists of only one indoor unit with an outdoor 12.1 kW, the main tube of the unit (LA) should be ø19.05. Convert ø19.05 to ø15.88 using a reducer (field supply) close to the indoor unit and then make the connection.

Indoor Unit Piping Connection (l1, l2...ln-1)

Indoor unite type	22	28	36	45	56	73	90	106	140	160
Gas piping mm (inches)	ø12.7 (ø1/2)					ø15.88 (ø5/8)				
Liquid piping mm (inches)	ø6.35 (ø1/4)					ø9.52 (ø3/8)				

Main Piping Size After Distribution (LB, LC...)

Total capacity after distribution	Below kW		7.1	12.1	14.0	15.5
	Over kW		7.1			
Piping size	Gas piping	(mm)	ø12.7	ø15.88		ø19.05
		(inches)	ø1/2	ø5/8		ø3/4
	Liquid piping	(mm)	ø9.52			
		(inches)	ø3/8			

kW = kilowatts

Note :In case the total capacity of connected indoor units exceeds the total capacity of the outdoor units, select the main piping size for the total capacity of the outdoor units.

System Limitations

Outdoor units	12.1kW	14.0kW	15.5kW
Number of max. connectable indoor units	6	8	9
Max. allowable indoor/outdoor capacity ratio	50 - 130%		

kW = kilowatts

Indoor Units

Wide choice of models depending on the indoor requirements

ECONAVI sensor



Providing outstanding energy-saving performance, Panasonic's inverter VRF System can be connected to ECONAVI to detect when energy is being wasted. ECONAVI senses the presence or absence of people and the level of activity in each area of an office. When unnecessary heating or cooling is detected, indoor units are individually controlled to match office conditions for energy-saving operation.



Detection of the level of activity enables optimum power saving

Activity or absence of people at their desks and the level of activity in the office are detected in real time. Cooling or heating is automatically adjusted for optimum operation required to lower power consumption.



Sensor is remotely located to maximise the energy saving effect

Pillars, walls, cabinets and other fittings obstruct the sensors, reducing the area of detection and lowering the energy-saving effect. Taking into consideration blind spots, Panasonic enables the optimum layout for sensors in any office.



ECONAVI Sensor
CZ-CENSC1

Deluxe wired remote controller



Large 3.5" full-dot LCD with white LED backlight

Characters and icons are clearly displayed for improved visibility. The display is also large enough to provide a wide range of information for easy confirmation of operation conditions.




Stylish, easy-to-use touch key design

The elegant, flat design features large touch keys in a simple layout enabling easy, intuitive operation.




Key Indoor Units Equipped DC Motors

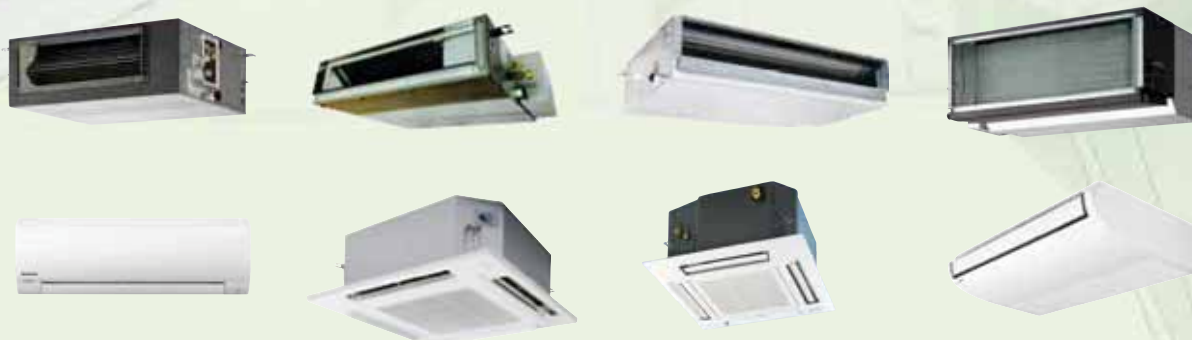

All ducted series / F2, M1, Z1, E2, E1, H1 type

Discharge air temperature control

Smart sensors control discharge air temperature for precise room temperature control. This makes it possible to reduce cold drafts during heating operation.

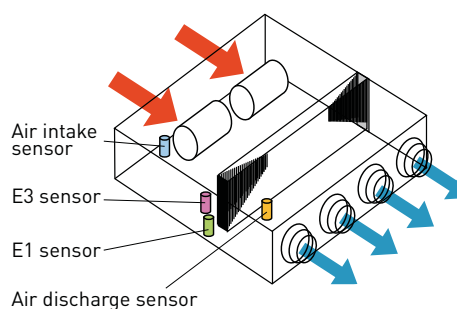

Wall mounted / K1, K2 type



Compact design with flat surface enables seamless match with any type of room interior

Noise reducing external valve kit

To reduce noise level of expansion valve.
(optional accessory)



CZ-P56SVK2 (for 22 - 56 type)

CZ-P160SVK2 (for 73 - 106 type)

Remote temperature sensor






































































CZ-CSRC3
















































































































































- This is a remote sensor which can be used with indoor units. Use it to detect the room temperature when no remote controller sensor or body sensor is used (connection to a system without a remote controller is possible).
- For joint use with a remote control switch, use the remote control switch as main remote controller.

FSV Indoor Units Range

Wide choice of models depending on the indoor requirements

Class	22	28	36	45	56	60	73	90	
Capacity	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	
kW	2.2/2.5	2.8/3.2	3.6/4.2	4.5/5.0	5.6/6.3	6.0/7.1	7.3/8.0	9.0/10.0	
BTU/h	7,500/8,500	9,600/11,000	12,000/14,000	15,000/17,000	19,000/21,000	20,400/24,200	25,000/27,000	30,000/34,000	
Type									
F2 type ECONAVI Mid Static Ducted	 S-22MF2E5A	 S-28MF2E5A	 S-36MF2E5A	 S-45MF2E5A	 S-56MF2E5A	 S-60MF2E5A	 S-73MF2E5A	 S-90MF2E5A	
M1 type ECONAVI Slim Low Static Ducted	 S-22MM1E5A	 S-28MM1E5A	 S-36MM1E5A	 S-45MM1E5A	 S-56MM1E5A				
Z1 type ECONAVI Slim & Narrow Ducted Series	 S-22MZ1H4A	 S-28MZ1H4A	 S-36MZ1H4A	 S-45MZ1H4A	 S-56MZ1H4A	 S-60MZ1H4A	 S-73MZ1H4A		
E2 type High Static Ducted / Energy Saving High-Fresh Air Ducted									
E1 type High Static Ducted								 S-90ME1R5A	
K2 type ECONAVI Wall Mounted	 S-22MK2E5A	 S-28MK2E5A	 S-36MK2E5A	 S-45MK2E5A	 S-56MK2E5A		 S-73MK2E5A		
U2 type ECONAVI 4-Way Cassette Panel No. CZ-KPU3A	 S-22MU2E5A	 S-28MU2E5A	 S-36MU2E5A	 S-45MU2E5A	 S-56MU2E5A	 S-60MU2E5A	 S-73MU2E5A	 S-90MU2E5A	
Y2 type ECONAVI 4-Way Mini Cassette Panel No. CZ-KPY3A	 S-22MY2E5A	 S-28MY2E5A	 S-36MY2E5A	 S-45MY2E5A	 S-56MY2E5A				
L1 type 2-Way Cassette Panel No. CZ-02KPL2 Panel No. CZ-03KPL2 (Only for S-73ML1E5)	 S-22ML1E5	 S-28ML1E5	 S-36ML1E5	 S-45ML1E5	 S-56ML1E5		 S-73ML1E5		
D1 type 1-Way Cassette Panel No. CZ-KPD2		 S-28MD1E5	 S-36MD1E5	 S-45MD1E5	 S-56MD1E5		 S-73MD1E5		
T2 type ECONAVI Ceiling			 S-36MT2E5A	 S-45MT2E5A	 S-56MT2E5A		 S-73MT2E5A		
P1 type Floor Standing	 S-22MP1E5	 S-28MP1E5	 S-36MP1E5	 S-45MP1E5	 S-56MP1E5		 S-71MP1E5		
R1 type Concealed Floor Standing	 S-22MR1E5	 S-28MR1E5	 S-36MR1E5	 S-45MR1E5	 S-56MR1E5		 S-71MR1E5		

* Only for High Static Ducted

	106	112	140	160	180	224	280	Wireless remote control		
	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Type with built-in sensor	Type with separately installed sensor	Functions
	10.6/11.4 36,000/39,000	11.2/12.5 38,200/42,700	14.0/16.0 47,800/54,600	16.0/18.0 54,600/61,500	18.0/20.0 61,400/68,200	22.4/25.0 76,400/85,300	28.0/31.5 95,500/107,500			
	 S-106MF2E5A		 S-140MF2E5A	 S-160MF2E5A					●	 self-diagnosing  Auto fan  Auto restart  Auto fan  DP  DP  DC motor  DC motor  Mild dry  Mild dry
									●	 self-diagnosing  Auto fan  Auto restart  Auto fan  DP  DP  DC motor  DC motor  Mild dry  Mild dry
									●	 self-diagnosing  Auto fan  Auto restart  Auto fan  DC motor  DC motor  Mild dry  Mild dry
					 S-180ME2E5 *	 S-224ME2E5	 S-280ME2E5			 self-diagnosing  Auto fan  Auto restart  Auto fan  DP  DP  DC motor  DC motor  Mild dry (High Static Ducted)  Mild dry (High Static Ducted)
		 S-112ME1R5A	 S-140ME1R5A	 S-160ME1R5A					●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Mild dry  Mild dry  Auto restart  Auto restart
	 S-106MK2E5A							●	●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Air swing  Air swing  DC motor  DC motor  Mild dry  Mild dry  Auto flap  Auto flap
	 S-106MU2E5A		 S-140MU2E5A	 S-160MU2E5A				●	●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Air swing  Air swing  DP  DP  DC motor  DC motor  Mild dry  Mild dry  Auto flap  Auto flap
								●	●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Air swing  Air swing  DP  DP  DC motor  DC motor  Mild dry  Mild dry  Auto flap  Auto flap
								●	●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Air swing  Air swing  DP  DP  DC motor  DC motor  Mild dry  Mild dry  Auto flap  Auto flap
	 S-106MT2E5A		 S-140MT2E5A					●	●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Air swing  Air swing  DC motor  DC motor  Mild dry  Mild dry  Auto flap  Auto flap
									●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Mild dry  Mild dry  Auto restart  Auto restart
									●	 self-diagnosing  Auto fan  Auto restart  Auto fan  Mild dry  Mild dry  Auto restart  Auto restart

 Self-diagnosing function
  Automatic fan operation
  Mild dry
  Intelligent auto flap control
  Automatic restart function for power failure
  Air swing
  Built-in drain pump
  DC motor

F2_{TYPE} Mid Static Ducted



The new F2 type is designed specifically for applications requiring fixed square ducting. An anti-mould filter is equipped as standard.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Automatic
Restart
Function




Built-in Drain
Pump

Technical focus

- Variable external static pressure control
- Industry-leading low sound levels from 25dB (A)
- Built-in drain pump provides 702mm lift
- Easy to install and maintain
- Air off sensor avoids cold air drafts during heating operation
- Configurable air temperature control
- Anti-mould washable filters included

Variable external static pressure control


Optimal airflow set-up is possible depending on ducting design and conditions.

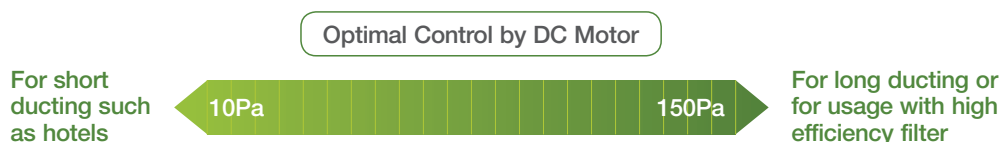

* Please refer to technical databook for detail.


System example

An inspection port (450mm x 450mm or larger) is required at the lower side of the indoor unit body.

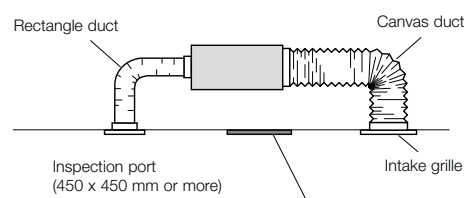

More powerful drain pump

Using a high-lift drain pump, drain piping can be elevated up to 702mm from the base of the unit.

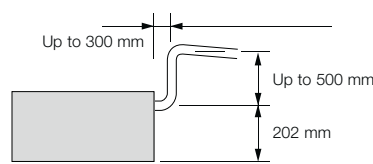



S-60MF2E5A / S-73MF2E5A / S-90MF2E5A



S-106MF2E5A / S-140MF2E5A / S-160MF2E5A



S-22MF2E5A / S-28MF2E5A / S-36MF2E5A / S-45MF2E5A / S-56MF2E5A



ECONAVI ready



CZ-CENSC1



CZ-RTC5A


For all indoor units
CZ-RWSK2 +
CZ-RWSC3

Built-in Drain pump (DC motor pump)

Standardised height of 290mm for all models

Height standardisation enables easy and uniform installation for models with different capacities.

External electrical equipment box makes maintenance easy

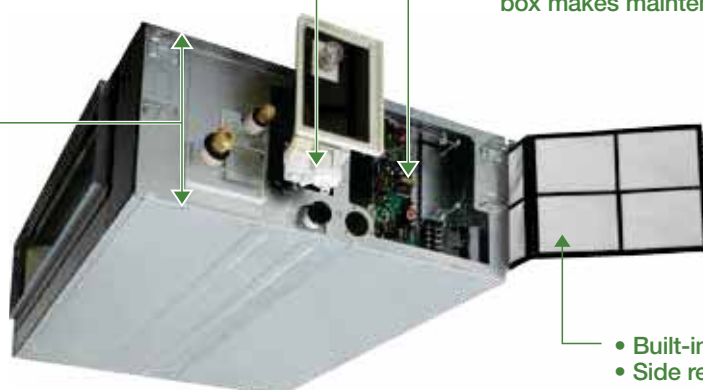


- Built-in filter
- Side removable filter

Discharge air temperature control


- Possible to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

Before spec-in, please consult with an authorised Panasonic dealer.



V-shaped heat exchanger

To improve heat exchange efficiency, an original V-shaped heat exchanger was developed incorporating a conventional high-efficiency slit fan and high-efficiency grooved heat transfer tubes. This increases the heat exchange surface area.



Increases heat exchange surface area




GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

76

S-60MF2E5A	S-73MF2E5A	S-90MF2E5A	S-106MF2E5A	S-140MF2E5A	S-160MF2E5A
220/230/240V, 1 phase - 50/60Hz					
6.0	7.3	9.0	10.6	14.0	16.0
20,400	25,000	30,000	36,000	47,800	54,600
7.1	8.0	10.0	11.4	16.0	18.0
24,200	27,000	34,000	39,000	54,600	61,500
0.120/0.120/0.120	0.120/0.120/0.120	0.135/0.135/0.135	0.195/0.195/0.195	0.215/0.215/0.215	0.225/0.225/0.225
0.120/0.120/0.120	0.120/0.120/0.120	0.135/0.135/0.135	0.200/0.200/0.200	0.210/0.210/0.210	0.225/0.225/0.225
0.91/0.89/0.87	0.91/0.89/0.87	0.99/0.97/0.95	1.35/1.30/1.27	1.48/1.44/1.39	1.55/1.50/1.47
0.91/0.89/0.87	0.91/0.89/0.87	0.99/0.97/0.95	1.37/1.34/1.29	1.46/1.42/1.38	1.55/1.50/1.46
Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
1,260/1,140/900	1,260/1,140/900	1,500/1,380/1,140	1,920/1,620/1,320	2,040/1,740/1,380	2,160/1,860/1,500
350/317/250	350/317/250	417/383/317	533/450/367	567/483/383	600/517/417
0.124	0.124	0.124	0.235	0.235	0.235
70(10-150)	70(10-150)	70(10-150)	100(10-150)	100(10-150)	100(10-150)
57/54/48	57/54/48	59/56/50	60/56/53	61/57/54	62/58/55
35/32/26	35/32/26	37/34/28	38/34/31	39/35/32	40/36/33
290x1,000x700	290x1,000x700	290x1,000x700	290x1,400x700	290x1,400x700	290x1,400x700
Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
34	34	34	46	46	46


SIZE 60-90 MF2E5A

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
1/2" 200 flexible hose supplied
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

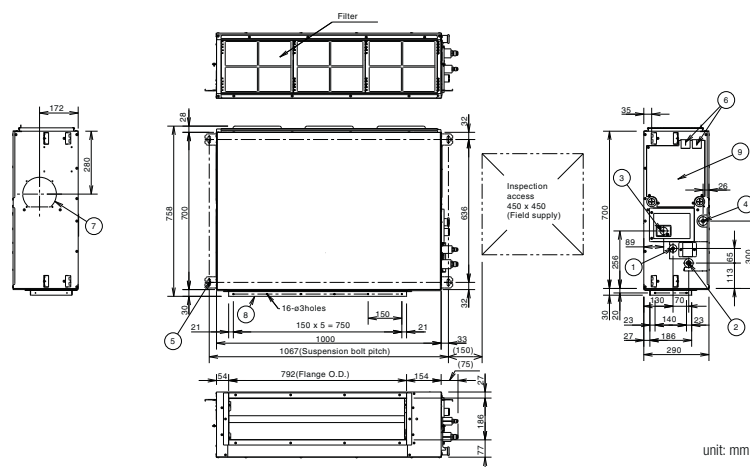

SIZE 106-160 MF2E5A

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
1/2" 200 flexible hose supplied
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

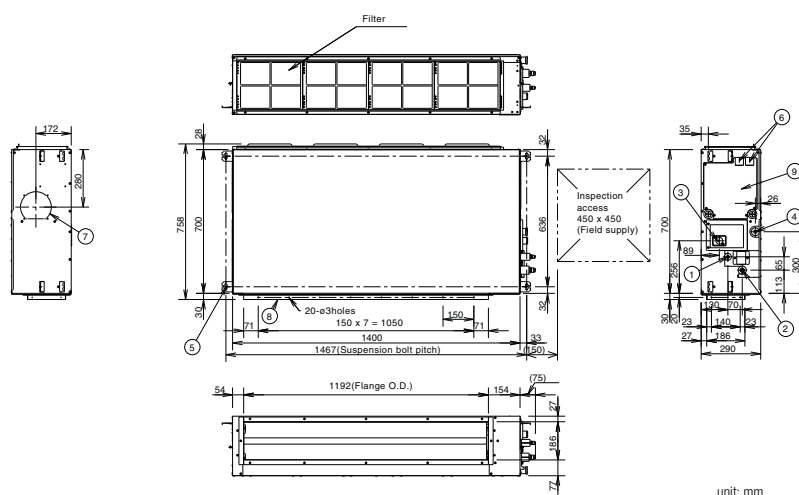

M1^{TYPE} Slim Low Static Ducted

Concealed duct



The ultra slim M1 type is one of the leading products of its kind in the industry. With a height of only 200mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Automatic
Restart
Function



Built-in Drain
Pump

Technical focus

- Ultra-slim profile: 200mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Anti-mould washable filters included
- Easy maintenance and service by external electrical box
- 40Pa static pressure enables ductwork to be fitted.
- Up to 653mm drain pump


Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power

Using the built-in high-lift drain pump, the drain piping rise height can be increased up to 653mm from the lower surface of the body.

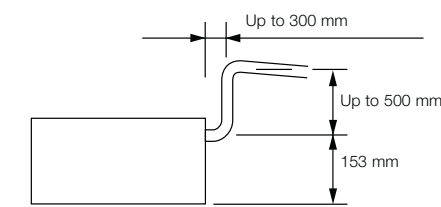



S-22MM1E5A / S-28MM1E5A / S-36MM1E5A
S-45MM1E5A / S-56MM1E5A

ECONAVI
ECONAVI ready



CZ-CENSC1



CZ-RTC5A



For all indoor units
CZ-RWSK2 +
CZ-RWSC3


Model Name			S-22MM1E5A	S-28MM1E5A	S-36MM1E5A	S-45MM1E5A	S-56MM1E5A
Power source			220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6
	BTU/h		7,500	9,600	12,000	15,000	19,000
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3
	BTU/h		8,500	11,000	14,000	17,000	21,000
Power input	Cooling	kW	0.036/0.036/0.036	0.040/0.040/0.040	0.042/0.042/0.042	0.049/0.049/0.049	0.064/0.064/0.064
	Heating	kW	0.026/0.026/0.026	0.030/0.030/0.030	0.032/0.032/0.032	0.039/0.039/0.039	0.054/0.054/0.054
Running current	Cooling	A	0.26/0.26/0.26	0.30/0.30/0.30	0.31/0.31/0.31	0.37/0.37/0.37	0.48/0.48/0.48
	Heating	A	0.23/0.23/0.23	0.27/0.27/0.27	0.28/0.28/0.28	0.34/0.34/0.34	0.45/0.45/0.45
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	480/420/360	510/450/390	540/480/420	630/570/480	750/690/600
		L/s	133/117/100	142/125/108	150/133/117	175/158/133	208/192/167
	Motor output	kW	0.05	0.05	0.05	0.05	0.05
	External static pressure	Pa	10 (30)	15 (30)	15 (40)	15 (40)	15 (40)
Sound power level (H/M/L)			dB	43/42/40	45/44/42	47/45/43	49/47/45
Sound pressure level (H/M/L)			dB(A)	28/27/25 (30/29/27)*	30/29/27 (32/31/29)*	32/30/28 (34/32/30)*	34/32/30 (36/34/32)*
Dimensions			H x W x D	mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight			kg	19	19	19	19

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

* With booster cable.

M1 TYPE SLIM LOW STATIC DUCTED Dimensions

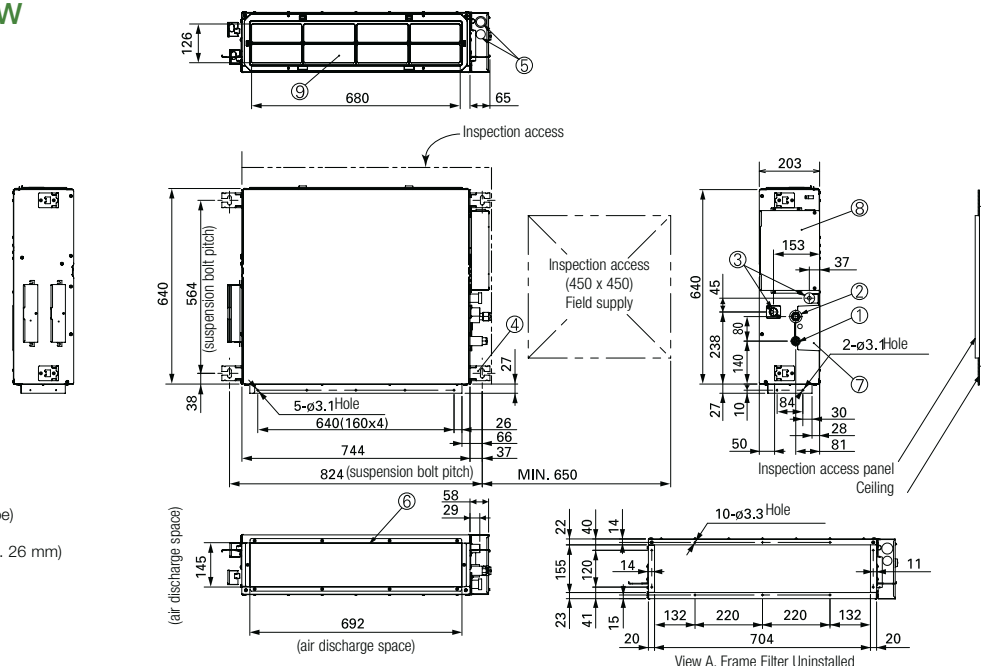

unit: mm

Z1 TYPE Slim & Narrow Ducted Concealed duct

The ultra slim Z1 type is one of the leading products of its type in the industry. With a height of only 200mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Automatic
Restart
Function

Technical focus

- Ultra-slim profile: 200mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 29Pa static pressure enables ductwork to be fitted
- Up to 700mm drain pump (optional)

Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump (optional)

Using the optional high-lift drain pump, the drain piping rise height can be increased to 700mm from the drain pipe port.

Note: Refer to Technical Document for further detail.



CZ-73DMZ1



S-22MZ1H4A/ S-28MZ1H4A/ S-36MZ1H4A/
S-45MZ1H4A/ S-56MZ1H4A/ S-60MZ1H4A



S-73MZ1H4A



ECONAVI ready



CZ-CENSC1



CZ-RTC5A



For all indoor units
CZ-RWSK2 +
CZ-RWSC3


Model Name		S-22MZ1H4A	S-28MZ1H4A	S-36MZ1H4A	S-45MZ1H4A	S-56MZ1H4A	S-60MZ1H4A	S-73MZ1H4A
Power source		220/230/240 V, 1 phase - 50 / 60 Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3
	BTU/h	7,500	9,500	12,200	15,300	19,100	20,500	24,900
Heating capacity	kW	2.5	3.2	4.2	5.1	6.4	7.1	8.0
	BTU/h	8,500	10,900	14,300	17,400	21,800	24,200	27,300
Power input	Cooling kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
	Heating kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
Running current	Cooling A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
	Heating A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
Fan	Type	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan	Sirroco fan
	Air flow rate (H/M/L) m³/h	480/420/360	600/540/420	600/540/420	690/630/510	720/660/540	870/750/630	1,080/840/660
	L/s	133/117/100	167/150/117	167/150/117	192/175/142	200/183/150	242/208/175	300/233/183
	Motor output W	60	60	60	60	60	60	60
	External static pressure Pa	10-30	10-30	10-30	10-30	10-30	10-30	10-30
Sound power level (H/M/L) dB		50/49/47	52/51/49	54/52/50	56/54/52	57/55/53	60/57/55	62/60/58
Sound pressure level (H/M/L) dB(A)		28/27/25	30/29/27	32/30/28	34/32/30	35/33/31	38/35/33	40/38/36
Dimensions H x W x D mm		200x830x500	200x830x500	200x830x500	200x830x500	200x830x500	200x830x500	200x1,050x550
Pipe connections	Liquid mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm
Net weight kg		17	17	18	18	18	18	24

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications are subject to change without notice.

Z1 TYPE SLIM & NARROW DUCTED Dimensions

SIZE 22-60MZ1H4A

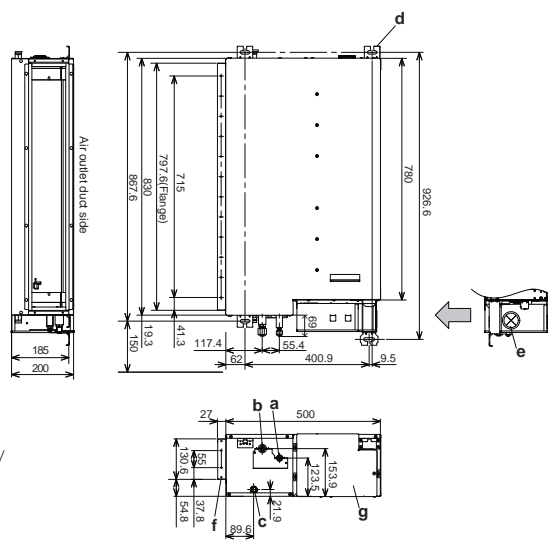

SIZE 73MZ1H4A

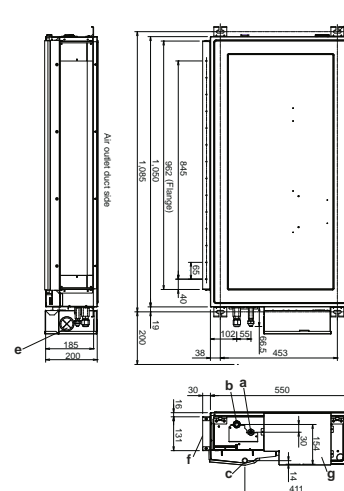

unit: mm

E2_{TYPE} High Static Ducted

Concealed duct



High static and large airflow ducted for exceptional installation flexibility.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Automatic
Restart
Function

Technical focus

- Design flexibility thanks to high static pressure and large air volume
- DC motor equipped
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control
- Available Fresh Air Intake mode (See page 80-81)

3-step static pressure set up

You can select between the three Static Pressure modes of 270Pa /140Pa /60 (72*)Pa for extra installation flexibility.



* 28.0kW model

Up to 270Pa static pressure setting


A maximum static pressure setting of a high 270Pa enables the use of long ducts for installation in a wide range of spaces. Ideal for large-scale offices, restaurants and other facilities.

Sensible cooling 5-10% improved

New heat exchanger with $\phi 7$ mm pipe that increases the heat transfer surface to improve sensible cooling (5-10% improvement)

Discharge air temperature control

- Equipped with 4 sensors (Intake /Discharge)
- Able to control discharge air temperature for accurate room temperature control
- Possible to reduce cold drafts during heating operation.

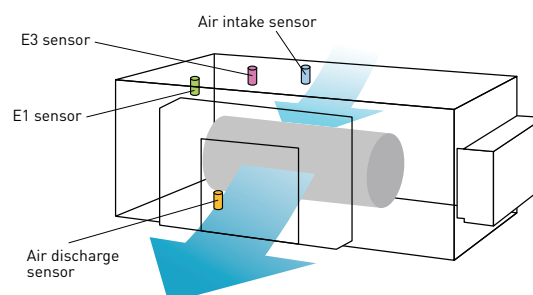



S-180ME2E5 / S-224ME2E5 / S-280ME2E5



CZ-RTC5A

For all indoor units
CZ-RWSK2 +
CZ-RWSC3


Model Name			S-180ME2E5	S-224ME2E5	S-280ME2E5
Power source			220/230/240 V, 1 phase - 50/60Hz		
Cooling capacity	kW		18.0	22.4	28.0
	BTU/h		61,400	76,400	95,500
Heating capacity	kW		20.0	25.0	31.5
	BTU/h		68,200	85,300	107,500
Power input	Cooling	kW	0.400	0.440	0.715
	Heating	kW	0.400	0.440	0.715
Running current	Cooling	A	2.40 / 2.30 / 2.20	2.55 / 2.45 / 2.35	3.95 / 3.85 / 3.70
	Heating	A	2.40 / 2.30 / 2.20	2.55 / 2.45 / 2.35	3.95 / 3.85 / 3.70
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	2,940 / 2,640 / 2,340	3,360 / 3,060 / 2,640	4,320 / 3,780 / 3,180
		L/s	816 / 733 / 650	933 / 850 / 733	1,200 / 1,050 / 883
	External static pressure	Pa	140 (60/270)	140 (60/270)	140 (72/270)
Sound power level (H/M/L)		dB	76 / 74 / 72	77 / 75 / 73	81 / 79 / 75
Sound pressure level (H/M/L)		dB(A)	44 / 42 / 40	45 / 43 / 41	49 / 47 / 43
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205	479 x 1,453 x 1,205
Pipe connections	Liquid	inches (mm)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas	inches (mm)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.22 (7/8)
	Drain piping		VP-25	VP-25	VP-25
Net weight	kg		102	102	106

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

E2 TYPE HIGH STATIC DUCTED Dimensions

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes)
180 & 224 type: Ø19.05, 280 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Optional outlet for piping
- 6 Drain port 25 A, male thread
- 7 Duct connection for suction
- 8 Duct connection for discharge

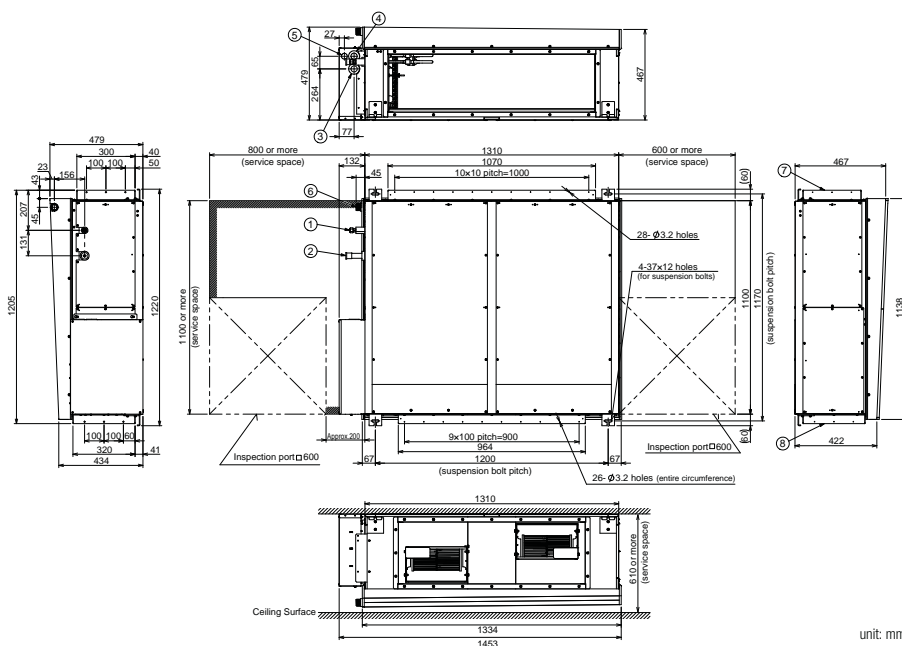

unit: mm

E2_{TYPE} Energy Saving High Fresh Air Ducted



Concealed duct high-static pressure

High static and large airflow ducted for exceptional installation flexibility.



Self-diagnosing
Function



Automatic
Fan
Operation



Automatic
Restart
Function


Technical focus

- 100% fresh air intake for ventilation purpose
- Design flexibility with high static pressure and large air volume
- DC motor equipped
- Power input 45% less (compared to H1 type)
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control

High Fresh System

High Fresh system enables delivery of fresh outside air at almost the same temperature and humidity as indoor air without putting a burden on air conditioning.

*Capable of treating outdoor air only. Indoor air conditioner units are required to adjust indoor air temperature.

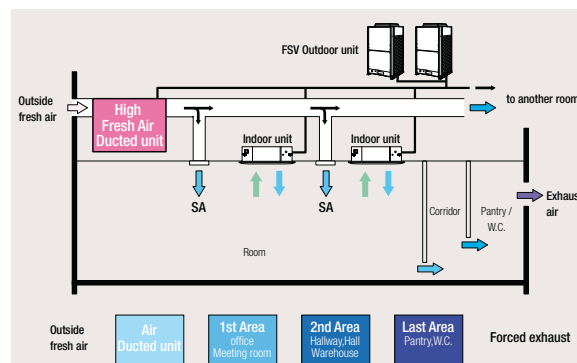

Mix operation unit with standard indoor units


Possible to combine High Fresh Air ducted indoor unit and standard air ducted indoor units.

When other indoor units are connected in same circuit, keep following capacity ratio.

E2 type /Outdoor unit < 30%, and Total of indoors (incl. E2) /outdoor <100%.

Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control
- Possible to reduce cold drafts during heating operation

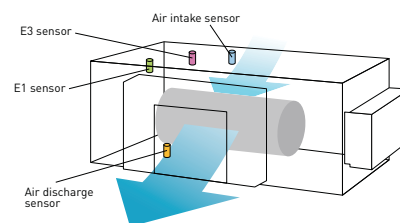

Installation Conditions

Model	Operation	Rap valve kit CZ-P160RVK2 	3way control PCB CZ-CAPE2 	3way valve kit CZ-P160HR3 	Distribution Joint kit <2pipes> CZ-P160BK2 for 22.4kW unit or less CZ-P680BK2 for more than 22.4kW	Distribution Joint kit <3pipes> CZ-P224BH2 for 22.4kW unit CZ-P680BH2 for 28.0kW unit
E2 Type Energy Saving High-Fresh Air Ducted	Cooling Only	-	-	-	-	-
	Cool or Heat	2pcs	2pcs	-	2pcs	-
	Heat Recovery	-	2pcs	2pcs	1pc	1pc

Note: Refer to Technical Document for further detail.



For all indoor units
CZ-RWSK2 +
CZ-RWSC3


Model Name			S-224ME2E5	S-280ME2E5
Power source			220/230/240 V, 1 phase - 50/60Hz	
Cooling capacity		kW	22.4	28.0
		BTU/h	76,400	95,500
Heating capacity		kW	21.2	26.5
		BTU/h	72,200	90,400
Power input	Cooling	kW	0.290	0.350
	Heating	kW	0.290	0.350
Running current	Cooling	A	1.80	2.10
	Heating	A	1.80	2.10
Fan	Type		Sirocco fan	Sirocco fan
	Air flow rate	m³/h	1,700	2,100
		L/s	472	583
	Motor output	W	560	560
	External static pressure	Pa	200	200
Sound power level		dB	75	76
Sound pressure level		dB(A)	43	44
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205
Pipe connections	Liquid	inches (mm)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	inches (mm)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)
	Drain piping		VP-25	VP-25
Net weight		kg	102	106

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Outdoor air temperature	33°C DB / 28°C WB	0°C DB / -2.9°C WB

Specifications are subject to change without notice.

E2 TYPE HIGH STATIC DUCTED Dimensions

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes)
224 type: Ø19.05, 280 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Optional outlet for piping
- 6 Drain port 25 A, male thread
- 7 Duct connection for suction
- 8 Duct connection for discharge

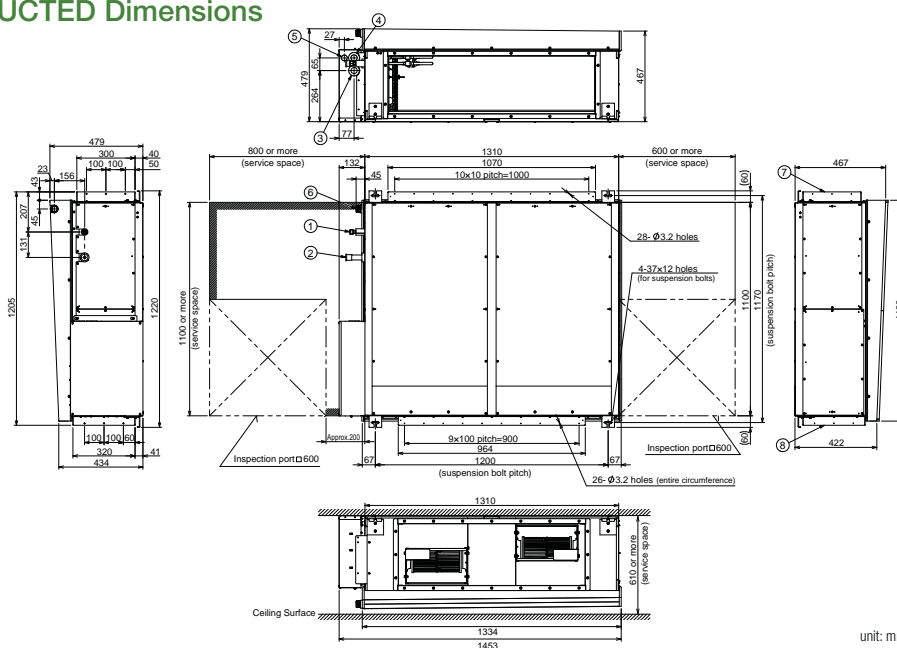

unit: mm

E1 TYPE High Static Ducted

Concealed duct high-static pressure

Hidden in the ceiling to provide an ideal match for luxury residences and light commercial buildings.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry




Automatic
Restart
Function

Technical focus

- Complete flexibility for ductwork design
- Can be located into a weatherproof housing for external installation
- Up to 150Pa external static pressure
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control
- Up to 70L/s airflow


System example

An inspection port (450mm x 450mm or more) is required at the control-box side of the indoor unit body.

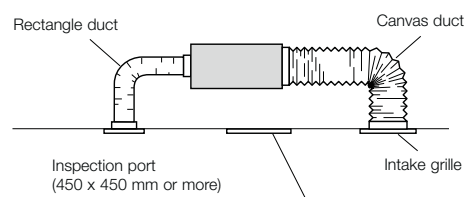


Cold drafts reduced when heating

Accurate temperature measurement by E1 /E3 sensor to reduce cold drafts when heating.

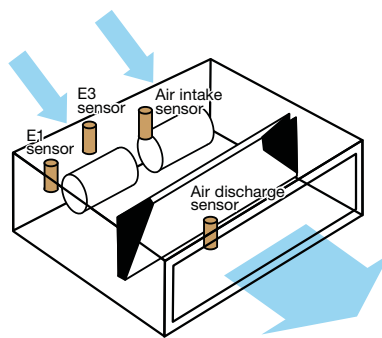


Compact body size

Hidden in the ceiling, ideal when interior decor is an important consideration such as in residences with many rooms and light commercial buildings.

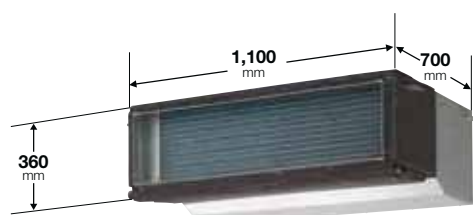

S-90ME1R5A / S-112ME1R5A

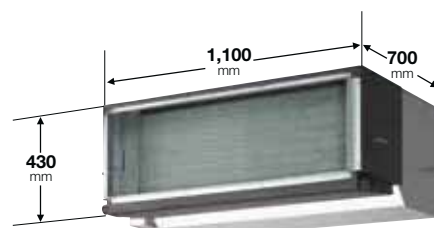

S-140ME1R5A / S-160ME1R5A



S-90ME1R5A/
S-112ME1R5A



S-140ME1R5A/
S-160ME1R5A

ECONAVI

ECONAVI ready



CZ-RTC5A





For all indoor units
CZ-RWSK2 +
CZ-RWSC3

Model Name			S-90ME1R5A	S-112ME1R5A	S-140ME1R5A	S-160ME1R5A
Power source			230/240 V, 1 phase - 50Hz			
Cooling capacity	kW		9.0	11.2	14.0	16.0
	BTU/h		30,700	38,200	47,800	54,600
Heating capacity	kW		10.0	12.5	16.0	18.0
	BTU/h		34,100	42,700	54,600	61,400
Power input	Cooling	kW	0.275/0.290	0.390/0.410	0.410/0.430	0.590/0.640
	Heating	kW	0.275/0.290	0.390/0.410	0.410/0.430	0.590/0.640
Running current	Cooling	A	1.24/1.25	1.72/1.74	1.82/1.84	2.62/2.70
	Heating	A	1.24/1.25	1.72/1.74	1.82/1.84	2.62/2.70
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	1,800/1,560/1,320	2,400/2,100/1,740	3,000/2,760/2,160	3,600/3,000/2,520
		L/s	500/433/366	666/583/483	833/766/600	1,000/833/700
	Motor output	kW	0.155	0.275	0.310	0.44
External static pressure		Pa	100 (max150)	100 (max150)	100 (max150)	100 (max150)
Sound power level (H/M/L)		dB	62/61/60	70/68/66	71/69/67	73/71/69
Sound pressure level (H/M/L)		dB(A)	45/44/43	48/46/44	49/47/45	51/49/47
Dimensions	H x W x D	mm	360 x 1,100(+100) x 700	360 x 1,100(+100) x 700	430 x 1,100(+100) x 700	430 x 1,100(+100) x 700
Pipe connections	Liquid	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25
Net weight		kg	42	44	48	53

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications are subject to be changed without notice.

E1 TYPE HIGH STATIC DUCTED Dimensions

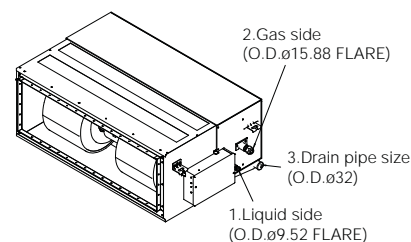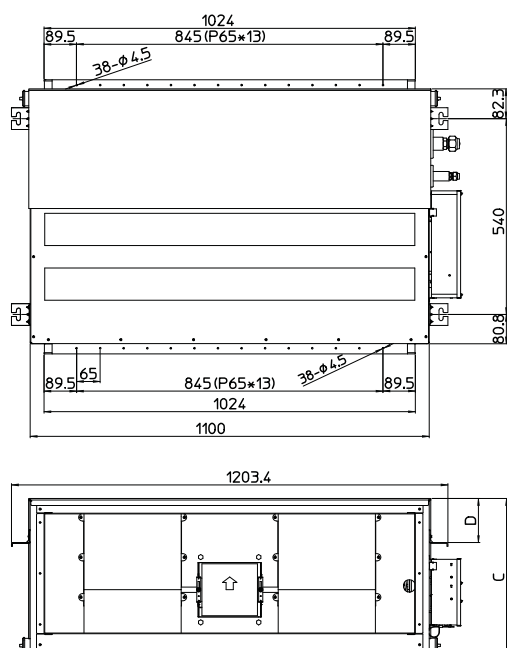

Dimensions: mm

model	A	B	C	D
S-90ME1R5A S-112ME1R5A	195	35.7	360	50
S-140ME1R5A S-160ME1R5A	260	38.2	430	121.5

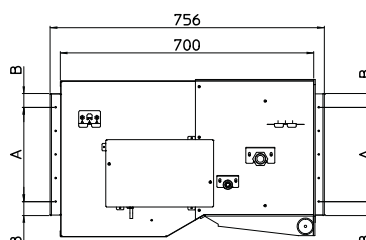

K2 TYPE Wall Mounted



The K2 type wall mounted unit has a smooth stylish design with a washable front panel. Small, lightweight and low noise level makes it ideal for small offices and other commercial applications.



Self-diagnosing Function



Automatic Fan Operation



Mild dry



Intelligent Auto Swing



Automatic Restart Function



Auto Swing (Auto Flap Control)

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit
- Anti-mould washable filters are included

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)




CZ-P56SVK2 (for 22 - 56 type)

CZ-P160SVK2 (for 73 - 106 type)

Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Compact indoor units make the installation easy

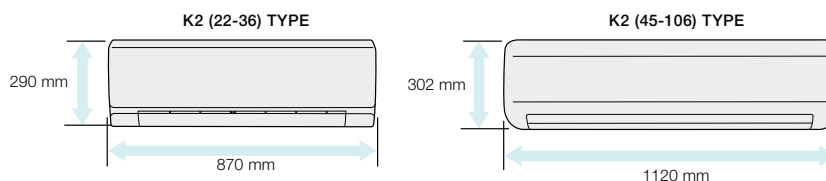



S-22MK2E5A / S-28MK2E5A /
S-36MK2E5A



S-45MK2E5A / S-56MK2E5A /
S-73MK2E5A / S-106MK2E5A



CZ-CENSC1



CZ-RTC5A



CZ-RWSU3

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Smooth and durable design

The smooth cover means these units match most modern interiors.
Their compact size enables them to blend in, even in small spaces.

Piping outlet in six directions

Piping outlet is possible in the six directions of: right, right rear, right bottom, left, left rear, left bottom, making installation easier.


Washable front panel

The indoor unit's front panel can be easily removed and washed for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



K2 TYPE

Wall Mounted









Model Name			S-22MK2E5A	S-28MK2E5A	S-36MK2E5A	S-45MK2E5A	
Power source			220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity	kW		2.20	2.80	3.60	4.5	
	BTU/h		7,500	9,600	12,000	15,400	
Heating capacity	kW		2.50	3.20	4.20	5.0	
	BTU/h		8,500	11,000	14,000	17,100	
Power input	Cooling	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030	
	Heating	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030	
Running current	Cooling	A	0.21	0.23	0.25	0.33/0.32/0.31	
	Heating	A	0.21	0.23	0.25	0.33/0.32/0.31	
Fan	Type		Cross-flow fan	Cross-flow fan	Cross-flow fan	Cross-flow fan	
	Air flow rate (H/M/L)	m³/h	540/450/390	570/500/390	655/540/390	870/750/600	
		L/s	150/125/108	158/139/108	182/150/108	242/209/167	
	Motor output	kW	0.03	0.03	0.03	0.054	
Sound power level (H/M/L)		dB	51/48/44	52/49/44	55/51/44	53/50/48	
Sound pressure level (H/M/L)		dB(A)	36/33/29	37/34/29	40/36/29	38/35/33	
Dimensions	H x W x D	mm	290 x 870 x 214	290 x 870 x 214	290 x 870 x 214	302 x 1,120 x 236	
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	
	Drain piping	mm	Ø18	Ø18	Ø18	Ø18	
Net weight		kg	9	9	9	13	

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

K2 (45-106) TYPE WALL MOUNTED Dimensions

S-22MK2E5A / S-28MK2E5A / S-36MK2E5A

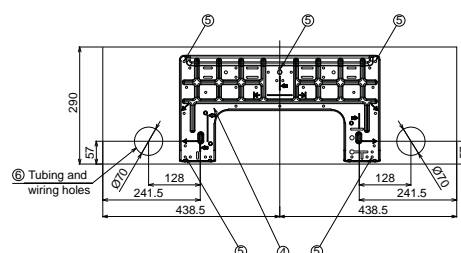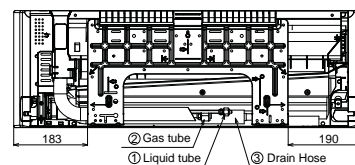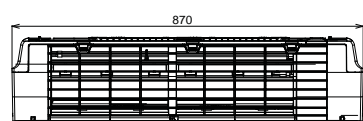


unit: mm

	S-56MK2E5A	S-73MK2E5A	S-106MK2E5A
	220/230/240 V, 1 phase - 50 / 60 Hz		
	5.6	7.3	10.6
	19,100	24,900	36,200
	6.3	8.0	11.4
	21,500	27,300	38,900
	0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
	0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
	0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
	0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
	Cross-flow fan	Cross-flow fan	Cross-flow fan
	960/840/720	1,170/1,020/840	1,290/1,110/900
	267/234/200	236/284/234	359/309/251
	0.054	0.054	0.054
	55/52/50	62/59/55	64/61/57
	40/37/35	47/44/40	49/46/42
	302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236
	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Ø18	Ø18	Ø18
	13	14	14

K2 (45-106) TYPE WALL MOUNTED Dimensions

S-45MK2E5A / S-56MK2E5A / S-73MK2E5A / S-106MK2E5A

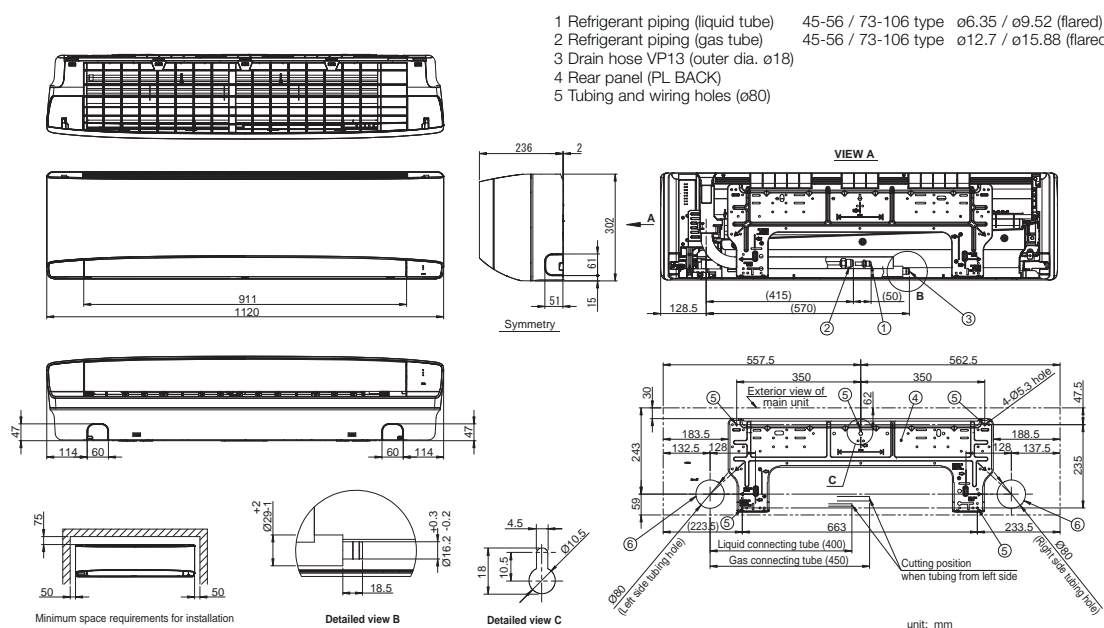

U2_{TYPE} 4-WAY Cassette

Semi concealed cassette



Provides a neat fit in the ceiling to match modern décor, and uniform cooling throughout the room, and easy installation.



Self-diagnosing
Function



Automatic Fan
Operation



Mild dry



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)



Built-in Drain
Pump

Technical focus

- Compact design
- Low sound levels
- DC fan motor for increased efficiency
- Powerful drain pump gives 850 mm lift
- Lightweight design
- Fresh air knockout
- Branch duct connection
- Optional air-intake plenum CZ-FDU3


Flat horizontal design

The horizontal design of the 4-way cassette results in an elegant flat panel. Its slim design allows it to protrude only 33.5mm from the ceiling.



Drain pump of up to 850mm from the ceiling surface

Built in drain pump allows flexible install and design options with up to 850mm lift. Long horizontal piping is also possible.



Easy to clean suction grille


Suction grille is able to make 90-degree turns.



360° wide & comfortable airflow

Comfort air flow control and proper energy use. Flexible Air Flow direction control by individual flap control:

- 4 Flaps can be controlled individually (by standard wired remote controller*)
- Versatile air flow control to cover a wide variety of demands.




Temperature distribution by
thermograph
(cooling operation)




Simulation conditions:
140M 4-way ceiling-mounted cassette
type in cooling mode
/ Floor area of 225m²
/ Ceiling height of 3m

Ample airflow: 36 m³/min
Industry's leading in the 140PU class.

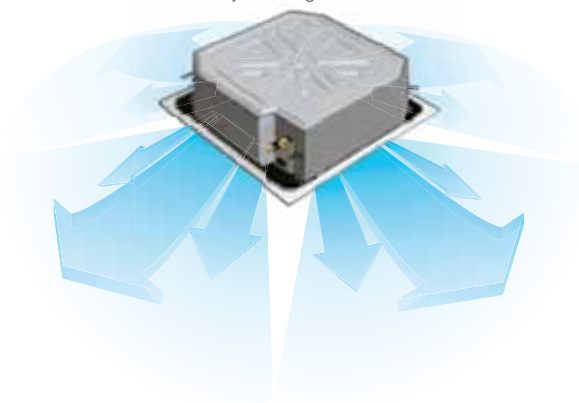

*Pre-setting is required for this function at System Test-run procedure

AIR INTAKE CHAMBER

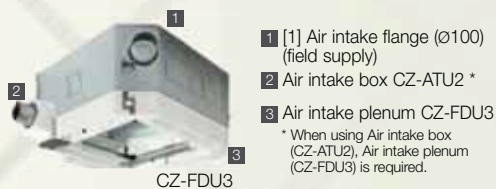

PANEL

Standard Panel: CZ-KPU3
ECONAVI Panel: CZ-KPU3A (Optional)

* When using Air intake box (CZ-ATU2), Air intake plenum (CZ-FDU3) is required.



CZ-RTC5A

For cassette only
CZ-RWSU3

High ceiling installation (Up to 5m for 10.6kW and higher capacity models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

High Ceiling (Factory settings)

New model	2.7m	3.0m	3.6m
Capacity	2.2-5.6kW	6.0-9.0kW	10.6-16.0kW
10.6-16.0kW	4.5m	4.7m	5m
Capacity	4-way discharge high ceiling setting 2	3-way discharge with the optional air-blocking materials	2-way discharge with the optional air-blocking materials

Ceiling height guidelines

Indoor unit	4-way discharge			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *2
	Factory setting 1	High ceiling setting 1	High ceiling setting 2		
2.2-5.6kW	2.7	3.2	3.5	3.8	4.2
6.0-9.0kW	3.0	3.3	3.6	3.8	4.2
10.6-16.0kW	3.6	4.3	5.0	4.7	5.0

*1 When using the unit in a configuration other than the factory settings, it is necessary to make settings onsite to increase airflow.

*2 Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

ECONAVI panel is added into the line up

Continues conventional functions (Energy saving & comfort) and the following have now been added:

- Energy saving function: comfortable energy saving based on temperature and humidity

- New circulate function that improves comfort
- Movement detection improves comfort

ECONAVI energy saving function*

A new humidity sensor added to the air suction part results in more comfort and energy saving functions.

- Energy saving operation in case of low humidity during cooling operation

- Energy saving operation in case of high humidity during heating operation

* Energy saving operation based on activity amount and comfort and energy saving based on temperature and humidity.

Panels

Standard panel: CZ-KPU3
ECONAVI panel: CZ-KPU3A

Wireless receiver (optional)



ECONAVI panel

*CZ-CNEXU1 is required to use nanoe™ X function.

U2_{TYPE} 4-WAY Cassette


Semi concealed cassette



(Optional) * CZ-KPU3A and CZ-RTC5A are required.

ECONAVI, with a new humidity sensor, saves even more electricity

In addition to detecting motion and floor temperature, humidity is also detected, making it possible to comfortably adjust the room temperature to match peoples' movement and the room's humidity.

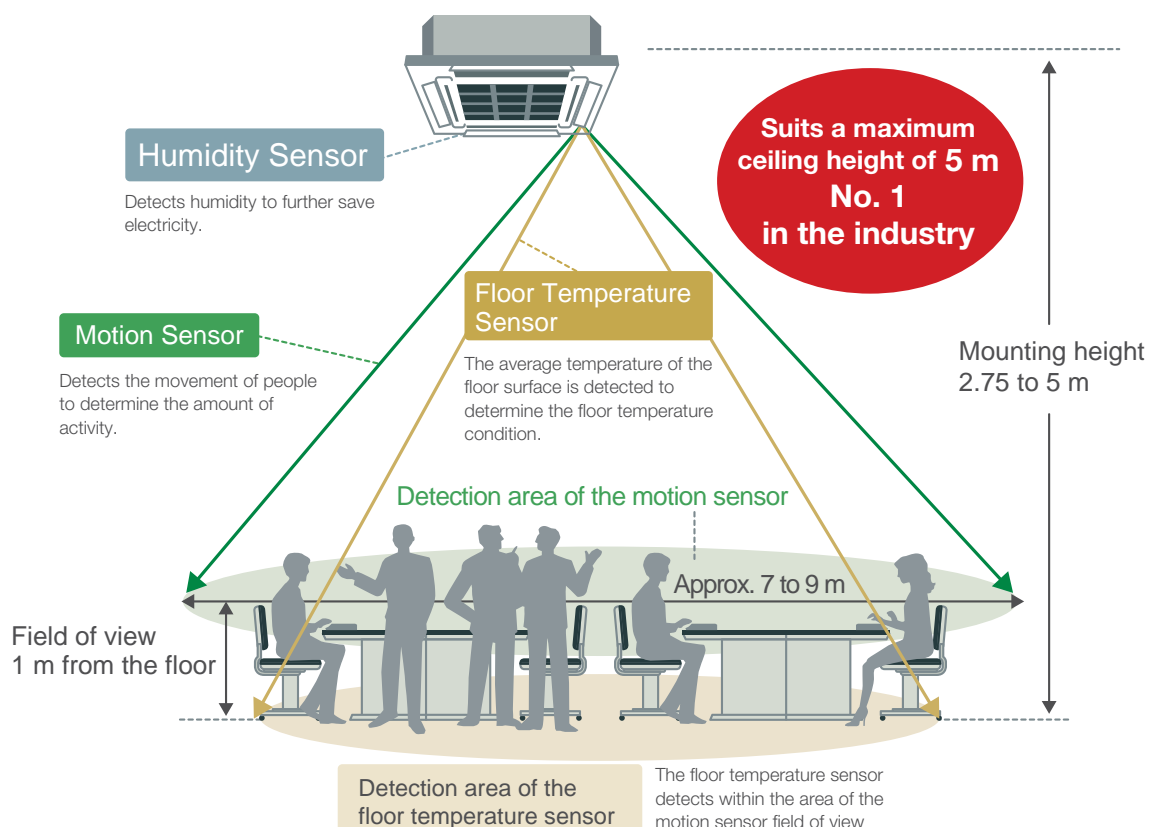

Motion Sensor

The Motion Sensor detects people's movement to cleverly save electricity.

[When People Are Very Active]



Cool & Dry

Operates at the set temperature.

Heat

Operates at a temperature lower than the set temperature.

[When People Are Slightly Active]



Cool & Dry

Operates at a temperature higher than the set temperature.

Heat

Operates at the set temperature.

[When Nobody Is Present]



Cool & Dry

Operates at an even higher temperature than when people are in the room.

Heat

Operates at an even lower temperature than when people are in the room.


When absence continues for the preset time: Operates at the designated absence mode.

When set by remote control: Operating time after absence detection (variable): 30 to 180 minutes (in 30-minute steps), 60 minutes [factory setting (variable)]

Humidity Sensor


Energy-saving operation is controlled by the thermal sensation index.

Cooling	Even when activity is high, when the temperature is low the set temperature is raised.
Heating	Even when activity is low, when the temperature is high the set temperature is lowered.

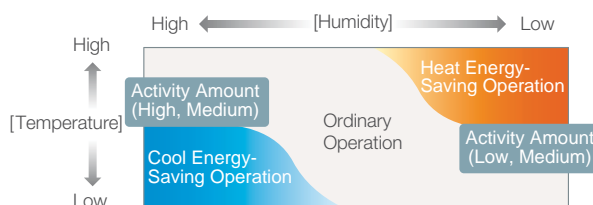

Airflow Control

The airflow direction is controlled to suit people's presence. Direct Airflow swings the airflow up and down in the area where people are present so the airflow contacts people directly. Indirect Airflow positions the flap horizontally to prevent the airflow from contacting people directly. The settings of these two patterns combine to control the airflow when people are present or absent.

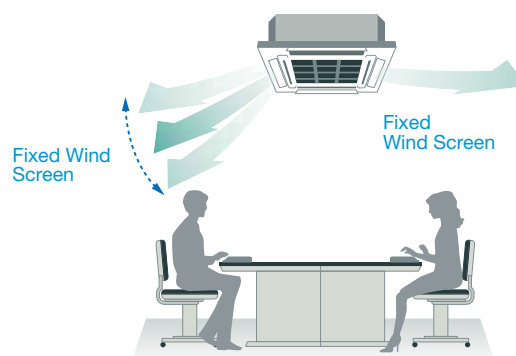


Circulation Control


When the floor temperature sensor detects a low floor temperature during heating, a unique circulation flap operates to reduce the temperature gap between the ceiling and floor areas. This quickly and stably raises the temperature in the floor area.

With 1 indoor unit installed

When heating

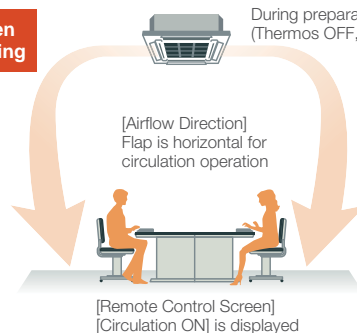


Panasonic Original Technology

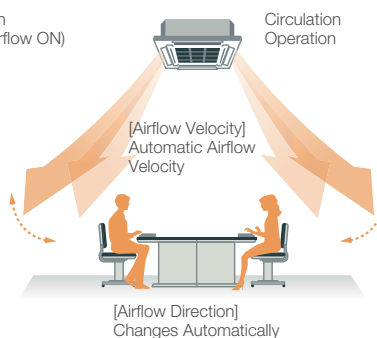

Furthermore, with 2 indoor units installed, when the absence of people is detected while the indirect Airflow setting is ON, circulation operation is automatically activated.

Panasonic Original Technology

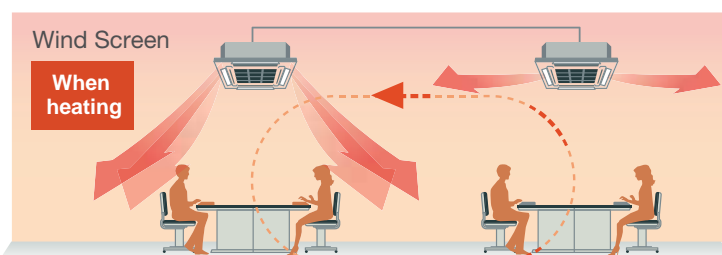

When the absence of people is detected, circulation operation is activated. * Operation image

Wind Screen	Heating	When the absence of people is detected, circulation operation is activated.
	Cooling	When the absence of people is detected, operation is activated for new circulation operation conditions to prevent drafts.
Wind Contact	Heating	Circulation operation is activated regardless of whether people are present or absent.
	Cooling	Circulation operation is not activated even if people are present, to prevent drafts.

U2_{TYPE} 4-WAY Cassette

Semi concealed cassette




(Optional) * CZ-CNEXU1 and CZ-RTC5A are required.

nanoe X keeps air conditioning and your air clean

What's nanoe?

nanoe is a system that uses fine particle ions generated from moisture in the air to form tiny particles from electrically charged water molecules. Filled with OH radicals, these water capsules suppress the activity of pollen (allergens) in the air, and help to eliminate odours.


Generation Principle: Moisture in the air is activated...

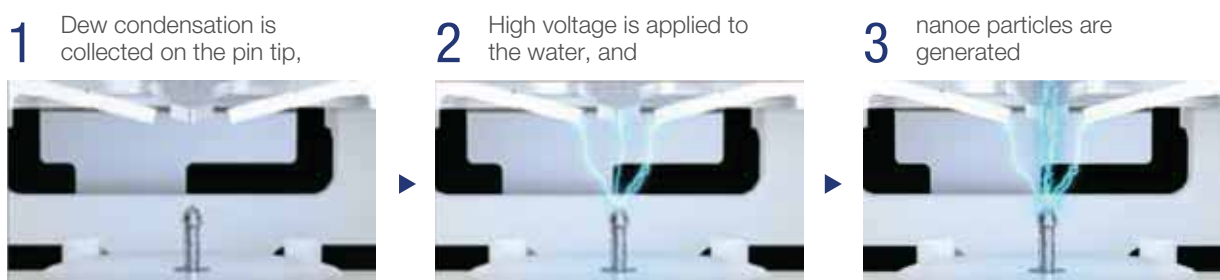


Invisible Air Contaminants Are Suppressed



Odours are suppressed

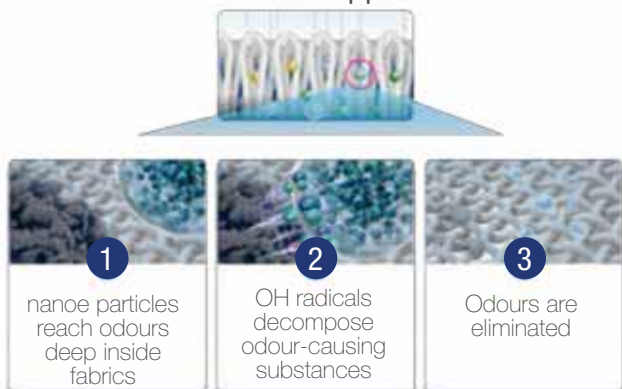


Allergens are suppressed

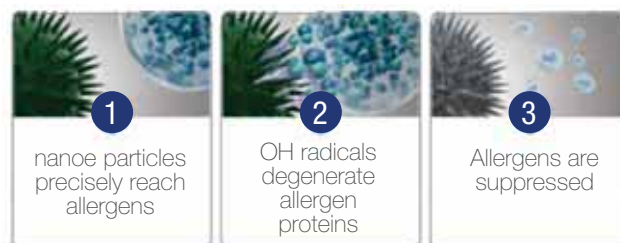

nanoe X with Better Concentration

The newly developed nanoe X device uses a counter electrode with four pins and a Multi-Leader Discharge that sends intensive discharges toward the pin tips. This expands the generation zone of electron-dense OH radicals, thus increasing the amount of OH radicals.

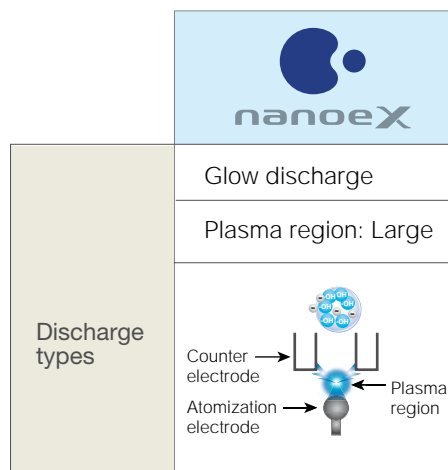

nanoe Airflow at a Comfortable Temperature


- While working, you enjoy cooling or heating at a comfortable temperature, and a fresh breeze.
- After work, when everyone is gone, ventilating operation continues to provide the nanoe effect.
- You can start work each day in a room filled with refreshing air.




nanoe particles are discharged from a single port, then carried and dispersed on the air conditioner's airflow.

The Interior Stays Clean with nanoe + Drying Control

After the Cool & Dry mode stops, a short ventilation operation is activated, and the indoor unit interior (heat exchanger, fan, air ducts) is dried and cleaned with nanoe particles.

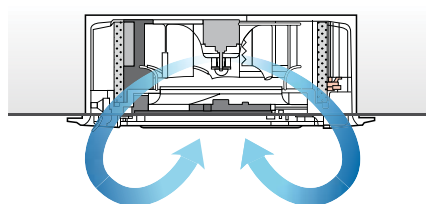

Turn on the fan, and Nanoe circulates internally

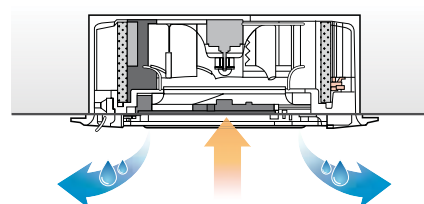

Sent air to inside

U2_{TYPE} 4-WAY Cassette

Semi concealed cassette



Model Name			S-22MU2E5A	S-28MU2E5A	S-36MU2E5A	S-45MU2E5A	S-56MU2E5A	
Power source			220/230/240 V, 1 phase - 50Hz/60Hz					
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6	
	BTU/h		7,500	9,600	12,300	15,400	19,100	
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3	
	BTU/h		8,500	10,900	14,300	17,100	21,500	
Power input	Cooling	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025	
	Heating	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025	
Running current	Cooling	A	0.21/0.21/0.20	0.21/0.21/0.20	0.21/0.21/0.20	0.21/0.21/0.20	0.24/0.23/0.22	
	Heating	A	0.20/0.20/0.19	0.20/0.20/0.19	0.20/0.20/0.19	0.20/0.20/0.19	0.23/0.22/0.21	
Fan	Type		Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	
	Air flow rate (H/M/L)	m³/h	870/780/690	870/780/690	870/780/690	930/780/690	990/810/690	
		L/s	233/200/183	233/200/183	233/200/183	250/217/200	267/250/200	
	Motor output	kW	0.06	0.06	0.06	0.06	0.06	
Sound power level (H/M/L)		dB	45/44/43	45/44/43	45/44/43	46/44/43	47/45/43	
Sound pressure level (H/M/L)		dB(A)	30/29/28	30/29/28	30/29/28	31/29/28	32/30/28	
Dimensions	H x W x D	mm	256+(33.5) x 840 (950) x 840 (950)					
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25	
Net weight (Panel)		kg	19 (+5)	19 (+5)	19 (+5)	19 (+5)	19 (+5)	

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.




	S-60MU2E5A	S-73MU2E5A	S-90MU2E5A	S-106MU2E5A	S-140MU2E5A	S-160MU2E5A
	220/230/240 V, 1 phase - 50Hz/60Hz					
	6.0	7.3	9.0	10.6	14.0	16.0
	20,500	24,900	30,700	36,200	47,800	54,600
	7.1	8.0	10.0	11.4	16.0	18.0
	24,200	27,300	34,100	38,900	54,600	61,400
	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.090/0.090/0.090	0.095/0.095/0.095	0.105/0.105/0.105
	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.085/0.085/0.085	0.090/0.090/0.090	0.100/0.100/0.100
	0.34/0.33/0.32	0.37/0.36/0.35	0.39/0.38/0.37	0.74/0.71/0.68	0.77/0.74/0.71	0.85/0.82/0.79
	0.33/0.32/0.31	0.36/0.35/0.34	0.38/0.37/0.36	0.72/0.69/0.66	0.75/0.72/0.69	0.83/0.80/0.77
	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
	1,260/960/780	1,350/960/780	1,380/1,110/840	2,040/1,500/1,140	2,160/1,560/1,200	2,220/1,680/1,440
	350/283/233	367/283/233	383/317/250	550/450/350	583/467/367	600/483/383
	0.06	0.06	0.06	0.09	0.09	0.09
	51/47/44	52/47/44	53/50/47	59/53/49	60/54/50	61/55/53
	36/32/29	37/32/29	38/35/32	44/38/34	45/39/35	46/40/38
	319+(33.5) x 840 (950) x 840 (950)					
	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
	20 (+5)	20 (+5)	20 (+5)	25 (+5)	25 (+5)	25 (+5)

U2 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Discharge outlet
- 3 Refrigerant piping (liquid tube) 22-56 type ø6.35 (flared), 60-90 type ø9.52 (flared)
- 4 Refrigerant piping (gas tube) 22-56 type ø12.7 (flared), 60-90 type ø15.88 (flared)
- 5 Drain tube connection port VP25 (outer dia. ø32)
- 6 Power supply port
- 7 Discharge duct connection port (ø150)
- 8 Suspension bolt hole (4-12×30 elongated hole)
- 9 Fresh air intake duct connection port (ø100) *
- 10 ECONAVI sensor (Only CZ-KPU3A)

*1: Necessary to attach duct connecting flange (field supplied).
Filter size: 520 x 520 x 15

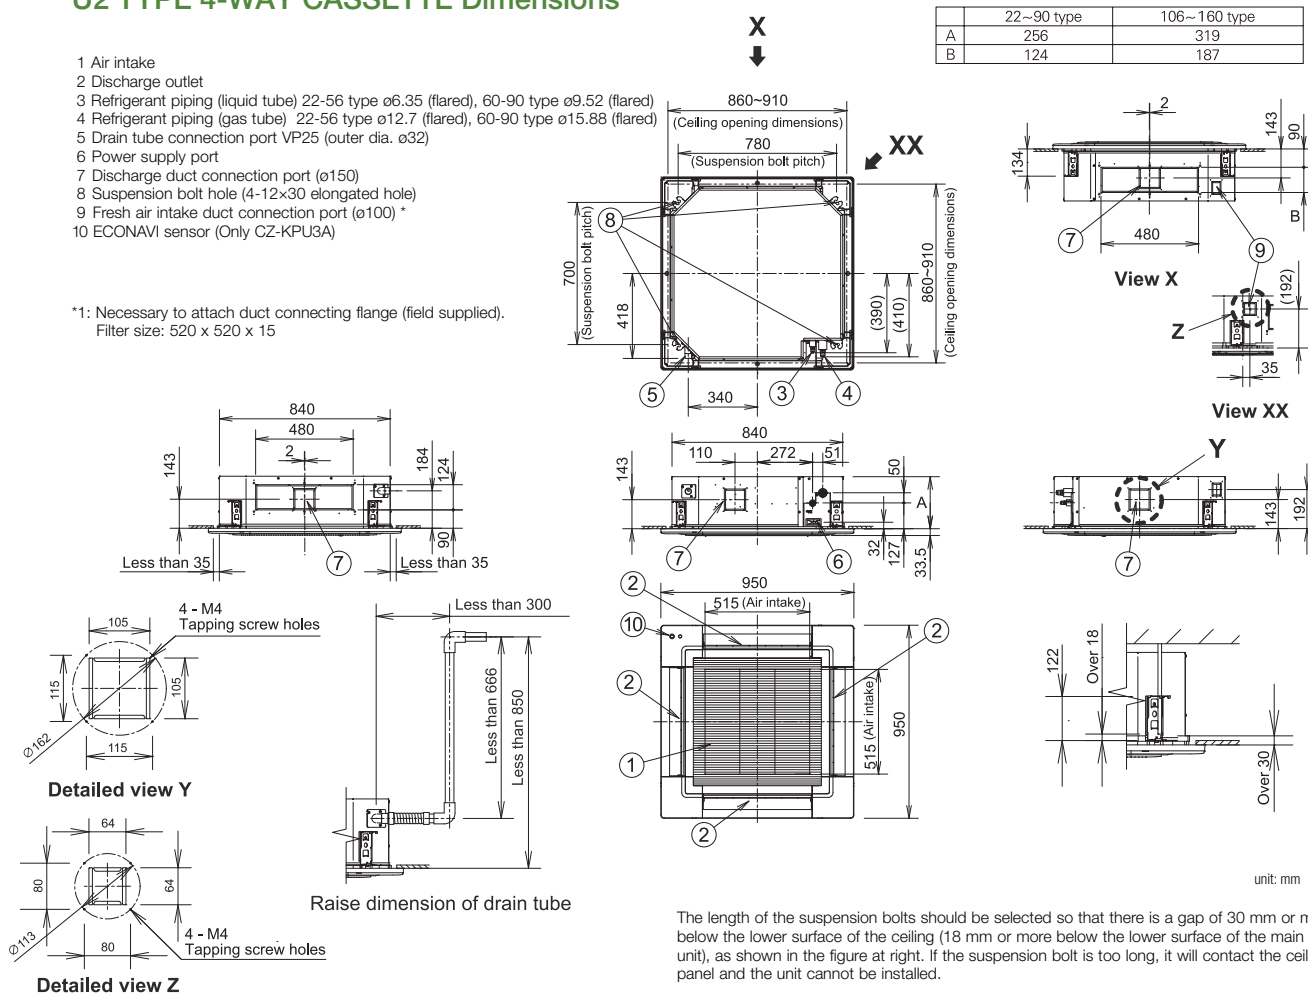

The length of the suspension bolts should be selected so that there is a gap of 30 mm or more below the lower surface of the ceiling (18 mm or more below the lower surface of the main unit), as shown in the figure at right. If the suspension bolt is too long, it will contact the ceiling panel and the unit cannot be installed.

Y2_{TYPE} 4-WAY Mini Cassette

Mini semi concealed cassette



Designed to fit perfectly into a 60 x 60cm ceiling grid without the need to alter the bar configuration, the Y2 is ideal for small commercial and retrofit applications. In addition, improvements to the Y2's efficiency make this model one of the most advanced units in the industry.



Self-diagnosing Function



Automatic Fan Operation



Mild dry



Intelligent Auto Swing



Automatic Restart Function



Auto Swing (Auto Flap Control)




Built-in Drain Pump

Technical focus

- Mini cassette fits into a 60 x 60cm ceiling grid
- Anti-mould and anti-bacteria washable filters
- Powerful drain pump gives 750mm lift
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- Fresh air knock out
- Multi directional air flow


Compact design

The panel is a compact (70 × 70cm) so it can be installed even in a small room where space is limited.

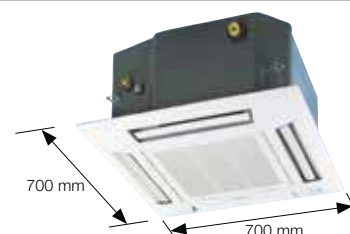


Lighter and slimmer, easier installation

When only 260mm of indoor body height, it can easily fit in limited spaces and tight spots. (Required 288mm from bottom of panel to top of the unit)



A drain height of up to 750mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 750mm above the base of the unit.



Anti-mould long-life air filter

Anti-mould and anti-bacteria washable filter ensures clean, healthy air.





ECONAVI
ECONAVI ready



CZ-CENSC1



CZ-RTC5A



CZ-RWSK2


Model Name		S-22MY2E5A	S-28MY2E5A	S-36MY2E5A	S-45MY2E5A	S-56MY2E5A
Power source		220/230/240 V, 1 phase - 50, 60 Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
	BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
	BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling kW	0.035	0.035	0.040	0.040	0.045
	Heating kW	0.030	0.030	0.035	0.035	0.040
Running amperes	Cooling A	0.30	0.30	0.30	0.32	0.35
	Heating A	0.25	0.30	0.30	0.30	0.35
Fan motor	Type	Turbo fan				
	Airflow rate (H/M/L)	m³/h	547/493/335	558/504/335	583/522/360	601/558/493
		L/s	152/137/93	155/140/93	162/145/100	167/155/137
	Output	kW	0.04	0.04	0.04	0.04
Power sound level (H/M/L)	Cooling	dB	50/48/46	50/48/46	51/49/47	53/51/48
	Heating	dB	50/48/44	50/48/44	51/49/45	53/51/47
Sound pressure level (H/M/L)	Cooling	dB(A)	35/33/31	35/33/31	36/34/32	38/36/33
	Heating	dB(A)	35/33/29	35/33/29	36/34/30	38/36/32
Dimensions*	H x W x D	mm	288 (+31) x 575 (700) x 575 (700)	288 (+31) x 575 (700) x 575 (700)	288 (+31) x 575 (700) x 575 (700)	288 (+31) x 575 (700) x 575 (700)
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
Pipe connections	Drain piping		VP-25	VP-25	VP-25	VP-25
Net weight*	kg	18 (+2.4)	18 (+2.4)	18 (+2.4)	18 (+2.4)	18 (+2.4)

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

*The values in () for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

Y2 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake grill
- 2 Air outlet
- 3 Refrigerant piping (liquid pipe) Ø6.35 (flared)
- 4 Refrigerant piping (gas pipe) Ø12.7 (flared)
- 5 Drain tube connection port VP25 (outer Ø32)
- 6 Power supply entry
- 7 Suspension bolt hole (4-11 x 26 slot)
- 8 Fresh air intake duct connection port (Ø80)

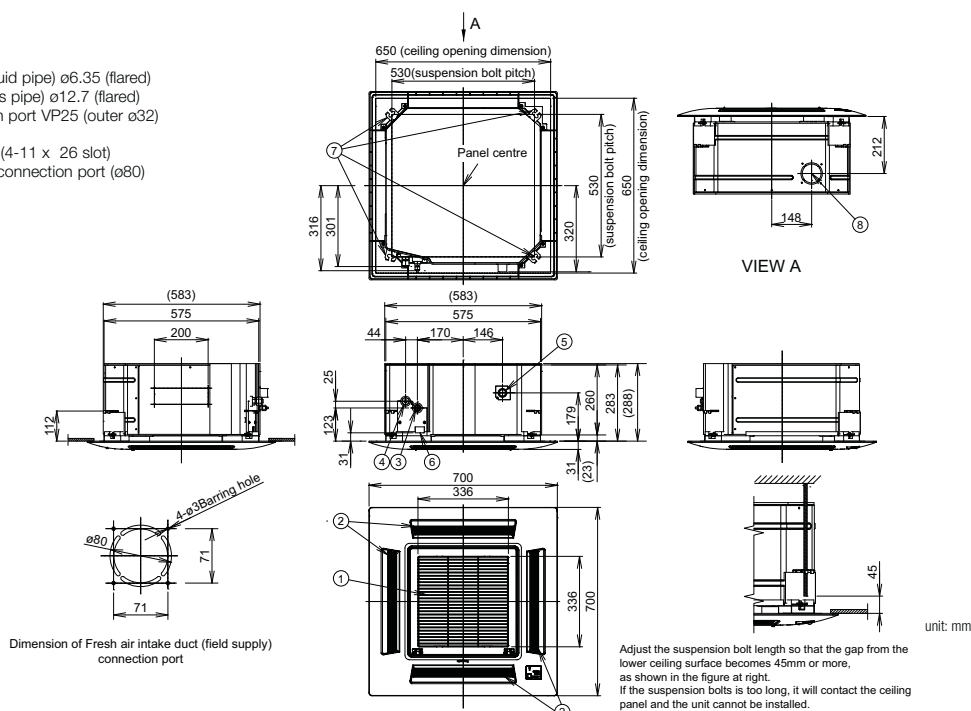

L1 TYPE 2-WAY Cassette

Semi concealed cassette

The L1 is very thin, compact and light, allowing flexible install options.
A redesigned fan has been used to achieve this size and weight reduction.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)




Built-in Drain
Pump

Technical focus

- Airflow and distribution is automatically altered depending on the operational mode of the unit
- Drain up is possible up to 500mm via the built-in drain pump
- Simple maintenance


Auto flap control

Airflow and distribution is automatically altered depending on the operational mode (cooling or heating) of the unit.

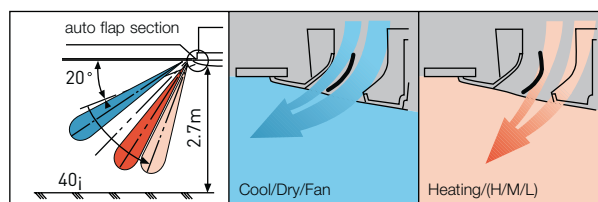

Drain up is possible up to 500mm via the built-in drain pump.

Maintenance of the drain pump is possible from both sides, from the left side (piping side) and from the inside of the unit.

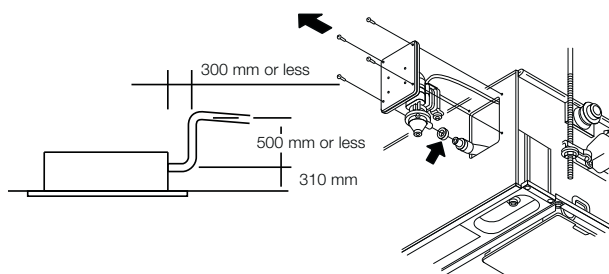

Simple maintenance

The drain pan is equipped with site wiring and can be removed. The fan case has a split construction, and the fan motor can be removed easily when the lower case is removed.

PANEL

CZ-02KPL2

Big size panel (for S-73ML1E5)
CZ-03KPL2

CZ-RTC5A




CZ-RWSL2N

Model Name			S-22ML1E5	S-28ML1E5	S-36ML1E5	S-45ML1E5	S-56ML1E5	S-73ML1E5
Power source			220/230/240V, 1 phase - 50 / 60Hz					
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6	7.3
	BTU/h		7,500	9,600	12,000	15,000	19,000	25,000
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h		8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.086/0.090/0.095	0.086/0.092/0.097	0.088/0.093/0.099	0.091/0.097/0.103	0.091/0.097/0.103	0.135/0.145/0.154
	Heating	kW	0.055/0.058/0.062	0.055/0.060/0.064	0.057/0.061/0.066	0.060/0.065/0.070	0.060/0.065/0.070	0.100/0.109/0.117
Running current	Cooling	A	0.45/0.45/0.45	0.44/0.45/0.45	0.44/0.45/0.45	0.45/0.45/0.45	0.45/0.45/0.45	0.64/0.65/0.66
	Heating	A	0.29/0.29/0.30	0.28/0.29/0.30	0.28/0.29/0.30	0.29/0.29/0.30	0.29/0.29/0.30	0.46/0.48/0.49
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	480/420/360	540/480/420	580/520/460	660/540/480	660/540/480	1,140/960/840
		L/s	133/117/100	150/133/117	161/144/128	183/150/133	183/150/133	317/267/233
	Motor output	kW	0.03	0.03	0.03	0.03	0.03	0.05
Sound power level (H/M/L)			dB	40/38/35	44/40/37	45/42/39	46/44/40	46/44/40
Sound pressure level (H/M/L)			dB(A)	30/27/24	33/29/26	34/31/28	35/33/29	35/33/29
Dimensions* H x W x D			mm	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x840 (1,060) x600 (680)	350+(8)x 1,140 (1,360) x600 (680)
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
Net weight*			kg	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	30 (+9)
GLOBAL REMARKS	Rated conditions:		Cooling	Heating	*The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications are subject to change without notice.			
	Indoor air temperature		27°C DB / 19°C WB	20°C DB				
	Outdoor air temperature		35°C DB / 24°C WB	7°C DB / 6°C WB				

L1 TYPE 2-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Air outlet
- 3 Ceiling opening dimensions
- 4 Suspension fitting (notch: 12mm)
- 5 Refrigerant piping (liquid pipes)
- 6 Refrigerant piping (gas pipes)
- 7 Drain connection VP25 (outer diameter ø32)
- 8 Inlet for option cord between power supply and unit
- 9 Drain pan, drain pump inspection lid
- 10 Drain pump inspection lid
- 11 Round flange (field supply) mounting part (fresh air inlet ø125)
- 12 Discharge duct (field supply) mounting part (installation possible only on the right side)
- 13 Wireless remote controller (option) signal receiver installation part

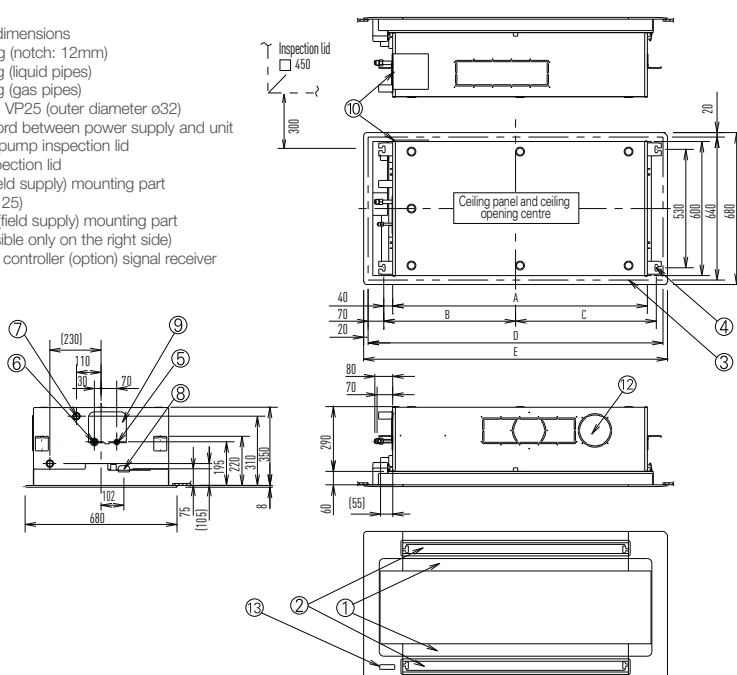

	22~56 type	73 type
A	840	1,140
B	440	590
C	480	630
D	1,020	1,320
E	1,060	1,360
③ Ceiling opening dimensions	1,020x640	1,320x640
⑤ Refrigerant piping (liquid pipes)	ø6.35	ø9.52
⑥ Refrigerant piping (gas pipes)	ø12.7	ø15.88
⑫ Duct connection port (only on the right side)	⑫ x 1 pc.	⑫ x 2 pc.

unit: mm

D1_{TYPE} 1-WAY Cassette

Semi concealed slim cassette



Designed for installation within the ceiling void, the D1 range of slimline 1 way cassettes feature a quiet yet powerful fan that can reach the floor up 4.2m from ceiling height.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)




Built-in Drain
Pump

Technical focus

- Ultra-Slim profile
- Suitable for standard and high ceilings
- Built-in drain pump provides 590mm lift from ceiling
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC fan motor to improve energy efficiency

Drain height

A built-in drain pump provides up to 590mm lift from ceiling height for flexible install options.

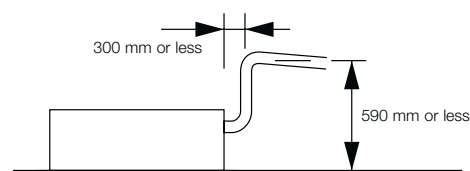

With 3 types of air-blow systems, the units can be used in various ways.



(1) One-direction “down-blow” system

Powerful one-direction “down-blow” system reaches the floor even from high ceilings (up to 4.2m).



(2) Two-direction ceiling-mounted system

“Down-blow” and “front-blow” systems are combined in a ceiling-mounted unit to blow air over a wide area.



(3) One-direction ceiling-mounted system

This powerful ceiling-mounted “front-blow” system efficiently air-conditions the space in front of the unit.
(Additional accessories required)

PANEL

CZ-KPD2



CZ-RTC5A




CZ-RWSD2

Model Name		S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5
Power source		220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.3
	BTU/h	9,600	12,000	15,000	19,000	25,000
Heating capacity	kW	3.2	4.2	5.0	6.3	8.0
	BTU/h	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.050/0.051/0.052	0.050/0.051/0.052	0.050/0.051/0.052	0.058/0.060/0.061	0.086/0.087/0.089
	Heating kW	0.039/0.040/0.042	0.039/0.040/0.042	0.039/0.040/0.042	0.046/0.048/0.049	0.075/0.076/0.077
Running current	Cooling A	0.40/0.39/0.39	0.40/0.39/0.39	0.40/0.39/0.39	0.46/0.46/0.46	0.71/0.70/0.69
	Heating A	0.36/0.35/0.35	0.36/0.35/0.35	0.36/0.35/0.35	0.42/0.41/0.41	0.66/0.65/0.63
Fan	Type	Sirocco fan				
	Air flow rate (H/M/L)	m ³ /h	720/600/540	720/660/600	780/690/600	1,080/900/780
		L/s	200/167/150	200/183/167	217/192/167	300/250/217
	Motor output kW	0.05	0.05	0.05	0.05	0.05
Sound power level (H/M/L)		dB	47/45/44	47/46/45	49/47/45	56/51/47
Sound pressure level (H/M/L)		dB(A)	36/34/33	36/35/34	38/36/34	45/40/36
Dimensions* H x W x D		mm	200+20 x 1,000 (1,230) x 710 (800)	200+20 x 1,000 (1,230) x 710 (800)	200+20 x 1,000 (1,230) x 710 (800)	200+20 x 1,000 (1,230) x 710 (800)
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25
Net weight*		kg	21 (+5.5)	21 (+5.5)	21 (+5.5)	22 (+5.5)
GLOBAL REMARKS	Rated conditions:	Cooling	Heating	*The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications are subject to change without notice.		
	Indoor air temperature	27°C DB / 19°C WB	20°C DB			
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB			

D1 TYPE 1-WAY CASSETTE Dimensions

- 1 Air intake grille
- 2 Air outlet
- 3 Refrigerant piping (liquid pipes)
Size 28 to 56: Ø6.35 (flared)
Size 73: Ø9.52 (flared)
- 4 Refrigerant piping (gas pipes)
Size 28 to 56: Ø12.7 (flared)
Size 73: Ø15.88 (flared)
- 5 Drain connection VP25 (outer Ø32)
- 6 Power supply entry
- 7 Discharge duct connection port (for descending ceiling)
- 8 Wireless remote control receiver (option)
- 9 Suspension mounting (4-12 x 30 slot)
- 10 Fresh air intake (Ø100)

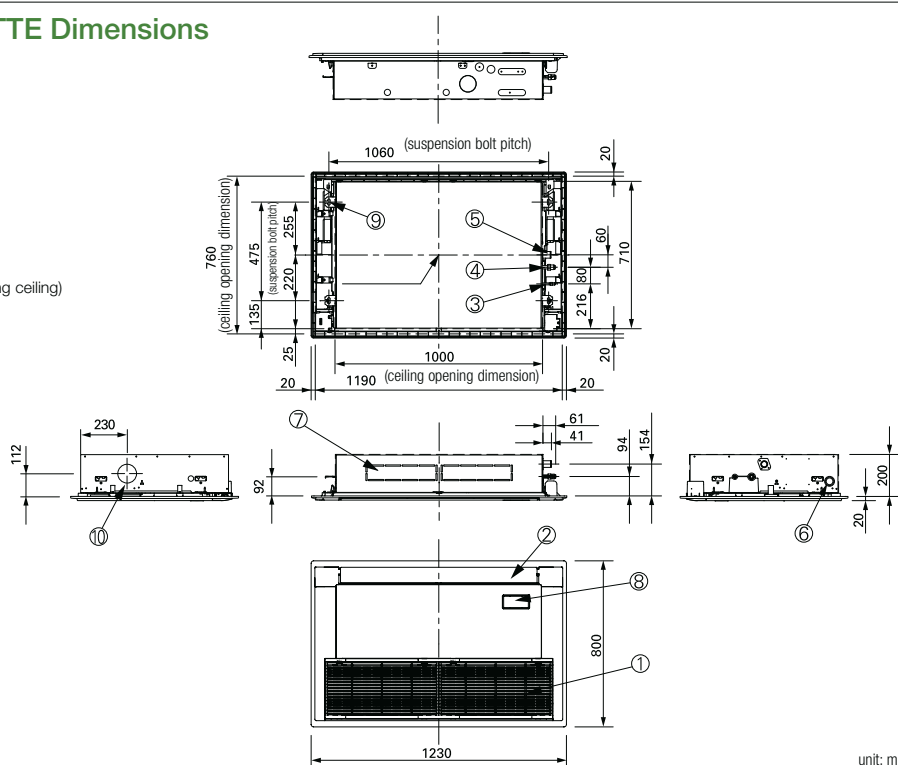

unit: mm

T2_{TYPE} Ceiling

Ceiling mounted



Providing outstanding energy-saving performance and comfortable, long-distance air flow distribution, it's recommended for stores and schools.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)

Technical focus

- Lower sound levels
- Standardised height and depth for all models
- Long and wide air distribution
- Easy to install and maintain
- Fresh air knockout

Compact looking, stylish, one-motion design

With its streamlined, one-motion form, the unit looks slim and compact when installed for a neat appearance in any room. When not operating, the louvre closes to provide an elegant look while keeping the unit clean.



Energy-saving technology delivering top-class efficiency


Shape optimisation of the casing and fan assures bigger air flow and higher efficiency. Top class energy-saving performance within the industry.

Top Class Energy Saving

Large Diagonal Air Flow Fan




DC monitor



Comfortable, long-distance air flow distribution

The shape of the outlet has been optimised to provide long-distance air flow distribution. Even in deep spaces, air flow reaches every corner for exceptionally comfortable air conditioning.


High Ceiling Setting <small>*Setting by remote control</small>	Air flow distance		
	112	140	160
4.3m	12m	13m	13m

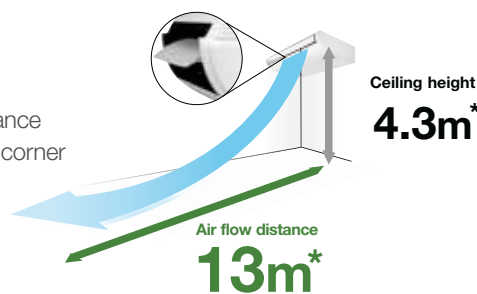

*Results are based on specific testing conditions.

Multiple piping directions for flexible installation

The 5-directional drain pipe and 3-directional refrigerant pipe make installation much easier. And the neat fit with walls and ceilings assures more installation flexibility.

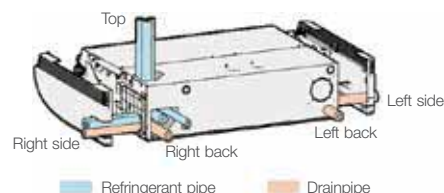



Model Name			S-36MT2E5A	S-45MT2E5A	S-56MT2E5A	S-73MT2E5A	S-106MT2E5A	S-140MT2E5A
Power source			220 / 230 / 240 V, 1 phase - 50 / 60 Hz					
Cooling capacity	kW		3.6	4.5	5.6	7.3	10.6	14.0
	BTU/h		12,300	15,400	19,100	24,900	36,200	47,800
Heating capacity	kW		4.2	5.0	6.3	8.0	11.4	16.0
	BTU/h		14,300	17,100	21,500	27,300	38,900	54,600
Power input	Cooling	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
	Heating	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
Running current	Cooling	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
	Heating	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	840/720/630	900/750/630	900/750/630	1,260/1,080/930	1,800/1,500/1,380	1,920/1,680/1,440
		L/s	233/200/175	250/208/175	250/208/175	350/300/258	500/417/383	533/467/400
	Motor output	kW	0.043	0.043	0.043	0.074	0.111	0.111
Sound power level (H/M/L)		dB	54/50/48	55/51/48	55/51/48	57/53/51	60/55/54	62/58/55
Sound pressure level (H/M/L)		dB(A)	36/32/30	37/33/30	37/33/30	39/35/33	42/37/36	44/40/37
Dimensions	H x W x D	mm	235 x 960 x 690	235 x 960 x 690	235 x 960 x 690	235 x 1,275 x 690	235 x 1,590 x 690	235 x 1,590 x 690
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
Pipe connections	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	27	27	27	33	40	40


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

T2 TYPE CEILING Dimensions


S-36MT2E5A / S-45MT2E5A / S-56MT2E5A

1 Drain port VP20	Inside diameter ø26mm, drain hose supplied
2 Left drain position	
3 Refrigerant liquid piping	Ø6.35mm for 36-56type, Ø9.52mm for 73-140type
4 Refrigerant gas piping	Ø12.7mm for 36-56type, Ø15.88mm for 73-140type
5 Left side drain hose outlet port (cutout)	
6 Piping hole on wall surface	Ø100mm
7 Upper side piping port	
8 Right side drain hose outlet port (cutout)	
9 Wireless remote controller receiver installation location	

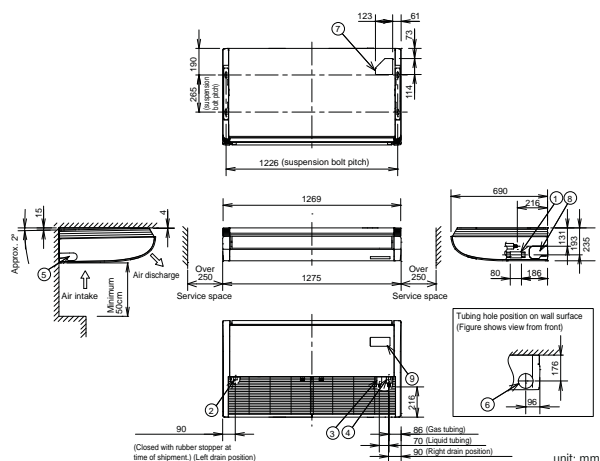

S-73MT2E5A / S-106MT2E5A / S-140MT2E5A

	A	B	C	D	E
106-140 type	1,590	235	690	1,584	1,541
73 type	1,275	235	690	1,269	1,226

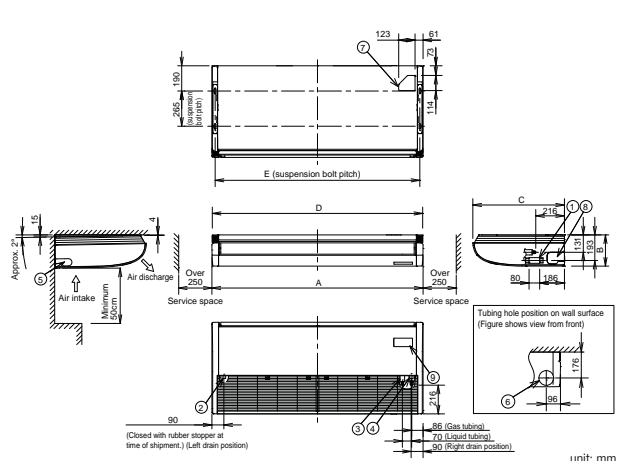

P1_{TYPE} Floor Standing

The compact floor standing P1 units are the ideal solution for providing perimeter air conditioning. A standard wired controller can be incorporated into the body of the unit.



Self-diagnosing
Function



Automatic
Fan
Operation




Automatic
Restart
Function

Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible air flow

Effective perimeter air conditioning

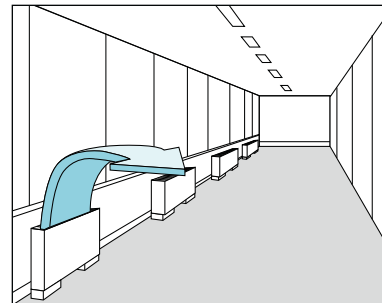

CZ-RWSK2 +
CZ-RWSC3

Model Name			S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Power source			220/230/240 V, 1 phase - 50 / 60 Hz					
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h		7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h		8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating	kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling	A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating	A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	420/360/300	420/360/300	540/420/360	720/540/480	900/780/660	1,020/840/720
		L/s	117/100/83	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output	kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)		dB	44/41/39	44/41/39	50/46/40	49/46/42	50/47/42	52/49/46
Sound pressure level (H/M/L)		dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D	mm	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,380 x 230	615 x 1,380 x 230	615 x 1,380 x 230
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
Drain piping			VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	29	29	29	39	39	39

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications are subject to change without notice.

P1 TYPE FLOOR STANDING

Dimensions

- 1 4 x Ø12 holes (for floor fixing)
- 2 Power supply outlet
- 3 Air filter
- 4 Refrigerant piping (liquid pipes)
- 5 Refrigerant piping (gas pipes)
- 6 Level adjustment bolt
- 7 Drain outlet VP20 (with vinyl hose)
- 8 Refrigerant switch connection port (bottom or rear)
- 9 Operation switch (remote controller RCS-SH80AG) mounting part
- 10 Electric equipment box
- 11 Accessory copper pipe for gas pipe connection

Indoor unit	A	B	C	Liquid pipes	Gas pipes
22 to 36 type	1,065	665	632	Ø6.35	Ø12.7
45 type	1,380	980	947		
56 type				Ø9.52	Ø15.88
71 type					

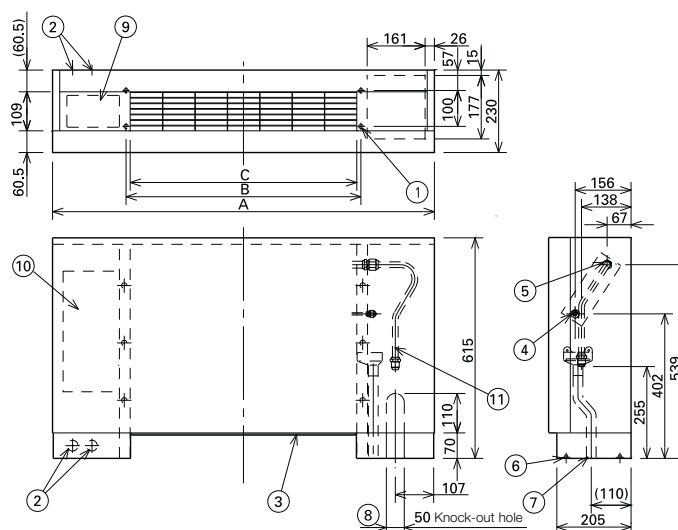

unit: mm

R1 TYPE Concealed Floor Standing

At just 229mm deep, the R1 unit can be easily concealed in perimeter areas to provide powerful and effective air conditioning.



Self-diagnosing
Function



Automatic
Fan
Operation



Mild dry




Automatic
Restart
Function

Technical focus

- Chassis unit for discrete customisable installation
- Complete with removable filters
- Pipes can be connected to the unit either from the bottom or rear
- Easy to install

Effective perimeter air conditioning

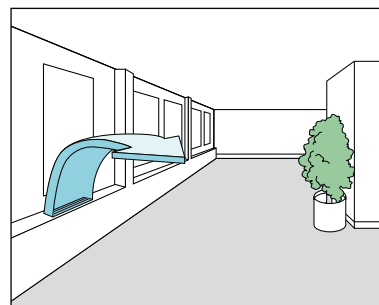



CZ-RTC5A

CZ-RWSK2+
CZ-RWSC3


Model Name		S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Power source		220/230/240 V, 1 phase - 50, 60 Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type	Sirocco fan					
	Air flow rate (H/M/L)	m ³ /h	420/360/300	420/360/300	540/420/360	720/540/480	900/780/660
		L/s	117/100/183	117/100/183	150/117/100	200/150/133	250/217/183
	Motor output	kW	0.01	0.01	0.02	0.02	0.03
Sound power level (H/M/L)		dB	44/41/39	44/41/39	50/46/40	49/46/42	52/49/46
Sound pressure level (H/M/L)		dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31
Dimensions	H x W x D	mm	616 x 904 x 229	616 x 904 x 229	616 x 904 x 229	616 x 1,219 x 229	616 x 1,219 x 229
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas 410 A	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	21	21	21	28	28

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

R1 TYPE CONCEALED FLOOR STANDING Dimensions

- 1 4 x Ø12 holes (for floor fixing)
- 2 Electric equipment box
- 3 Power supply outlet
- 4 Air filter
- 5 Discharge duct connection flange
- 6 Refrigerant connection outlet (liquid pipes)
- 7 Refrigerant connection outlet (gas pipes)
- 8 Drain filter
- 9 Drain pan
- 10 Level adjustment bolt
- 11 Drain outlet VP20 (with vinyl hose)

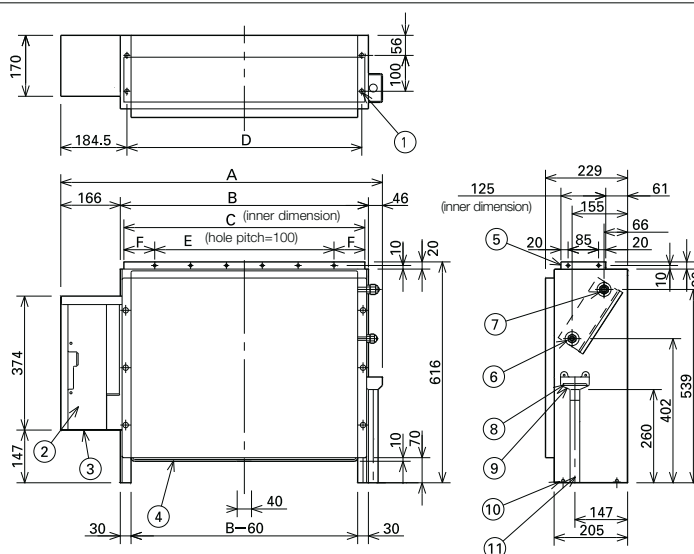

unit: mm

Indoor unit	A	B	C	D	E	F	Liquid pipes	Gas pipes
22 to 36 type	904	692	672	665	500	86	Ø6.35	Ø12.7
45 type	1,219	1,007	1,002	980	900	51		
56 type								
71 type								

Installation Conditions - High Static Ducted Series







E2 type
High Static Ducted



E2 type
**Energy Saving
High-Fresh Air Ducted**



E1 type
High Static Ducted





Model	Operation	Rap valve kit CZ-P160RVK2 	3way control PCB CZ-CAPE2 	3way valve kit CZ-P160HR3 	3-way valve kit multiple connection port type 4 port CZ-P4160HR3 (160 type)  X 4pcs	Distribution Joint kit <2pipes> CZ-P160BK2 for 22.4kW unit or less CZ-P680BK2 for more than 22.4kW	Distribution Joint kit <3pipes> CZ-P224BH2 for 22.4kW unit CZ-P680BH2 for 28.0kW unit
E2 Type High Static Ducted	Cooling Only	-	-	-	-	-	-
	Cool or Heat	-	-	-	-	-	-
	Heat Recovery	-	2pcs	2pcs	use 2ports	1pc	1pc
E2 Type Energy Saving High-Fresh Air Ducted	Cooling Only	-	-	-	-	-	-
	Cool or Heat	2pcs	2pcs	-	-	2pcs	-
	Heat Recovery	-	2pcs	2pcs	use 2ports	1pc	1pc
E1 Type High Static Ducted (Only for S-224,S-280)	Cooling Only	-	-	-	-	-	-
	Cool or Heat	2pcs	-	-	-	2pcs	-
	Heat Recovery	-	-	2pcs	use 2ports	1pc	1pc

Note: Refer to Technical Documents for further detail.





FSV Controllers

A wide variety of control options to meet the requirements of different applications.

OPERATION SYSTEM	INDIVIDUAL CONTROL SYSTEMS			CENTRALISED CONTROL SYSTEMS	
Requirements	Advanced operation	Normal operation	Operation from anywhere in the room	Operation with various functions from a central location	
External appearance					
Type, model name	Deluxe Wired Remote Controller CZ-RTC5A	Timer Remote Controller (Wired) CZ-RTC4	Wireless Remote Controller CZ-RWSU3 CZ-RWSL2N CZ-RWSC3 CZ-RWSD2 CZ-RWST3N CZ-RWSK2	System Controller CZ-64ESMC3	
Built-in thermostat	●	●	●	—	
ECONAVI ON/OFF control	●	●	—	●	
Number of indoor units which can be controlled	1 group, 8 units	1 group, 8 units	1 group, 8 units	64 groups, max. 64 units	
Use limitations	· Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	· Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	· Up to 2 controllers can be connected per group.	· Up to 10 controllers, can be connected to one system. · Main unit/sub unit (1 main unit + 1 sub unit) connection is possible. · Use without remote controller is possible.	
Function ON/OFF	●	●	●	●	
Mode setting	●	●	●	●	
Fan speed setting	●	●	●	●	
Temperature setting	●	●	●	●	
Air flow direction	●	●	●	●	
Permit/Prohibit switching	—	—	—	●	
Weekly program	●	●	—	●	

All specifications are subject to change without notice.



	Only ON/OFF operation from a central location	Simplified load distribution ratio (LDR) for each tenant 10.4" touch screen panel colour LCD	Connection with 3rd Party Controller
			
	ON/OFF Controller	Intelligent Controller	
	CZ-ANC3	CZ-256ESMC3 (CZ-CFUNC2)	
	—	—	
	—	●	
	16 groups, max. 64 units	64 units x 16 systems, max. 256 units	
	· Up to 8 controllers (4 main units + 4 sub units) can be connected to one system. · Use without remote controller is impossible.	· A communication adaptor (CZ-CFUNC2) must be installed for three or more links.	
	●	●	
	—	●	
	—	●	
	—	●	
	—	●	
	●	●	
	—	●	

Seri-Para I/O unit for outdoor unit



CZ-CAPDC2

Interface Adaptor



CZ-CAPC3

Seri-Para I/O unit for each indoor unit



CZ-CAPBC2

Communication Adaptor



CZ-CFUNC2

LonWorks Interface



CZ-CLNC2

ECONAVI ECONAVI Sensor

CZ-CENSC1




Utilises ECONAVI Sensor and Control Program technologies to detect where energy is normally wasted and self-adjusts cooling power to reduce energy waste.

- Activity detection
- Absence detection

Individual Control Systems

Control contents	Part name, model No.	Quantity
Standard Control <ul style="list-style-type: none"> Control of the various operations of the indoor unit by wired or wireless remote controller. Cooling or heating mode of the outdoor unit is decided by the first priority of the remote controller. Switching between remote controller sensor and body sensor is possible. 	Timer remote controller CZ-RTC4 / CZ-RTC5A Wireless remote controller CZ-RWSU3 / CZ-RWSL2N / CZ-RWSC3 / CZ-RWSK2 / CZ-RWST3N / CZ-RWSD2	1 unit each
(1) Group control <ul style="list-style-type: none"> Batch remote control on all indoor units. Operation of all indoor units in the same mode. Up to 8 units can be connected. The sensor is the body sensor, and thermostat ON/OFF setting in regard to the temperature set by the remote controller is possible for each indoor unit. 	Timer remote controller CZ-RTC4 / CZ-RTC5A Wireless remote controller CZ-RWSU3 / CZ-RWSL2N / CZ-RWSC3 / CZ-RWSK2 / CZ-RWST3N / CZ-RWSD2	1 unit
(2) Main/sub remote control <ul style="list-style-type: none"> Max 2 remote controllers per indoor unit. (Main remote controller can be connected) The button pressed last has priority. Timer setting is possible even with the sub remote controller. (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit) 	Main or sub Timer remote controller CZ-RTC4 / CZ-RTC5A Wireless remote controller CZ-RWSU3 / CZ-RWSL2N / CZ-RWSC3 / CZ-RWSK2 / CZ-RWST3N / CZ-RWSD2	As required

SYSTEM EXAMPLE FSV

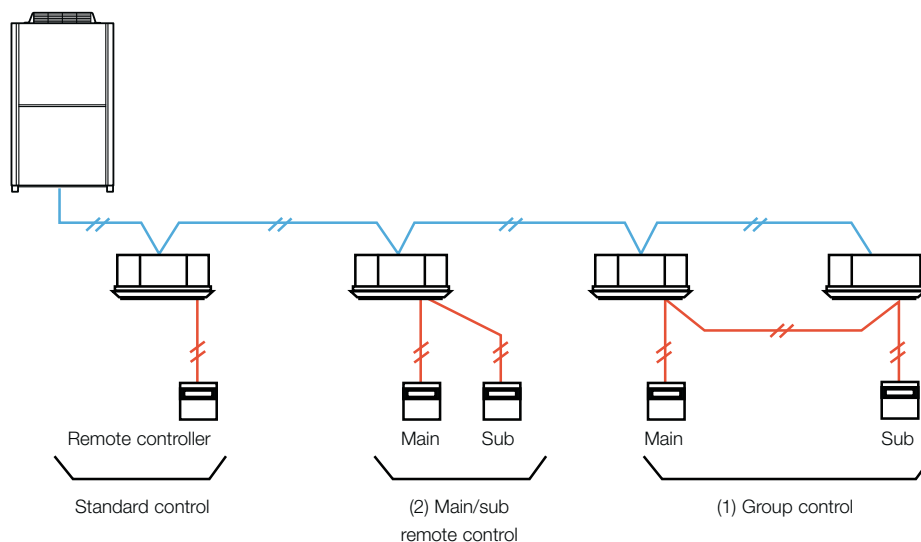

Deluxe wired remote controller (CZ-RTC5A)



Dimensions
H 120 x W 120 x
D 16mm

Energy Saving

- ECONAVI on/ off*
- Temperature Auto Return
- Temperature Setting Range
- Auto Shutoff
- Schedule peak cut
- Repeat off timer

Basic Operation

- Individual Louvre Control - Lock individual flap (only for 4-way cassette U2 type)
- ON/ OFF timer
- Weekly Timer
- Filter information*
- Outing function
- Quiet operation mode*
- Energy saving
- Initial settings
- Ventilation

Maintenance Function

- Outdoor unit error data
- Service Contact address
- RC setting mode
- Test Run
- Sensor Information
- Service check
- Simple/ Detailed Settings
- Auto address

* Depending on the model, some functions cannot be used.

Timer remote controller (CZ-RTC4)



Dimensions
H 120 x W 120 x
D 20mm

Basic remote controller ON/OFF

- Operation mode changeover (Cooling, Heating, Dry, Auto, Fan).
- Temperature setting (Cooling/Dry: 18-30 deg Heating: 16-30 deg).
- Fan speed setting H/ M/ L and Auto.
- Air flow direction adjustment.
- ECONAVI on/ off*

Time Function 24 hours real time clock

- Day of the week indicator.

Weekly Programme Function

- A maximum of 6 settings/day and 42 settings/week can be programmed.

Outing Function

- This function can prevent the room temperature from dropping or rising when the occupants are out for a long time.

Sleeping Function

- This function controls the room temperature for comfortable sleeping.

Max. 8 indoor units can be controlled from one remote controller

Remote control by main remote controller and sub controller is possible

Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

* Depending on the model, some functions cannot be used.

Wireless remote controller



Remote control by main remote controller and sub controller is possible

- Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

When CZ-RWSC3 is used, wireless control becomes possible for all indoor units


- When a separate receiver is set up in a different room, control from that room also becomes possible.
- Automatic operation by means of the emergency operation button is possible even when the remote controller has been lost or the batteries have been exhausted.

In addition, there are other functions such as temperature setting, operation switching, airflow direction/fan speed setting, etc

Ventilation independent operation is possible

When commercial ventilation fans or heat-exchange ventilation fans have been installed, they can be operated with this remote control (interlocked operation with the indoor unit or independent ventilation ON/OFF).

ON/OFF controller (CZ-ANC3)



Dimensions
H 121 x W 122 x D 14 + 52
(embedding dimension mm)

Power supply: AC 220 to 240 V
I/O part: Remote input (effective voltage: within DC 24 V): All ON/OFF
Remote output (allowable voltage: within DC 30 V): All ON,
All alarm

- 16 groups of indoor units can be controlled.
- Collective control and individual group (unit) control can also be performed.
- Up to 8 ON/OFF controller (4 main, 4 sub) can be installed in one link system.
- The operation status can be determined immediately.

Note: As operation mode and temperature settings are not possible with the ON/OFF controller, it must be used together with a remote controller, a system controller etc.

Centralised Control Systems

System controller (CZ-64ESMC3)



Dimensions
H 120 x W 120 x D 16 + 52
(embedding dimension mm)

Power supply: AC 100 to 240 V
I/O part:
Remote input part (effective voltage: DC24V) All operation, All stop, Demand 1, Demand 2
Remote output part (non voltage contact) Operation, Alarm (external power supply within DC 30V, max 0.5A)
Total wiring length : 1 km

Individual control is possible for max 64 groups, 64 indoor units.

- Control of 64 indoor units divided into 4 zones. (One zone can have up to 16 groups, and one group can have up to 8 units.)
- Control is possible for ON/OFF, operation mode, fan speed, air flow direction, operation monitoring, alarm monitoring, ventilation, remote controller local operation prohibition, etc.

Prohibition setting for Remote controller operation

Setting mode	ON/OFF	Mode	Temperature	Fan speed	Flap
Permit	●	●	●	●	●
Prohibit 1	—	●	●	●	●
Prohibit 2	—	—	—	●	●
Prohibit 3	●	—	—	●	●
Prohibit 4	●	—	●	●	●

In case of joint use with a wireless remote controller, there are limitations for the control mode. Please use only with setting "Permit" and "Prohibit1 (prohibition for ON/OFF)".

*Contents for Prohibit 1~4 can be modified.

● : Operation from the remote controller is possible.

— : Operation from the remote controller is prohibited.

- Joint use with a remote controller, an intelligent controller, etc. is possible
(The maximum number of connectable system controllers is 10, including other central controllers on the same circuit.)
(In case of joint use with a wireless remote controller, there are limitations for the control mode. Please use only with setting "Permit" and "Prohibit1 (prohibition for ON/OFF)".)
- Control of systems without a remote controller and of main/sub systems (a total of up to 2 units) is possible
- Weekly timer function
 - 8 programs per day (with ON/OFF/Mode/Temperature/Central control setting items) for 1 week (7 days) can be set.
 - Special holiday setting can ignore the timer operation temporary by keeping original timer setting. (Special holiday setting can be removed by same setting display.)
- 5 types of Energy saving function
 - Set temperature automatic return / Set temperature range limitation / Off remind / Off timer operation / Demand control timer

- A control mode corresponding to the use condition can be selected from 10 patterns

A : Operation mode: Central control mode or remote control mode can be selected

Central control mode: The system controller is used as centralised control device. (Setting from a remote controller can be prohibited by prohibiting local operation from the system controller.)


Remote control mode: The system controller is used as a remote controller. (Setting from the system controller can be prohibited by prohibiting local operation from another central control unit.)

B : Controlled unit number mode: All mode or zone 1, 2, 3, 4 mode can be selected

All mode: All, zone, or group unit can be selected.

Zone 1, 2, 3, 4 mode: Setting is possible only for the indoor units of zone 1, 2, 3, or 4.

Connection example		A Operation mode	
		Central control mode	Remote control mode
B Controlled unit number mode	All mode	All central control Example 1	All remote control
	Zone 1 mode	Zone 1 central control Example 2	Zone 1 remote control
	Zone 2 mode	Zone 2 central control	Zone 2 remote control Example 3
	Zone 3 mode	Zone 3 central control Example 4	Zone 3 remote control
	Zone 4 mode	Zone 4 central control	Zone 4 remote control Example 5

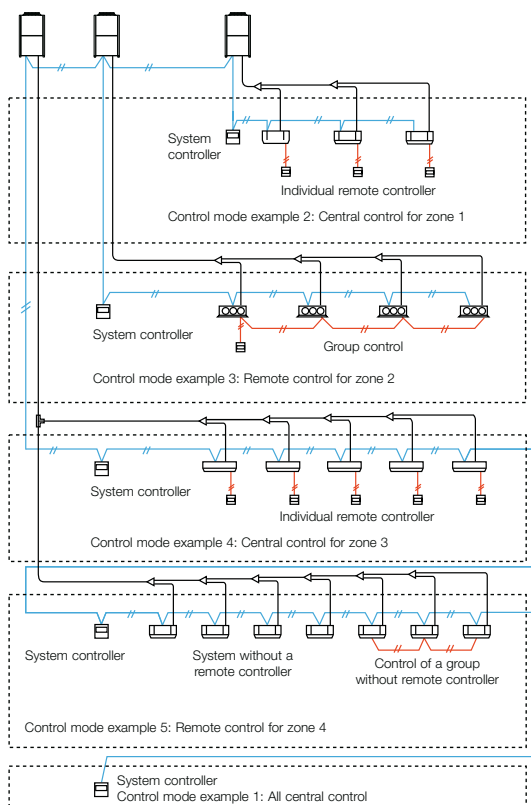

Intelligent controller (CZ-256ESMC3)



Touch panel

Dimensions
H 240 x W 280 x D 85mm
Power supply AC 100 to 240 V (50/60 Hz)
LCD: 10.4" TFT, XGA(1024 x 768), LED backlight

Product Features

- **10.4", Large, easy-to-use colour LCD**
 - With smartphone like operations, such as swiping and flicking
- **Enhanced energy-saving control functions**
 - Packed with demand functions
 - Set temperature auto return settings, Auto shutoff, Set temperature range limit settings
- **Energy Visualization**
 - Displays electricity & gas usage distribution
 - Supports energy-saving plans with graph display function

New Features

- **Max 256 indoor unit (16 systems x 64 units) can be controlled.** In case of three or more systems (more than 128 units), a communication adapter CZ-CFUNC2 must be installed for three or more links.
- **Operation is possible as batch, in zone units, and in group units.**
- **ON/OFF, operation mode setting, temperature setting, for fan speed setting, air flow direction setting (when used without a remote controller) and remote controller local operation prohibition (prohibition 1,2,3,4) can be done**
- **Graph display (trends, comparisons)**
- **ECONAVI ON/OFF**

- **Outdoor unit quiet operation ON/OFF**
- **Energy-saving Functions**
- **Event control [such as equipment linkage]**
- **Limitation contents for prohibited operation**

Prohibition means limitation of the operation contents from the remote controller. It is also possible to change the prohibition items.

Limitation contents (Limitations can be user defined)

Individual	There is no limitation for the operation of the remote controller. However, the contents will be changed to the contents of the controller operated last. (Last-pressed priority)
Prohibition 1	The remote controller cannot be used for ON/OFF. (All other operations are possible from the remote controller.)
Prohibition 2	The remote controller cannot be used for ON/OFF, operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 3	The remote controller cannot be used for operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 4	The remote controller cannot be used for operation mode change. (All other operations are possible from the remote controller.)

• Remote Control

The LAN terminal on this unit enables you connect it to a network. Connecting to internet will enable you to operate the unit and check the status using a PC from remote location.



Display image on the remote PC is same design as the controller unit.


T10 Terminal for External Control (Digital Connection)

Connecting an FSV indoor unit to an external device is easy.
The T10 Terminal featured in the electronic circuit board of all indoor units enables digital connection to external devices.




1. T10 Terminal Specification (T10:CN061 at indoor unit PCB)

- **Control items:**
 1. Start/stop input (eg hotel key card, push button operation)
 2. Remote controller prohibit input
 3. Operation status output (eg fresh air fan)
 4. Fault status output

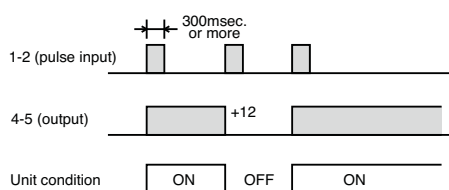

NOTE: The wire length from indoor unit to the Relay must be within 2.0m.
Pulse signal changeable to static with JP cutting. (Refer to JP001)

• Example of wiring



Condition

1. 1-2 (Pulse input): Unit ON/OFF condition switching with a pulse signal. (1 pulse signal: shortage status more than 300msec. or more)
2. 2-3 (Static input): Open/ Operation with Remote is permitted. (Normal condition) Close/ Remote controller is prohibited.
3. 4-5 (Static output): 12V output during the unit ON. / No output at OFF.
4. 5-6 (Static output): 12V output when some errors occur / No output at normal.


2. Usage Example

Forced OFF control

• Condition

1-2 (Static input): Close/ Operation with Remote is permitted. (Normal condition) Open/ Unit is forcibly OFF and Remote controller operation is prohibited.

• Example of wiring

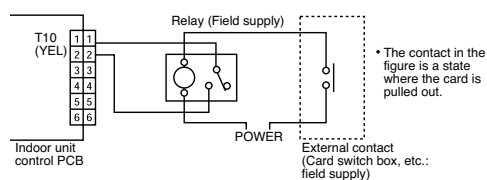


NOTE: The wire length from indoor unit to the Relay must be within 2.0m

Operation ON/OFF signal output

• Condition

4-5 (Static output): 12V output during the unit ON / No output at OFF

• Example of wiring

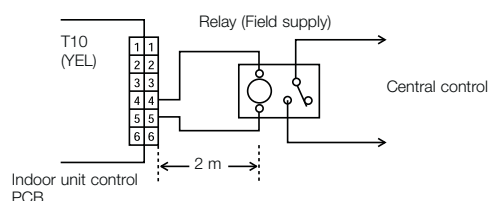


NOTE: The wire length from indoor unit to the Relay must be within 2.0m
Pulse signal changeable to static with JP cutting. (Refer to JP001)

Interfaces for External Control (Digital Connection)

Seri-Para I/O unit for each indoor unit (CZ-CAPBC2)



System example

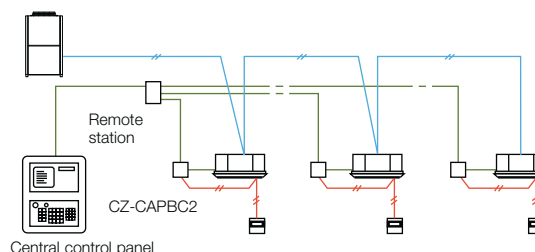


- Control and status monitoring is possible for individual indoor unit (1 group).
- In addition to operation and stop, there is a digital input function for air speed and operation mode.
- Temperature setting and measuring of the indoor suction temperature can be performed from central monitoring.
- The analog input for temperature setting is 0 to 10V, or 0 to 140Ohm.
- Power is supplied from the T10 terminal of the indoor units.
- Separate power supply also is possible (in case of suction temperature measuring).

Interface adaptor (CZ-CAPC3)



System example

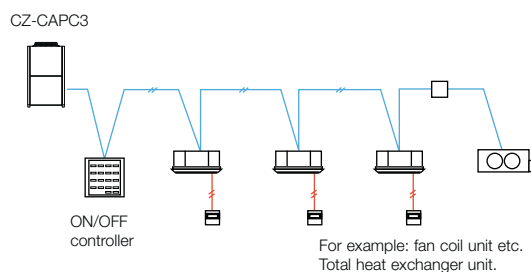


- Control and status monitoring is possible for individual indoor unit (or any external electrical device up to 250V AC, 10 A) by contact signal.

Seri-Para I/O unit for outdoor unit (CZ-CAPDC2)



System example

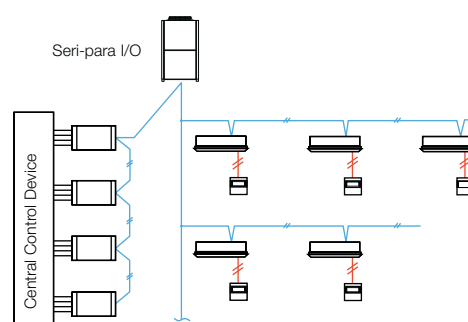


- This unit can control up to 4 outdoor units.
- From the centre control device, mode changing and batch operation/batch stop are possible.
- Required for demand control.

Dimensions	H 80 x W 290 x D 260mm
Power supply	Single phase 110-120/220-240 V (50/60 Hz), 18 W
Input	Batch operation/Batch stop (non-voltage contact/DC 24 V, pulse signal). Cooling/Heating (non-voltage contact/static signal). Demand 1/2 (non-voltage contact/static signal) (Local stop by switching)
Output	Operation output (non-voltage contact). Alarm output (non-voltage contact)
Wiring length	Indoor/Outdoor operation lines: Total length 1 km. Digital signal: 100m or shorter

Serial Interface for 3rd Party External Controller

Example of 3rd party BMS connection with CZ-CFUNC2
(For the detail please consult to authorized dealer)

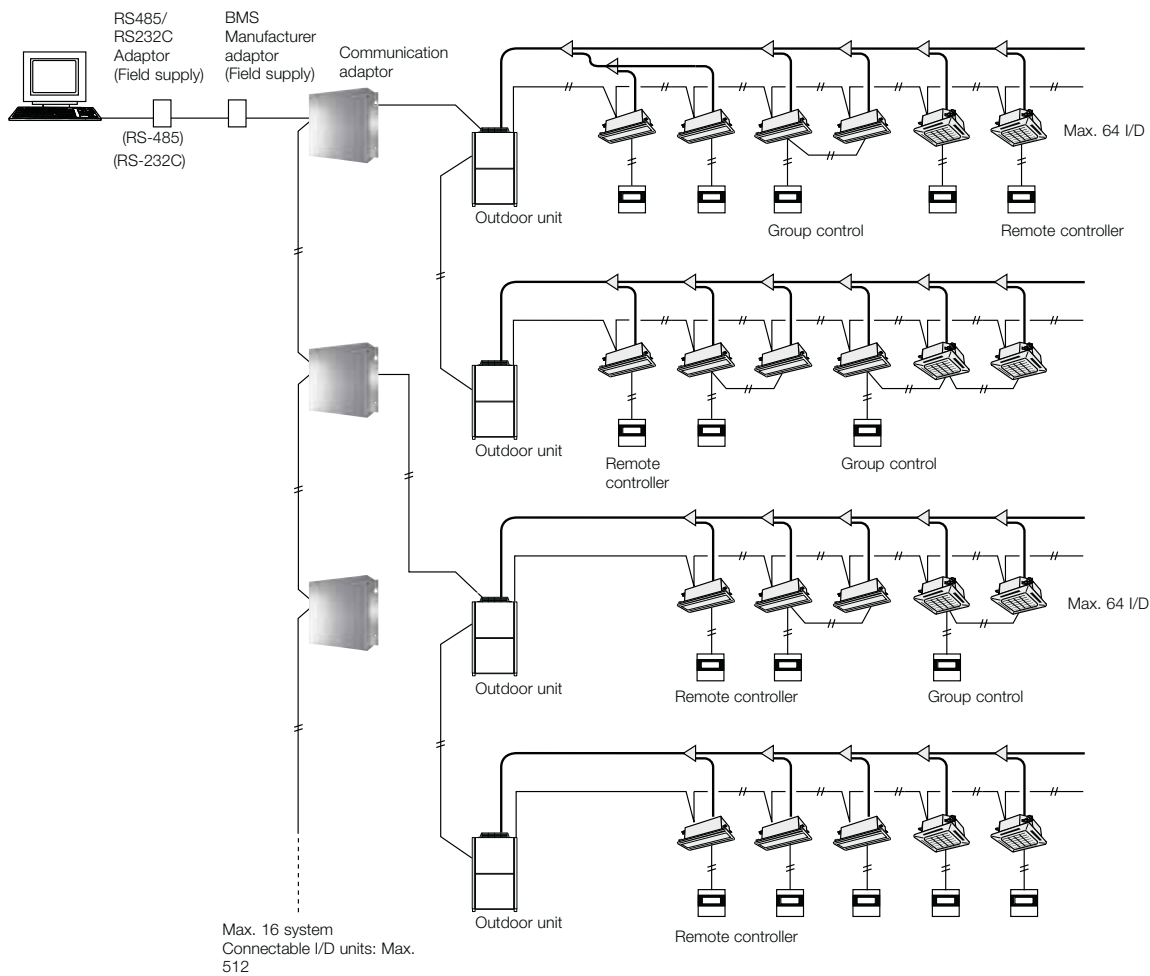

Functions via communication adaptor [CZ-CFUNC2]	
A/C unit settings	Unit ON/OFF
	Mode-change
	Room temperature setting
	Fan speed setting
	Flap setting
	Central control setting
	Filter-sign clear
	Alarm reset
A/C unit status	Unit ON/OFF status
	Operation mode
	Setting temperature
	Fan speed status
	Flap status
	Central control setting
	Filter-sign situation
	Correct/incorrect status
	Alarm code

Communication Adaptor (CZ-CFUNC2)



Up to 128 indoor units can be connected to one Communication Adaptor.


Serial Interface for LonWorks Network

LonWorks Interface (CZ-CLNC2)



- This interface is a communications converter for connecting LonWorks to the control network of FSV.
- From the host connected to LonWorks, basic settings and status monitoring is possible for up to 16 groups of indoor units.

System example

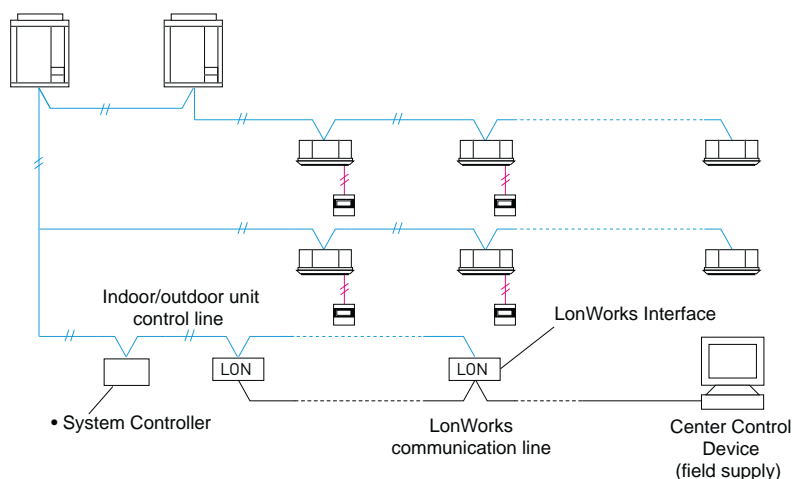


Functions


A/C unit settings from the LonWorks communicator	Settings for each group of indoor units	Start/stop
		Temp. setting
		Operation mode
		Option 1 settings
		Option 2 settings
A/C unit status notifications made to the LonWorks communicator	Settings for all units	Emergency stop
		Start/stop
		Temp setting
		Operation mode
		Option 1 settings
		Option 2 settings
		Alarm status
		Indoor units with active alarms
Configuration properties		Room temp.
		A/C unit status
		Transmission intervals settings
		Minimum time secured for transmission

FSV Controller External Dimensions


DELUXE
WIRED REMOTE
CONTROLLER
(CZ-RTC5A)




SEPARATE RECEIVER FOR
WIRELESS REMOTE
CONTROLLER
(CZ-RWSC3)

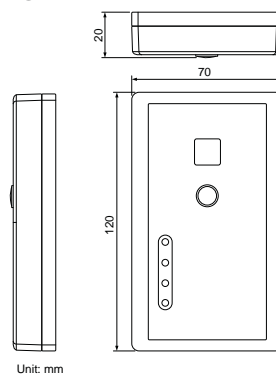


WIRELESS REMOTE
CONTROLLER




SYSTEM CONTROLLER
(CZ-64ESMC3)

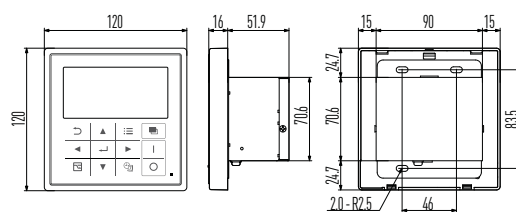


ECONAVI SENSOR
(CZ-CENSC1)

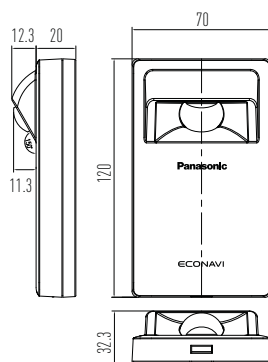


REMOTE SENSOR
(CZ-CSRC3)

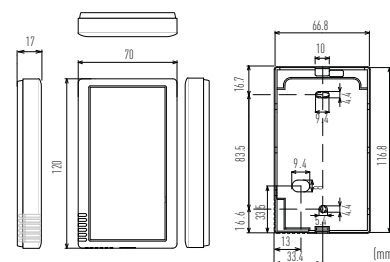


TIMER REMOTE CONTROLLER
(CZ-RTC4)

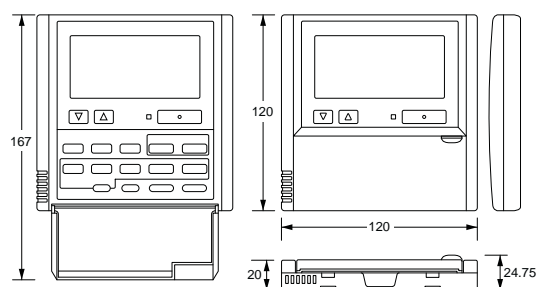


ON/OFF CONTROLLER
(CZ-ANC3)

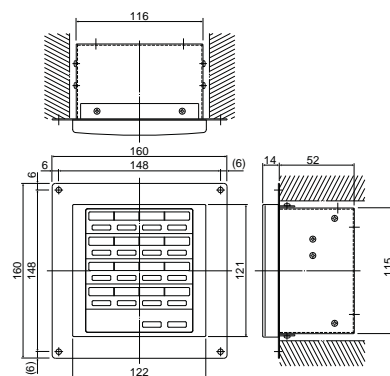


COMMUNICATION ADAPTOR
(CZ-CFUNC2)

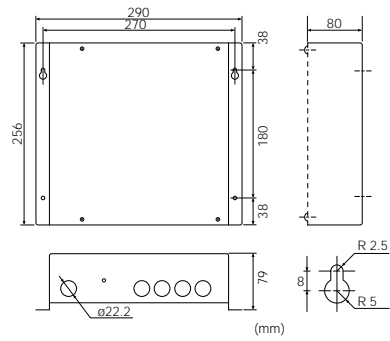


SERI-PARA I/O UNIT FOR OUTDOOR UNIT
(CZ-CAPDC2)

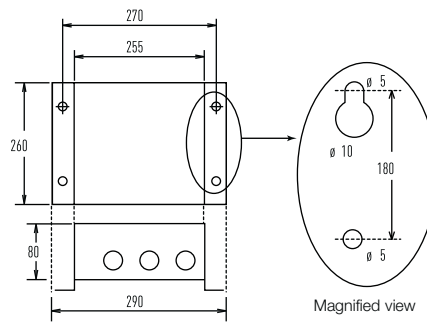

INTELLIGENT CONTROLLER
(CZ-256ESMC3)

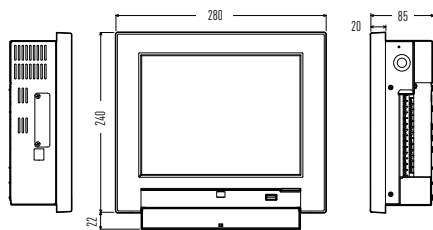

SERI-PARA I/O UNIT FOR EACH INDOOR UNIT
(CZ-CAPBC2)



VRF Renewal

An important drive to further reduce the potential damage to our ozone



R22 is a HCFC and classified as an ozone depleting substance banned under the Montreal Protocol. Many existing R22 VRF Systems will need to be replaced over the coming years by more modern and efficient R410A VRF Systems.

Panasonic takes proactive action to switch to R410A refrigerant

Recognising consumers' anxiety and financial difficulties to adapt to the new R22 regulations, Panasonic developed a new cost-effective and simple solution to switch to R410A refrigerant.

What is Panasonic VRF Renewal?

Panasonic VRF Renewal enables reuse of good quality existing R22 pipe work to be installed with a new high efficiency R410A system.

What's so unique about Panasonic's solution?

By enabling reuse of existing R22 piping, consumers get to save substantially from reduced installation cost, and without any sacrifices to warranty or performance.

Ozone Depletion Potential		
R22	HCFCs	0.055
R410A	HFC	0
R407C	HFC	0

R22 - The reduction of Chlorine critical for a cleaner future

Before renewing piping, be sure to contact an authorised Panasonic dealer for advice.

VRF Renewal

Panasonic's Renewal system allows a completely new VRF system, indoor and outdoor units, to be installed using the existing systems pipe work. Panasonic's advanced technology enables the system to work with previously installed pipe work by managing the working pressure within the system down to R22 (3.3 bar) levels. This ensures the system works safely and efficiently without loss of capacity.

The new equipment has potential to increase COP/EER by using state of the art inverter compressor and heat exchanger technology.

Having contacted your Panasonic supplier regarding pipe work restrictions and gained approval to use the Panasonic Renewal System there are three main tests that have to be carried out to ensure that the system can be used effectively.

Firstly a thorough inspection of the pipe work must be carried out and any damage must be repaired.

Secondly an oil test has to be carried out to ensure that the system has not been subject to a compressor burnout during its lifetime.


Lastly a VRF Renewal Kit (CZ-SLK2) has to be installed within the pipe work to ensure that the system is cleaned of any oil residue.



VRF Renewal Kit (CZ-SLK2) and Sight Glass

The following shows an overview of the VRF Renewal Kit (CZ-SLK2) that is required when existing piping is reused. If the exact tube length and tube size of the existing piping are uncertain, attach a sight glass in accordance with the figure below. It will be used for checking the amount of additional refrigerant charge (calculating the amount in Judgment 4 see page 122).

VRF Renewal Kit: CZ-SLK2

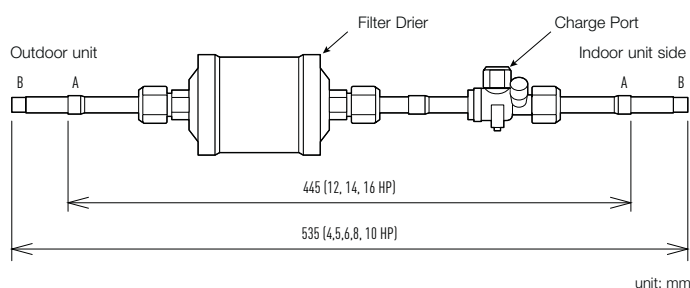

Attaching the Renewal Kit and sight glass

- To adjust the limited pressure level into 3.3 MPa, special setting is necessary on site.
- A filter drier shall be attached to the liquid piping of each outdoor unit.
- Do not need to remove Renewal Kit after a test run is performed as it can be retained for normal operation.
- When attaching Renewal Kit, be extra careful with regards to installation location and orientation of the filter drier and ball valve. Any mistakes will complicate maintenance work.
- Thermal insulation material (field supply: heat resistance of 80°C or higher and thickness of 10 mm or greater) shall be applied to the Renewal Kit.
- The filter drier of the Renewal Kit may need to be replaced depending on the condition of the existing unit. Use a Danfoss DMB 164 as the replacement filter drier (field supply).

Connecting pipe dimensions (Inch mm)


A Ø 1/2 (12.7) (33.5 /40.0 /45.0kW)

B Ø 3/8 (9.52) (22.4 /28.0kW)


Note: If the pipe size does not match that of the existing piping, use a reducer (field supply) to adjust the pipe diameter.

Sight glass (field supply)

If the exact pipe length and pipe size of the existing piping are uncertain, attach a sight glass to the liquid piping, and use it to check whether there is an appropriate amount of additional refrigerant charge.

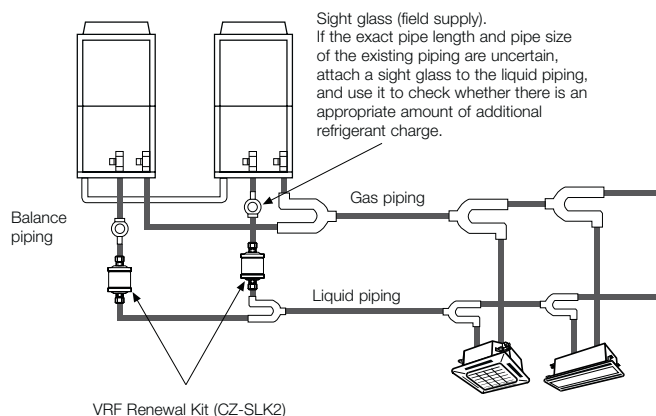

Procedure for VRF Renewal

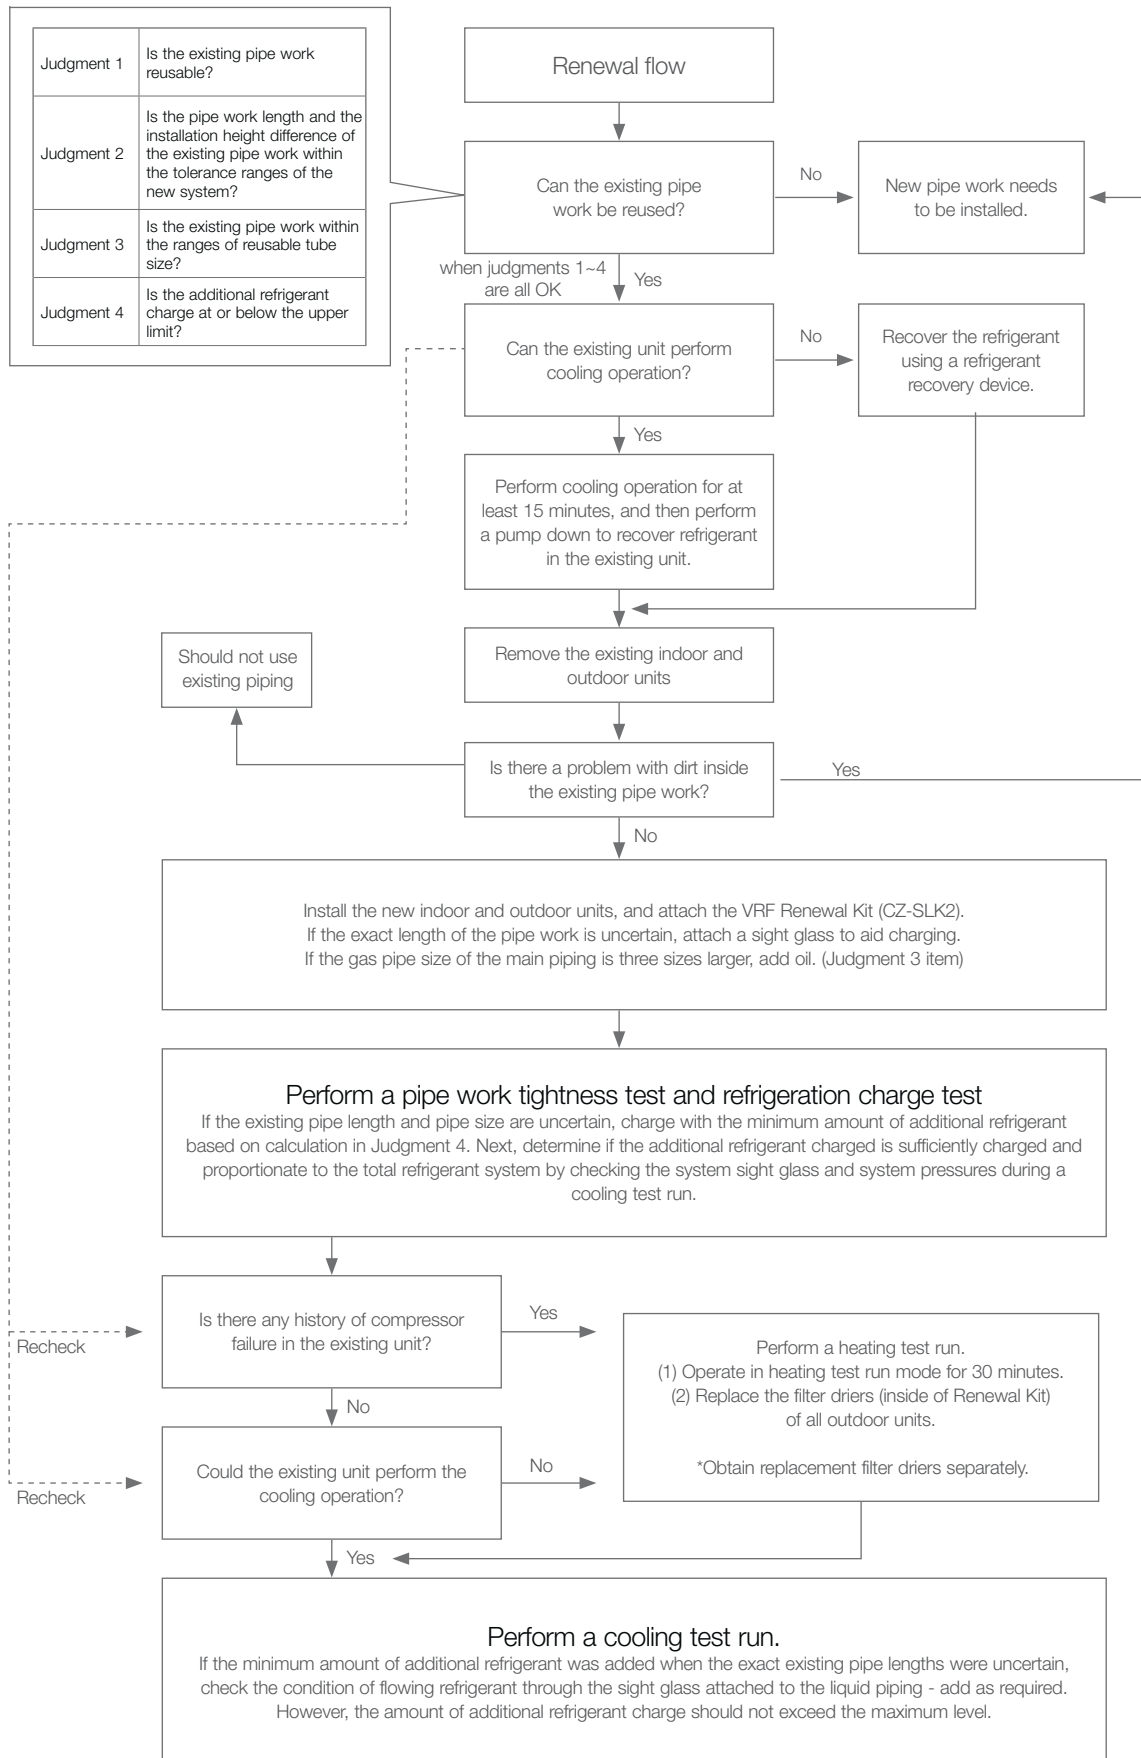



A Globally Trusted Air Conditioning Brand

Since our first air conditioner model was launched 59 years ago the Panasonic Air Conditioning Business Division has grown to become a multinational company recognised around the world. Driven by a never-ending quest for product innovation, the group has evolved from manufacturing compressors to providing comprehensive air conditioning solutions. Panasonic has become a brand that people trust to deliver products with superior quality and reliability.

Panasonic's persistent innovation spurs the evolution of air conditioning solutions.

Starts production of absorption chillers



1971

Introduces first GHP (gas heat pump) VRF air conditioner



1985

1958

- Panasonic (using the National brand) introduces its first Home Cooler, a window-type air conditioner model



- Electrical Appliance Business Group (Kadoma) starts manufacture of Home Coolers
- Sales of Home Coolers begin

1961

- Starts exports of Home Coolers to South Vietnam

1965

- Launches Room Coolers



1968

- Begins development of rotary compressors
- The high efficiency and quality of these compressors draws interest from domestic and overseas air conditioner manufacturers
- External sales begin

1972

- MAICO, the Division's first overseas manufacturing base, established in Malaysia
- Starts exports from MAICO to Japan, Indonesia, Australia, and other markets
- Begins operating twin-base system out of Japan and Malaysia



1983

- Launches inverter air conditioners
- Starts sales of Panasonic's first inverter air conditioners
- Inverters grow to become core technology in air conditioner industry
- Starts shipments of air conditioners to Panasonic America



1985

- Begins development of scroll compressors
- Scroll compressors bring high efficiency, low noise, and low vibration in comparison to rotary compressors

1990


- Launches world's first air conditioner equipped with compact scroll compressor

1993

- Establishes Matsushita-Wanbao (Guangzhou) Air Conditioner (MWAC)
- Establishes Matsushita-Wanbao (Guangzhou) Compressor (MWCC)
- Establishes Matsushita Air Conditioner Engineering (Matsushita ACE)

1995

- Releases world's first large-capacity modular combination VRF system with simultaneous heating/cooling

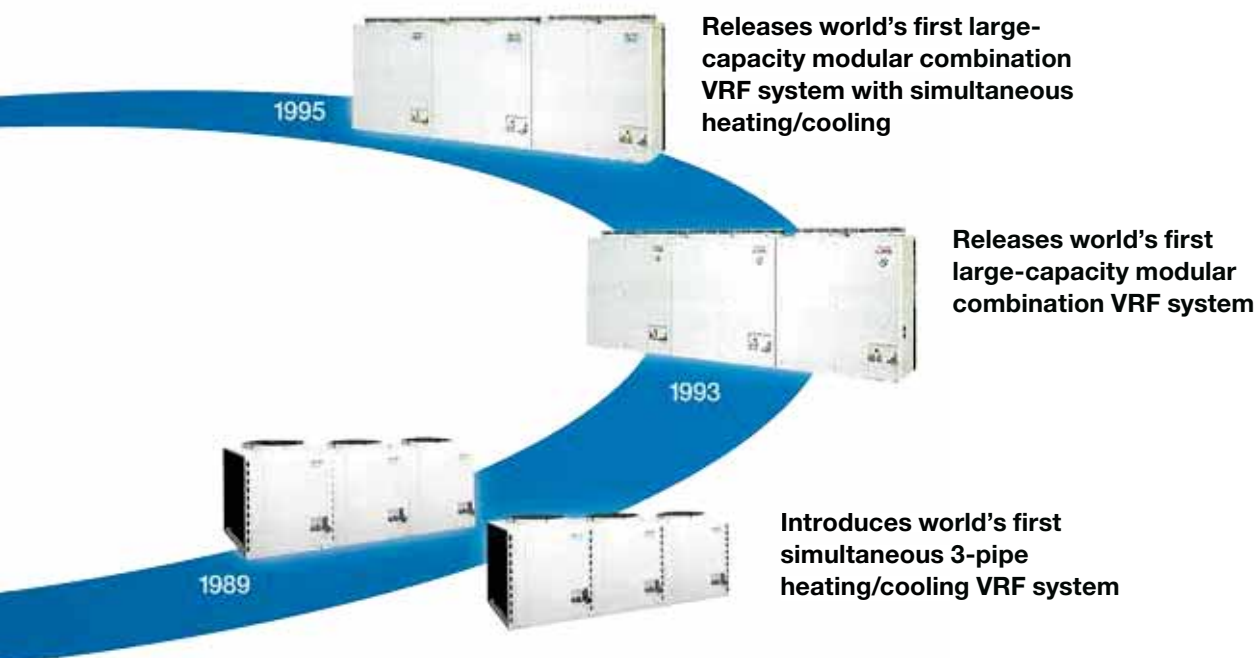

2003

- Debuts quiet, lightweight, compact EcoCute systems with improved energy-saving technology
- EcoCute adopts highly efficient, accumulator-less CO₂ scroll compressor
- Begins production of new energy-saving mini FSV series multi-split packaged air conditioners for residential use
- CO₂ heat-pump hot water heater (EcoCute) uses non-toxic, non-combustible natural refrigerant (CO₂) instead of Freon, to reduce environmental impact
- Launches automatic filter-cleaning function for air conditioners (AC robot)



2005

- Panasonic products become extremely successful in Japan's air conditioner market
- Innovations such as airstream robots and motion sensors help grow Panasonic's market share

2006

- Cumulative global production of Panasonic compressors reaches 200 million units

2008

- Starts air-to-water heat pump business in Europe
- Hot water heating considered eco-friendly alternative to conventional fuel-type heating systems
- At the Energy Conservation Grand Prize awards, Panasonic air conditioners win Chairman's Award, whilst EcoCute wins Director General Prize (prizes presented by Energy Conservation Center of Japan)



2009

- Establishes sales company in Europe (PHAAE) dedicated to selling air conditioners
- Panasonic HA Air-Conditioning Europe (PHAAE) strengthens company's commercial air conditioning business

2010

- Begins collaboration with SANYO air conditioner business
- Through share exchange, SANYO and Panasonic Electric Works become wholly owned subsidiary

2011

- Launches FSV series of large-capacity VRF air conditioners

2012

- New Panasonic Group inaugurated

2013

- Expands VRF operation in Malaysia



Reliability and Durability

At Panasonic, we believe that the best air conditioner is one that works quietly and effectively in the background whilst minimising its impact on the environment. People who use our products can look forward to long years of high-quality performance without the need for constant maintenance.

As part of our rigorous design and development process, Panasonic air conditioners undergo a variety of stringent tests to ensure their effectiveness and long-term reliability. Tests for durability, waterproofing, shock resistance, and noise are conducted on component parts or on the finished products themselves.

As a result of all of these painstaking efforts, Panasonic air conditioners meet even the most demanding industrial standards and regulations in every country where they are sold.



Applying advanced technologies that truly make life better, we live by an unparalleled commitment to product quality. Our approach to product development originates in the DNA of Japanese craftsmanship.

Panasonic is building on the Japanese tradition of uncompromising quality control worldwide, developing and manufacturing fine products and delivering them to customers everywhere.



Durability

At Panasonic we know the importance of a long service life with minimal maintenance. That's why we subject our air conditioners to a wide range of stringent durability tests.



Long-Term Durability Test

To ensure durability and stable operation for many years, we conduct a long-term continuous operation test under conditions that are much more severe than actual operating conditions.



Compressor Reliability Test

After the continuous operation test, we remove the compressor from a selected outdoor unit, disassemble it, and examine the internal mechanisms and parts for potential failure. This helps ensure reliable long-term performance under harsh conditions.



Waterproofing Test

The outdoor unit, which is subject to rain and wind, complies with IPX4 waterproof specifications. Contact sections on printed circuit boards are resin-potted to prevent adverse effects caused by exposure to water (an unlikely occurrence).



A resin-potted circuit board



Testing laboratory Panasonic Gunma, Japan (PAPARS)

International Standard Quality

To uphold the company's reputation around the world, Panasonic strives continuously to offer the highest quality with the lowest possible environment impact.



The strength of the resin material used in a propeller fan is confirmed by a tension test

Reliable Parts That Meet or Exceed Industrial Standards

In every country where they are sold, Panasonic air conditioners comply with all required industrial standards and regulations. In addition, Panasonic conducts stringent testing to ensure the reliability of parts and materials.



RoHS / REACH Compliant Parts

All Panasonic parts and materials comply with Europe's strict RoHS/REACH environmental regulations. During the development and production of parts, stringent inspections are conducted on over 100 materials to ensure that no hazardous substances are included.



Sophisticated Production Process


Panasonic's air conditioner production lines employ state-of-the-art factory automation technologies to ensure products are manufactured efficiently and with uniformly high levels of quality and reliability.

Global Networking of Air Conditioning Solutions

In any indoor environment, eco-friendly air conditioning plays a vital role in maintaining our health, comfort, and productivity. Whether it's an office, a hotel, or a shopping mall, every building matters. That's why Panasonic has developed energy-efficient large-scale air conditioning solutions to suit a variety of business applications.

As one of the pillars of Panasonic's BtoB operations, our air conditioning sector provides comprehensive solutions to businesses around the world. Harnessing our advanced technology and extensive on-site expertise, we serve clients in a diverse range of environments throughout the world.

Panasonic air conditioning solutions are designed from the ground up to meet the specific needs of each location, whilst placing a premium on efficiency and reliability. At every stage, we seek to make optimal use of resources and energy to create solutions that benefit the environment.

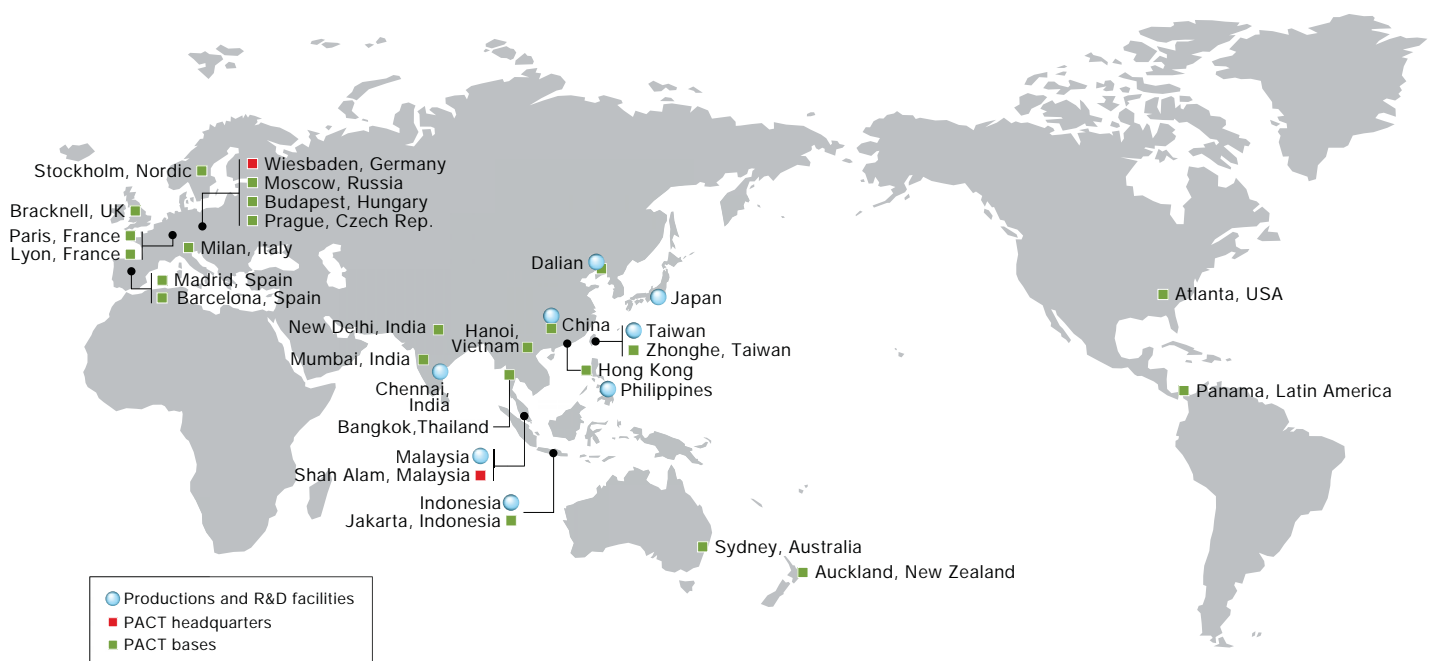

PACT Training Facilities

The 24 Panasonic Air Conditioning Training Centres (PACTs) around the world provide a wide range of support for Panasonic's business-use air conditioning systems. PACT represents Panasonic's unwavering commitment to our sales partners, distributors, and service teams in Europe, Asia, Oceania, and the Americas.



Quality Assurance from Japan to the World

With a diverse network of production and R&D facilities, Panasonic delivers innovative products incorporating cutting-edge technologies that set the standard for air conditioners worldwide. As our business expands globally, we strive to transcend borders with our superior-quality products.

Japan



APACORP
Air Conditioning Division
(Appliances Company) (Shiga, Japan)

Established April 1972

- Appliances Company HQ
- Home Appliances Business Group
- Corporate Engineering Division



PAPARS
Panasonic Appliances Air
Conditioning & Refrigeration
System (Gunma, Japan)

Established July 1959

- Air conditioners
- Cold-chain/refrigeration products

Malaysia



PAPAMY
Panasonic Appliances
Air Conditioning Malaysia
Sdn Bhd.

Established April 1972

- Air conditioners
- Air-to-water heat pumps



PAPARADMY
Panasonic Appliances Air
Conditioning R&D Malaysia
Sdn. Bhd.

Established June 1991

- R&D for air conditioners
- Air-to-water heat pumps



PAPAMY Compressor

Established January 1987

- Rotary compressors for air conditioners



PAPAMY Compressor R&D

Established September 1997

- R&D for rotary compressors

China



PAPAGZ
Panasonic Appliances Air
Conditioning (Guangzhou)
Co., Ltd.

Established June 1993

- Air conditioners



PWAPCGZ
Panasonic Wanbao
Appliances Compressor
(Guangzhou) Co., Ltd.

Established June 1993

- Rotary compressors for air conditioners
- Compressors for automotive air conditioners



PRDCS
Panasonic R&D Center
Suzhou Co., Ltd.

Established April 2002

- Air conditioners
- R&D for home appliance products



PAPARDL
Panasonic Appliances
Air-Conditioning and
Refrigeration (Dalian) Co., Ltd.

Established December 1995

- Air conditioners

Taiwan



PTW
Panasonic Taiwan Co., Ltd.

Established October 1962

- Air conditioners
- Automotive air conditioners
- Home appliance products



PMI
Panasonic Manufacturing
Indonesia

Established September 1965

- Air conditioners
- Home appliance products



PMPC
Panasonic Manufacturing
Philippines Corporation

Established September 1967

- Air conditioners
- Home appliance products



APIN
Appliances Panasonic
Company India

Established December 2012

- Air conditioners

PACT Headquarters and Bases

EUROPE

Germany Wiesbaden



Nordic Stockholm



Hungary Budapest



Russia (CIS) Moscow



Spain Barcelona



Spain Madrid



France Paris



Italy Milan

Czech Rep. Prague

France Lyon

UK Bracknell

ASIA

Malaysia Shah Alam



Vietnam Hanoi



India New Delhi



Thailand Bangkok

Taiwan Zhonghe

Indonesia Jakarta

China

Hong Kong

India Mumbai

OCEANIA

Australia Sydney

New Zealand Auckland

AMERICAS

Latin America Panama



USA Atlanta



Panasonic VRF Global Project References

Panasonic air conditioning systems provide comprehensive solutions to businesses around the world. Harnessing our advanced technology and extensive on-site expertise, we serve clients in a diverse range of environments throughout the world.

HOTEL

Australia Travelodge Hobart



Air Conditioning System:
VRF 3-pipe FSV MF2 series 8 systems
Indoor Units: 116 units
Cooling Capacity:
302 kW / 86 USRT



Indonesia Patra Jasa Hotel



Air Conditioning System:
VRF 2-pipe FSV ME1 series 14 systems
Indoor Units: 132 units
Cooling Capacity:
677 kW / 193 USRT



Spain Hotel Claris 5 GL



Air Conditioning System:
VRF 2-pipe ECOi ME1&LE1 series 11 systems
VRF 3-pipe ECOi MF1 series 14 systems
Indoor Units: 233 units
Cooling Capacity:
769 kW / 218 USRT



Siberia River Park Hotel



Air Conditioning System:
VRF 2-pipe ECOi ME1 series 47 systems
Indoor Units: 96 units
Cooling Capacity: 788 kW / 224 USRT

OFFICE

Malaysia Gapurna project



Air Conditioning System:
VRF 2-pipe FSV ME1 series 109 systems
Indoor Units: 537 units
Cooling Capacity:
5,370 kW / 1,526 USRT



Malaysia Plaza 33 Office Block A



Air Conditioning System:
VRF 2-pipe FSV ME1 series 99 systems
Indoor Units: 153 units
Cooling Capacity:
3,667 kW / 1,042 USRT



Thailand Areeya



Air Conditioning System:
VRF 2-pipe FSV ME1 series 19 systems
Single split system 67 systems
Indoor Units: 85 units
Cooling Capacity:
1,519 kW / 432 USRT



Hong Kong King Yip Road



Air Conditioning System:
VRF FSM LA1 series 136 systems
Indoor Units: 294 units
Cooling Capacity:
2,108 kW / 599 USRT



New Zealand 151 Cambridge Terrace



Air Conditioning System:
VRF 3-pipe FSV MF2 series: 20 systems
Indoor Units: 75 units
Cooling Capacity:
850 kW / 242 USRT



New Zealand IAG Christchurch



Air Conditioning System:
VRF 3-pipe FSV MF2 series: 25 systems
Indoor Units: 132 units
Cooling Capacity:
976 kW / 278 USRT



Spain PTA Malaga



Air Conditioning System:
VRF 2-pipe ECOi ME1 series 20 systems
Indoor Units: 74 units
Cooling Capacity:
908 kW / 258 USRT



Russia Russian Government Building



Air Conditioning System:
VRF 2-pipe ECOi ME1 series 42 systems
Indoor Units: 277 units
Cooling Capacity:
2,045 kW / 581 USRT

RETAIL

Italy Le Centurie CENTRO COMMERCIALE



Air Conditioning System:
VRF 3-pipe ECOi MF1 series
18 systems
Indoor Units: 57 units
Cooling Capacity:
656 kW / 186 USRT



India Sai Aarav Motors, Mehsana



Air Conditioning System:
VRF 2-pipe FSV ME1 series 3 systems
Indoor Units: 19 units
Cooling Capacity: 156 kW / 44 USRT

Thailand Jiffy Plus Supermarket



Total 49 branches in Thailand Region
Air Conditioning System:
VRF 2-pipe FSV ME1 series:
49 systems
Indoor Units: 191 units
Cooling Capacity:
3,590 kW / 1,020 USRT



HOSPITAL

Indonesia Bekasi Hospital



Air Conditioning System:
VRF 2-pipe FSV ME1 series
42 systems
Indoor Units: 283 units
Cooling Capacity:
1,834 kW / 524 USRT



Indonesia Persada Hospital



Air Conditioning System:
VRF 2-pipe FSV ME1 series
21 systems
Indoor Units: 116 units
Cooling Capacity:
989 kW / 281 USRT



United States Shippensburg University



Air Conditioning System:
VRF 3-pipe ECOi MF1 series
55 systems
Indoor Units: 530 units
Cooling Capacity:
1,498 kW / 426 USRT



Thailand Kalasin College of Dramatic Arts



Air Conditioning System:
VRF 2-pipe FSV ME1 series:
5 systems
Indoor Units: 53 units
Cooling Capacity:
646 kW / 184 USRT



RESIDENTIAL

China Star River Group Luxury Condominium



Air Conditioning System:
VRF Master series 966 systems
Indoor Units: 3,948 systems
Cooling Capacity:
16,737 kW / 4,755 USRT



Spain Xativa GHP



Air Conditioning System:
Gas-driven VRF 2-pipe
ECO G 8 systems
Indoor Units: Hydrokit water
heat exchanger: 8 units
Cooling Capacity: 624 kW / 177 USRT



Hong Kong Gloucester Road Project



Air Conditioning System:
VRF FSM LA1 series 67 systems
Twenty series 105 systems
Indoor Units: 255 units
Cooling Capacity: 1,391 kW / 395 USRT

Hong Kong The Green Project



Air Conditioning System:
VRF FSM LA1 series 239 systems
Twenty series 538 systems
Indoor Units: 999 units
Cooling Capacity:
6,425 kW / 1,825 USRT



Panama Mosaic Building PANAMA PACIFICO



Air Conditioning System:
VRF 2-pipe FSV LE1 series 156 systems
Indoor Units: 357 units
Cooling Capacity: 2,338 kW / 664 USRT

Australia Macquarie Central



Air Conditioning System:
VRF 3-pipe FSV MF2 series:
13 systems
Indoor Units: 144 units
Cooling Capacity:
768 kW / 218 USRT




ONLY PANASONIC GETS 5 STARS

AGAIN, AGAIN & AGAIN



- Reliability • Functionality • Ease of use
- Value for money • After sales service • Overall customer satisfaction.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

Panasonic Australia Pty. Limited.
1 Innovation Road, Macquarie Park, NSW 2113.

www.panasonic.com.au

ACN 001 592 187 ABN 83 001 592 187

• Specifications are subject to change without prior notice for further improvement • The contents of this catalogue are effective as of August 2017.
• Due to printing considerations, the actual colours may vary slightly from those shown • All graphics are provided merely for the purpose of illustrating a point.